
ANNA Black pendant lamp
Ref. 22032

IP20






Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	4
Energy class light source	G
Light source	SMD LED
Luminous Flux (lm)	205
Color temperature (K)	2700K
Opening angle degrees	18
CRI	90
Supply current	500 mA
Cable length	1500 mm
Structure material	Aluminium
Shade material	Aluminium
Diffuser material	PMMA
Structure finish	Black
Shade finish	Black
Diffuser finish	Transparent

Energy label

Photometric

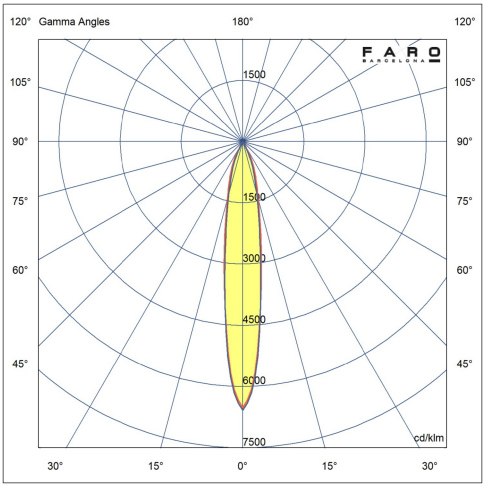

ANNA Black pendant lamp
Ref. 22032



ANNA White pendant lamp
Ref. 22033


IP20




Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	4
Energy class light source	G
Light source	SMD LED
Luminous Flux (lm)	205
Color temperature (K)	2700K
Opening angle degrees	18
CRI	90
Supply current	500 mA
Cable length	1500 mm
Structure material	Aluminium
Shade material	Aluminium
Diffuser material	PMMA
Structure finish	White
Shade finish	White
Diffuser finish	Transparent

Energy label

Photometric



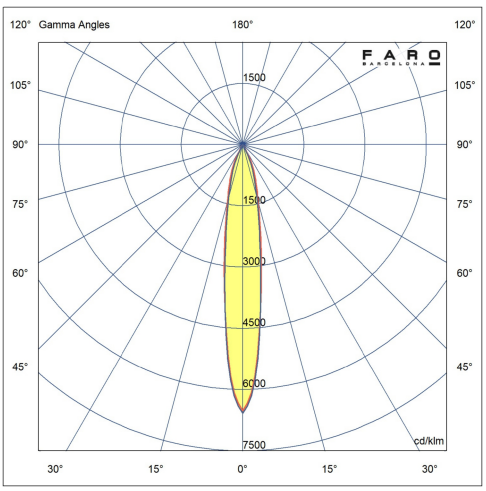


ANNA NESO Black pendant lamp 6W 2700K


Ref. 6011092712

IP20





***250 mm para DALI y CASAMBI**
*250 mm for DALI and CASAMBI

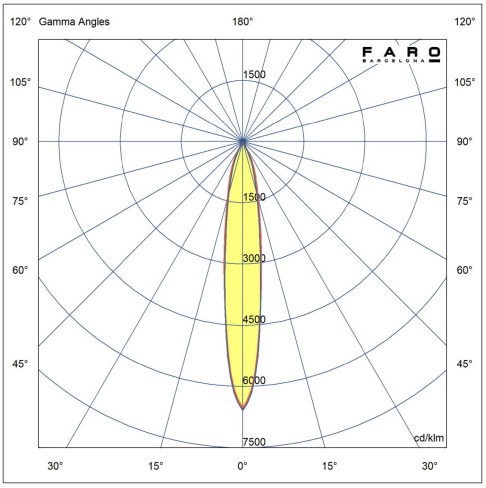

Mounting	CARRIL NESO SLIM
Voltage (V)	24VDC
Hertz	50/60Hz
Class	II
IP	20
Power (W)	6
Light source	SMD LED
Color temperature (K)	2700K
Opening angle degrees	18
CRI	90
Control System	On/off
Supply current	300 mA
Cable length	1500 mm
Shade material	Aluminium
Diffuser material	PMMA
Structure finish	Black
Shade finish	Black
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric


ANNA NESO Black pendant lamp 6W 2700K DALI

Ref. 6011092712d


IP20



DALI



***250 mm para DALI y CASAMBI**
*250 mm for DALI and CASAMBI

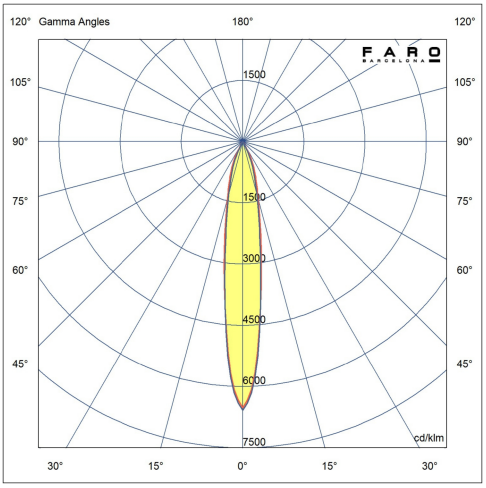

Mounting	CARRIL NESO SLIM
Voltage (V)	24VDC
Hertz	50/60Hz
Class	II
IP	20
Power (W)	6
Light source	SMD LED
Color temperature (K)	2700K
Opening angle degrees	18
CRI	90
Control System	DALI
Supply current	300 mA
Cable length	1500 mm
Shade material	Aluminium
Diffuser material	PMMA
Structure finish	Black
Shade finish	Black
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric


ANNA NESO Black pendant lamp 6W 2700K CASAMBI

Ref. 6011092712w


IP20



CASAMBI



***250 mm para DALI y CASAMBI**
*250 mm for DALI and CASAMBI

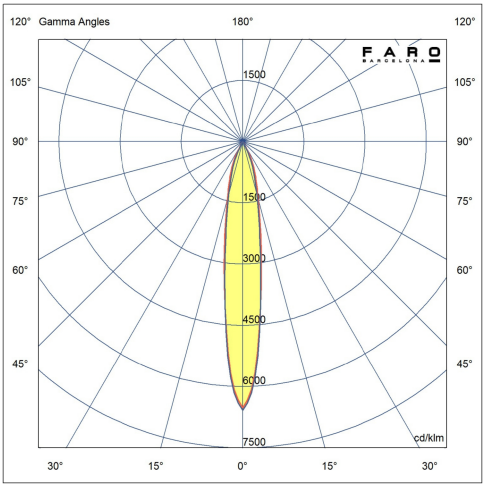

Mounting	CARRIL NESO SLIM
Voltage (V)	24VDC
Hertz	50/60Hz
Class	II
IP	20
Power (W)	6
Light source	SMD LED
Color temperature (K)	2700K
Opening angle degrees	18
CRI	90
Control System	CASAMBI
Supply current	300 mA
Cable length	1500 mm
Shade material	Aluminium
Diffuser material	PMMA
Structure finish	Black
Shade finish	Black
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric