FLIC Black recessed adjustable MR11 GU10


Ref. 44109



IP20

Mounting	Ceiling
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Light source	GU10 LED
Bulb format	MR11
Number of lamp holders	1
Light orientation	Direct
Tilt angles	25
Rotation angles 2	360
Suitable for seaside areas	No
Structure material	Aluminium
Structure finish	Black
Cut-out Size for Recessed Mount	ø 50
Minimum Recessed Height (mm)	110
Maximum Ceiling Thickness (mm)	15

Installation instructions



Recommended bulbs



Bulb MR11 GU10 3W 2700K 38° Glass

Reference	17537
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	220
Color temperature (K)	2700K
Opening angle degrees	38



Bulb MR11 GU10 3W 3000K 38° Glass

Reference	17538
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	230
Color temperature (K)	3000K
Opening angle degrees	38

FLIC White recessed adjustable MR11 GU10


Ref. 44108




IP20

Mounting	Ceiling
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Light source	GU10 LED
Bulb format	MR11
Number of lamp holders	1
Light orientation	Direct
Tilt angles	25
Rotation angles 2	360
Suitable for seaside areas	No
Structure material	Aluminium
Structure finish	White
Cut-out Size for Recessed Mount	ø 50
Minimum Recessed Height (mm)	110
Maximum Ceiling Thickness (mm)	15

Installation instructions





FLIC White recessed adjustable MR11 GU10
Ref. 44108

Recommended bulbs



Bulb MR11 GU10 3W 2700K 38° Glass

Reference	17537
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	220
Color temperature (K)	2700K
Opening angle degrees	38



Bulb MR11 GU10 3W 3000K 38° Glass

Reference	17538
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	230
Color temperature (K)	3000K
Opening angle degrees	38

FLIC White recessed adjustable trimless MR11 GU10


Ref. 44110


IP20



Mounting	Ceiling
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Light source	GU10 LED
Bulb format	MR11
Number of lamp holders	1
Light orientation	Direct
Tilt angles	25
Rotation angles 2	360
Suitable for seaside areas	No
Structure material	Aluminium
Structure finish	White
Cut-out Size for Recessed Mount	ø 60
Minimum Recessed Height (mm)	110
Maximum Ceiling Thickness (mm)	30

Installation instructions





FLIC White recessed adjustable trimless MR11 GU10

Ref. 44110

Recommended bulbs



Bulb MR11 GU10 3W 2700K 38° Glass

Reference	17537
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	220
Color temperature (K)	2700K
Opening angle degrees	38



Bulb MR11 GU10 3W 3000K 38° Glass

Reference	17538
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	230
Color temperature (K)	3000K
Opening angle degrees	38

FLIC Black recessed adjustable trimless MR11 GU10


Ref. 44111


IP20



Mounting	Ceiling
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Light source	GU10 LED
Bulb format	MR11
Number of lamp holders	1
Light orientation	Direct
Tilt angles	25
Rotation angles 2	360
Suitable for seaside areas	No
Structure material	Aluminium
Structure finish	Black
Cut-out Size for Recessed Mount	ø 60
Minimum Recessed Height (mm)	110
Maximum Ceiling Thickness (mm)	30

Installation instructions





FLIC Black recessed adjustable trimless MR11 GU10
Ref. 44111

Recommended bulbs



Bulb MR11 GU10 3W 2700K 38° Glass

Reference	17537
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	220
Color temperature (K)	2700K
Opening angle degrees	38




Bulb MR11 GU10 3W 3000K 38° Glass

Reference	17538
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	230
Color temperature (K)	3000K
Opening angle degrees	38

FLIC 2L White recessed adjustable trimless MR11 GU10


Ref. 44112

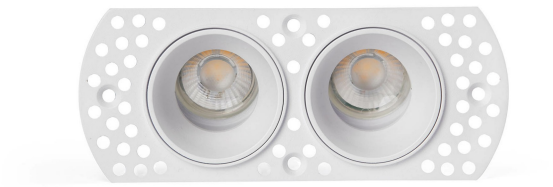

IP20

Mounting	Ceiling
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Light source	GU10 LED
Bulb format	MR11
Number of lamp holders	1
Light orientation	Direct
Tilt angles	25
Rotation angles 2	360
Suitable for seaside areas	No
Structure material	Aluminium
Structure finish	White
Cut-out Size for Recessed Mount	100x52
Minimum Recessed Height (mm)	110
Maximum Ceiling Thickness (mm)	15

Installation instructions



FLIC 2L White recessed adjustable trimless MR11 GU10

Ref. 44112

Recommended bulbs



Bulb MR11 GU10 3W 2700K 38° Glass

Reference	17537
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	220
Color temperature (K)	2700K
Opening angle degrees	38



Bulb MR11 GU10 3W 3000K 38° Glass

Reference	17538
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	230
Color temperature (K)	3000K
Opening angle degrees	38

FLIC 2L Black recessed adjustable trimless MR11 GU10


Ref. 44113

IP20



Mounting	Ceiling
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Light source	GU10 LED
Bulb format	MR11
Number of lamp holders	1
Light orientation	Direct
Tilt angles	25
Rotation angles 2	360
Suitable for seaside areas	No
Structure material	Aluminium
Structure finish	Black
Cut-out Size for Recessed Mount	100x52
Minimum Recessed Height (mm)	110
Maximum Ceiling Thickness (mm)	15

Installation instructions



FLIC 2L Black recessed adjustable trimless MR11 GU10
Ref. 44113

Recommended bulbs



Bulb MR11 GU10 3W 2700K 38° Glass

Reference	17537
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	220
Color temperature (K)	2700K
Opening angle degrees	38



Bulb MR11 GU10 3W 3000K 38° Glass

Reference	17538
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	230
Color temperature (K)	3000K
Opening angle degrees	38

FLIC 3L White recessed adjustable trimless MR11 GU10


Ref. 44114

IP20



Mounting	Ceiling
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Light source	GU10 LED
Bulb format	MR11
Number of lamp holders	3
Light orientation	Direct
Tilt angles	25
Rotation angles 2	360
Suitable for seaside areas	No
Structure material	Aluminium
Structure finish	White
Cut-out Size for Recessed Mount	158x52
Minimum Recessed Height (mm)	110
Maximum Ceiling Thickness (mm)	15

Installation instructions

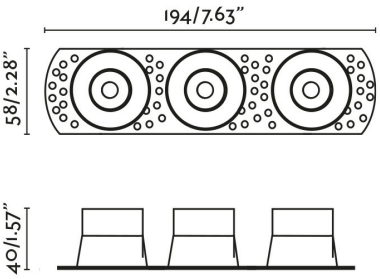

FLIC 3L White recessed adjustable trimless MR11 GU10

Ref. 44114

Recommended bulbs



Bulb MR11 GU10 3W 2700K 38° Glass

Reference	17537
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	220
Color temperature (K)	2700K
Opening angle degrees	38



Bulb MR11 GU10 3W 3000K 38° Glass

Reference	17538
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	230
Color temperature (K)	3000K
Opening angle degrees	38

FLIC 3L Black recessed adjustable trimless MR11 GU10


Ref. 44115

IP20



Mounting	Ceiling
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Light source	GU10 LED
Bulb format	MR11
Number of lamp holders	1
Light orientation	Direct
Tilt angles	25
Rotation angles 2	360
Suitable for seaside areas	No
Structure material	Aluminium
Structure finish	Black
Cut-out Size for Recessed Mount	158x52
Minimum Recessed Height (mm)	110
Maximum Ceiling Thickness (mm)	15

Installation instructions

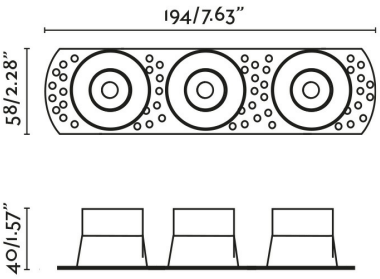

FLIC 3L Black recessed adjustable trimless MR11 GU10
Ref. 44115

Recommended bulbs



Bulb MR11 GU10 3W 2700K 38° Glass

Reference	17537
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	220
Color temperature (K)	2700K
Opening angle degrees	38



Bulb MR11 GU10 3W 3000K 38° Glass

Reference	17538
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	3
Luminous Flux (lm)	230
Color temperature (K)	3000K
Opening angle degrees	38