
FONOVIA 2400 Grey pendant lamp 50W 3000K

Ref. 20107 |FARO LAB

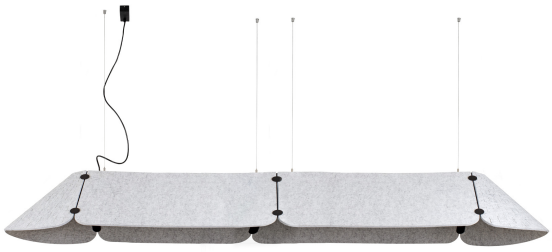



IP20

Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	50
Light source	SMD LED
Lifespan	50.000h L80 B10
Luminous Flux (lm)	3600
Color temperature (K)	3000K
CRI	>80
Supply current	700 mA
Cable length	2000 mm
Structure material	Steel + Recycled PET
Shade material	Recycled PET
Diffuser material	PC
Structure finish	Matt Black+Light Grey
Diffuser finish	Opal

Installation instructions


Photometric

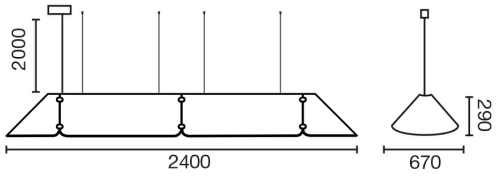


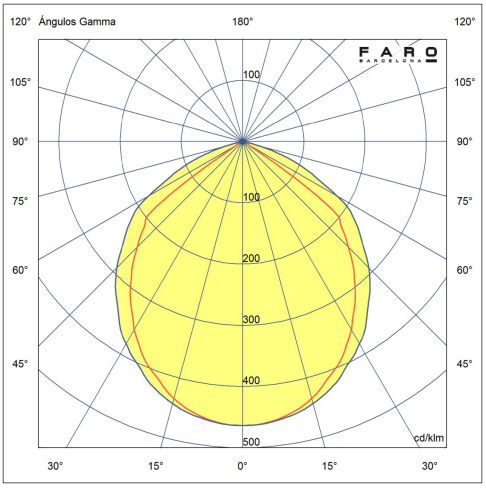


FONOVIA 1560 Grey pendant lamp 25W 3000K

Ref. 20110 |FARO LAB

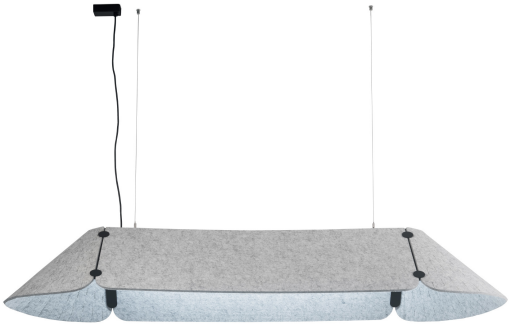

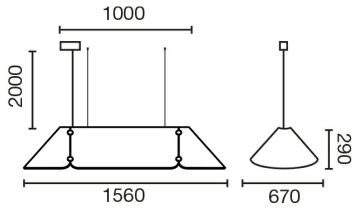

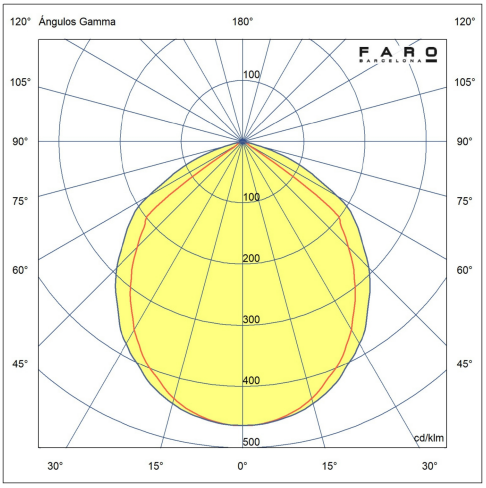

IP20

Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	25
Energy class light source	C
Light source	SMD LED
Lifespan	50.000h L80 B10
Luminous Flux (lm)	1800
Color temperature (K)	3000K
CRI	>80
Supply current	700 mA
Cable length	2000 mm
Structure material	Steel + Recycled PET
Shade material	Recycled PET
Diffuser material	PC
Structure finish	Matt Black+Light Grey
Diffuser finish	Opal


Installation instructions

Energy label

Photometric

FONOVIA 1560 Grey pendant lamp 25W 4000K

Ref. 20109 |FARO LAB

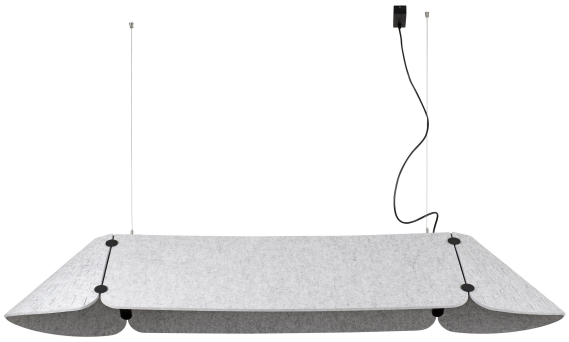

Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	25
Light source	SMD LED
Lifespan	50.000h L80 B10
Luminous Flux (lm)	1900
Color temperature (K)	4000K
CRI	>80
Supply current	700 mA
Cable length	2000 mm
Structure material	Steel + Recycled PET
Shade material	Recycled PET
Diffuser material	PC
Structure finish	Matt Black+Light Grey
Diffuser finish	Opal

Installation instructions

Photometric

