MOY Chrome wall/ceiling lamp
Ref. 40091 |NAHTRANG

IP44





Mounting	Wall, Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	4
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B50
Power factor	0.4
Luminous Flux (lm)	260
Color temperature (K)	3000K
Opening angle degrees	115
Light orientation	Direct
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	350 mA
Structure material	Steel
Diffuser material	Glass
Structure finish	Chrome
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



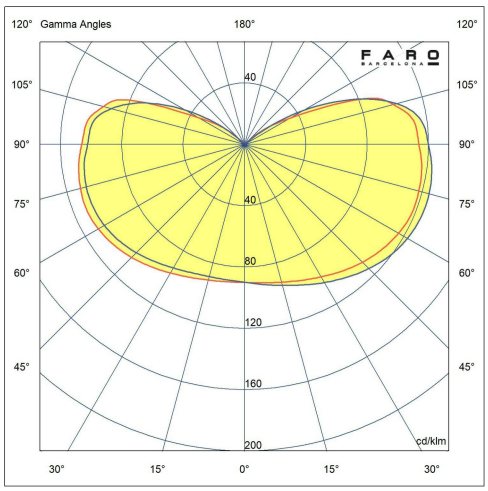

MOY Bronze wall/ceiling lamp
Ref. 40092 |NAHTRANG

IP44





Mounting	Wall, Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	4
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B50
Power factor	0.4
Luminous Flux (lm)	260
Color temperature (K)	3000K
Opening angle degrees	115
Light orientation	Direct
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	350 mA
Structure material	Steel
Diffuser material	Glass
Structure finish	Bronze
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



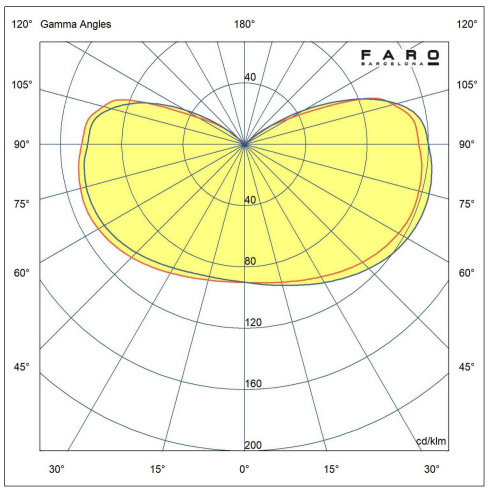

MOY Gold wall/ceiling lamp
Ref. 40090 |NAHTRANG

IP44





Mounting	Wall, Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	4
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B50
Power factor	0.4
Luminous Flux (lm)	260
Color temperature (K)	3000K
Opening angle degrees	115
Light orientation	Direct
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	350 mA
Structure material	Steel
Diffuser material	Glass
Structure finish	Satin Gold
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



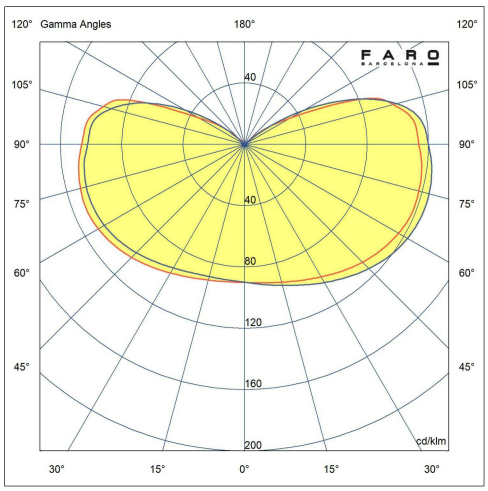

MOY Gold wall/ceiling lamp
Ref. 40090 |NAHTRANG



MOY Black wall/ceiling lamp
Ref. 40093 |NAHTRANG

IP44





Mounting	Wall, Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	4
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B50
Power factor	0.4
Luminous Flux (lm)	260
Color temperature (K)	3000K
Opening angle degrees	115
Light orientation	Direct
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	350 mA
Structure material	Steel
Diffuser material	Glass
Structure finish	Matt Black
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



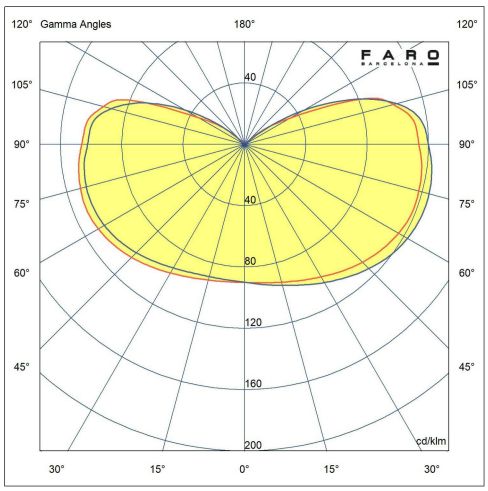

MOY Black wall/ceiling lamp
Ref. 40093 |NAHTRANG

