PILL Dark grey wall lamp
Ref. 70825

IK06 IP54





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	54
IK	06
Power (W)	3,5
Energy class light source	G
Light source	COB LED
Luminous Flux (lm)	156
Color temperature (K)	3000K
Light orientation	Indirect lighting
CRI	>80
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Dark Grey
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



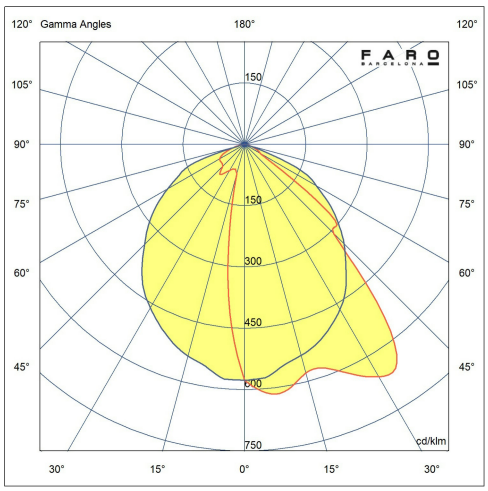

PILL White wall lamp
Ref. 70824

IK06 IP54





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	54
IK	06
Power (W)	3,5
Energy class light source	G
Light source	COB LED
Luminous Flux (lm)	156
Color temperature (K)	3000K
Light orientation	Indirect lighting
CRI	>80
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Matt White
Diffuser finish	Opal

Installation instructions

Energy label


Photometric



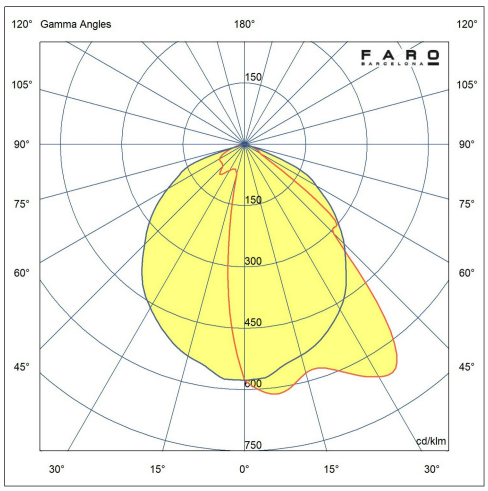

PILL Rust brown wall lamp
Ref. 70826

IK06 IP54

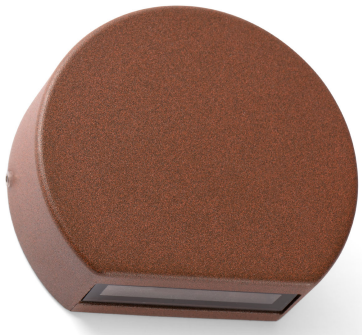



Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	54
IK	06
Power (W)	3,5
Energy class light source	G
Light source	COB LED
Luminous Flux (lm)	156
Color temperature (K)	3000K
Light orientation	Indirect lighting
CRI	>80
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Rust Brown
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



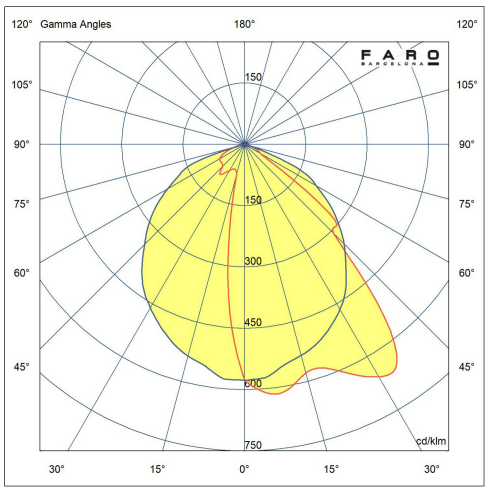

PILL Rust brown wall lamp
Ref. 70826