ARIS White ceiling lamp 20W
Ref. 68625

IP20





Mounting	Ceiling, Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	20
Energy class light source	E
Light source	SMD LED
Luminous Flux (lm)	1528
Color temperature (K)	2700K
Opening angle degrees	110
CRI	≥90
Structure material	Aluminium
Diffuser material	PC
Structure finish	White
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



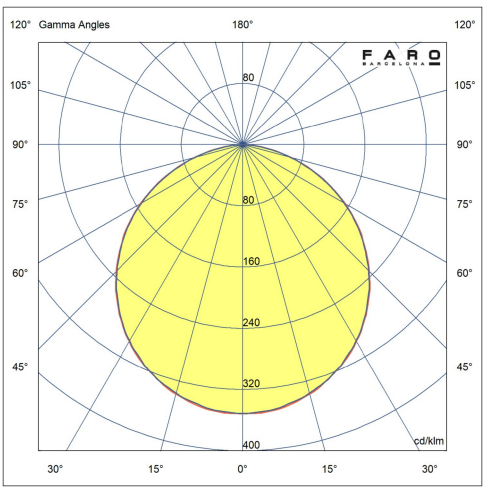

FARO
BARCELONA

ARIS White ceiling lamp 20W
Ref. 68625



ARIS Plafón negro 20W
Ref. 68626

IP20





Fijación	Techo, Pared
Voltaje (V)	220V-240V
Hercios	50/60Hz
Clase	II
IP	20
Potencia (W)	20
Clase energética fuente de luz	E
Fuente de luz	SMD LED
Flujo luminoso (lm)	1528
Temperatura de color (K)	2700K
Grados de apertura	110
CRI	≥90
Material estructura	Aluminio
Material difusor	PC
Acabado estructura	Negro
Acabado difusor	Opal

Instrucciones de instalación

Etiqueta energética

Fotométrica



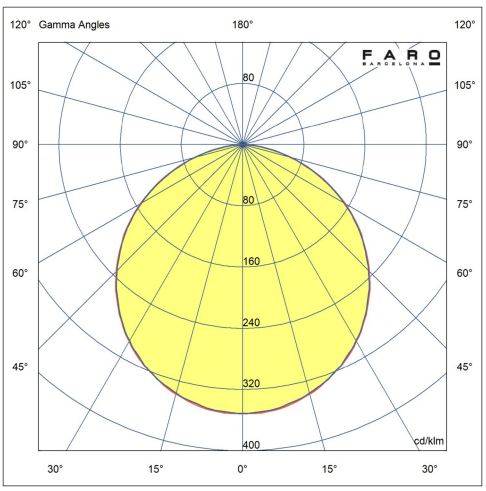

ARIS White ceiling lamp 30W
Ref. 68627

IP20





Mounting	Ceiling, Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	30
Energy class light source	E
Light source	SMD LED
Luminous Flux (lm)	2797
Color temperature (K)	2700K
Opening angle degrees	110
CRI	≥90
Structure material	Aluminium
Diffuser material	PC
Structure finish	White
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



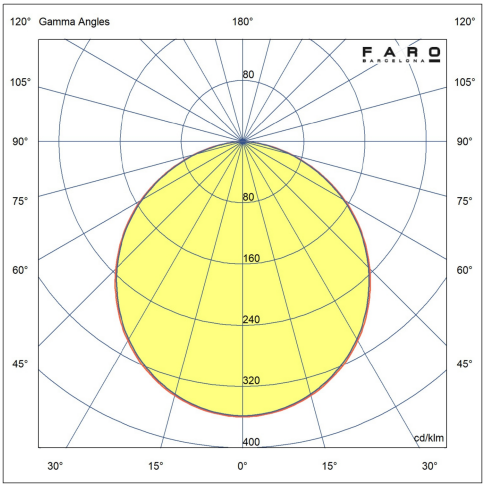

ARIS Black ceiling lamp 30W
Ref. 68628

IP20



Mounting	Ceiling, Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	30
Energy class light source	E
Light source	SMD LED
Luminous Flux (lm)	2797
Color temperature (K)	2700K
Opening angle degrees	110
CRI	≥90
Structure material	Aluminium
Diffuser material	PC
Structure finish	Black
Diffuser finish	Opal

Installation instructions

Energy label

Photometric

