

BACKLIGHT ceiling white 36W 3000K 90° DALI

Ref. 036484091d

IP20



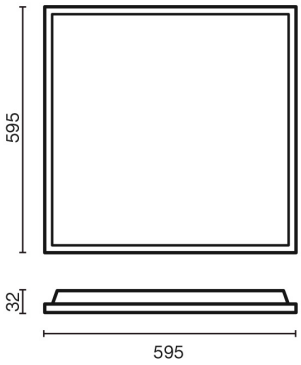

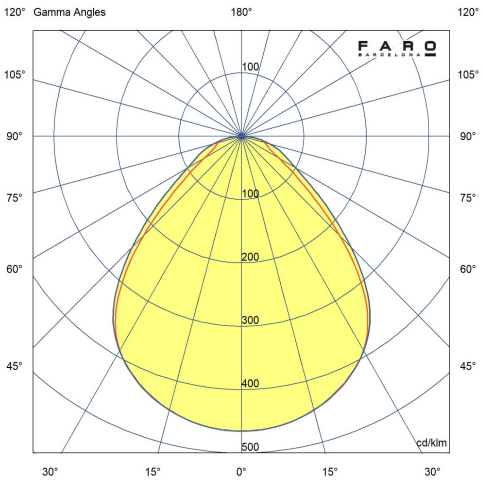

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	36
Light source	SMD LED
Incandescent wire	650
Lifespan	50.000h L80 B10
Power factor	0.9
Luminous Flux (lm)	4499
Color temperature (K)	3000K
Opening angle degrees	90
Light orientation	Direct
Photobiological risk	2
UGR	19
CRI	80
Suitable for seaside areas	No
Control System	On/off
Supply current	900 mA
Driver regulation type	DALI
Structure material	Aluminium
Diffuser material	PVC
Diffuser finish	Opal
Maximum Ceiling Thickness (mm)	2
Includes recessed box	No
Included Accessory	NO

Installation instructions


Photometric

BACKLIGHT ceiling white 36W 3000K 90°

Ref. 036383091

IP20



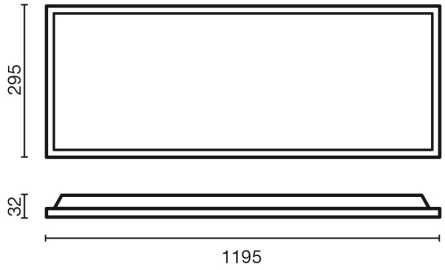


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	36
Energy class light source	E
Light source	SMD LED
Incandescent wire	650
Lifespan	50.000h L80 B10
Power factor	0.9
Luminous Flux (lm)	4499
Color temperature (K)	3000K
Opening angle degrees	90
Light orientation	Direct
Photobiological risk	2
UGR	19
CRI	80
Suitable for seaside areas	No
Control System	On/off
Supply current	900 mA
Structure material	Aluminium
Diffuser material	PVC
Diffuser finish	Opal
Maximum Ceiling Thickness (mm)	2
Includes recessed box	No
Included Accessory	NO

Installation instructions

Energy label

Photometric

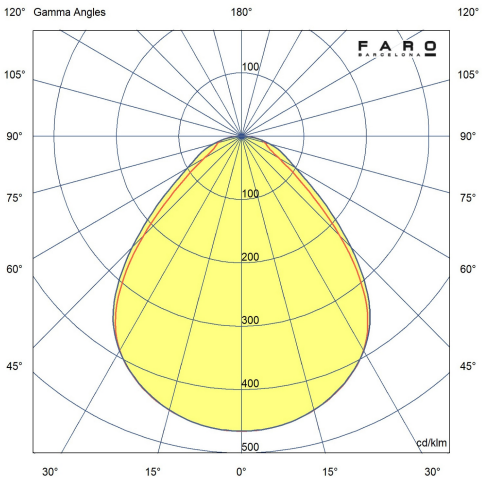


BACKLIGHT ceiling white 36W 3000K 90° DALI

Ref. 036383091d

IP20



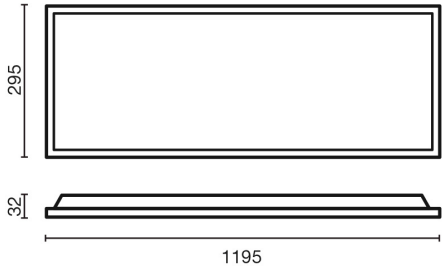


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	36
Energy class light source	E
Light source	SMD LED
Incandescent wire	650
Lifespan	50.000h L80 B10
Power factor	0.9
Luminous Flux (lm)	4499
Color temperature (K)	3000K
Opening angle degrees	90
Light orientation	Direct
Photobiological risk	2
UGR	19
CRI	80
Suitable for seaside areas	No
Control System	On/off
Supply current	900 mA
Driver regulation type	DALI
Structure material	Aluminium
Diffuser material	PVC
Diffuser finish	Opal
Maximum Ceiling Thickness (mm)	2
Includes recessed box	No
Included Accessory	NO

Installation instructions

Energy label

Photometric

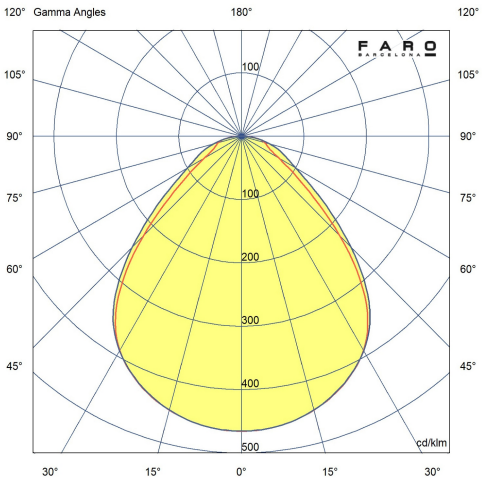


BACKLIGHT ceiling white 36W 4000K 90°

Ref. 036384091

IP20




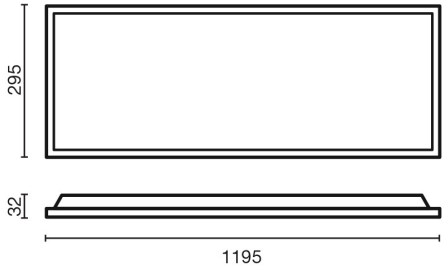

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	36
Light source	SMD LED
Incandescent wire	650
Lifespan	50.000h L80 B10
Power factor	0.9
Luminous Flux (lm)	4499
Color temperature (K)	3000K
Opening angle degrees	90
Light orientation	Direct
Photobiological risk	2
UGR	19
CRI	80
Suitable for seaside areas	No
Control System	On/off
Supply current	900 mA
Structure material	Aluminium
Diffuser material	PVC
Diffuser finish	Opal
Maximum Ceiling Thickness (mm)	2
Includes recessed box	No
Included Accessory	NO

Installation instructions

Photometric

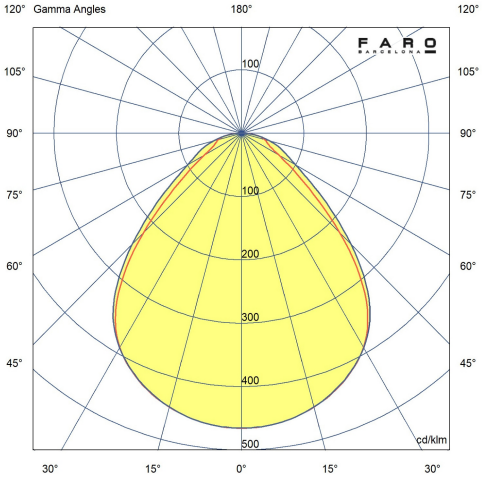


BACKLIGHT ceiling white 36W 4000K 90° DALI

Ref. 036384091d

IP20




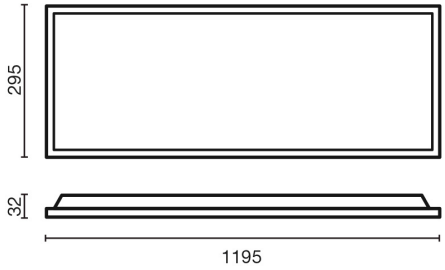

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	36
Light source	SMD LED
Incandescent wire	650
Lifespan	50.000h L80 B10
Power factor	0.9
Luminous Flux (lm)	4499
Color temperature (K)	3000K
Opening angle degrees	90
Light orientation	Direct
Photobiological risk	2
UGR	19
CRI	80
Suitable for seaside areas	No
Control System	On/off
Supply current	900 mA
Driver regulation type	DALI
Structure material	Aluminium
Diffuser material	PVC
Diffuser finish	Opal
Maximum Ceiling Thickness (mm)	2
Includes recessed box	No
Included Accessory	NO

Installation instructions

Photometric

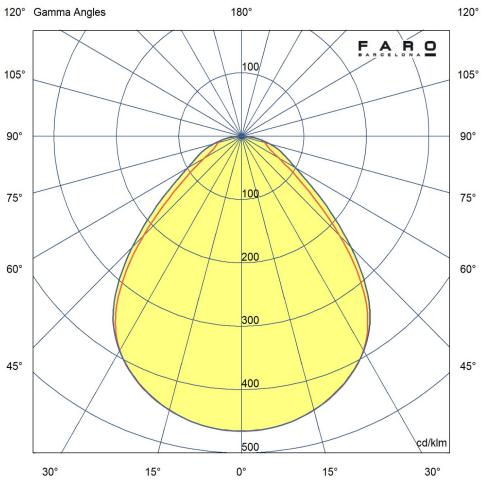


FARO BARCELONA

BACKLIGHT ceiling white 36W 3000K 90°

Ref. 036483091

IP20



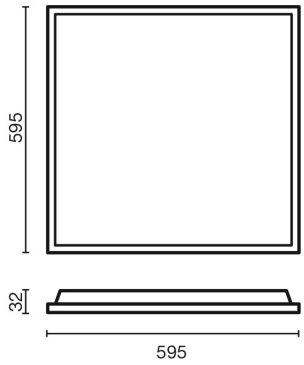


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	36
Energy class light source	E
Light source	SMD LED
Incandescent wire	650
Lifespan	50.000h L80 B10
Power factor	0.9
Luminous Flux (lm)	4499
Color temperature (K)	3000K
Opening angle degrees	90
Light orientation	Direct
Photobiological risk	2
UGR	19
CRI	80
Suitable for seaside areas	No
Control System	On/off
Supply current	900 mA
Structure material	Aluminium
Diffuser material	PVC
Diffuser finish	Opal
Maximum Ceiling Thickness (mm)	2
Includes recessed box	No
Included Accessory	NO

Installation instructions

Energy label

Photometric

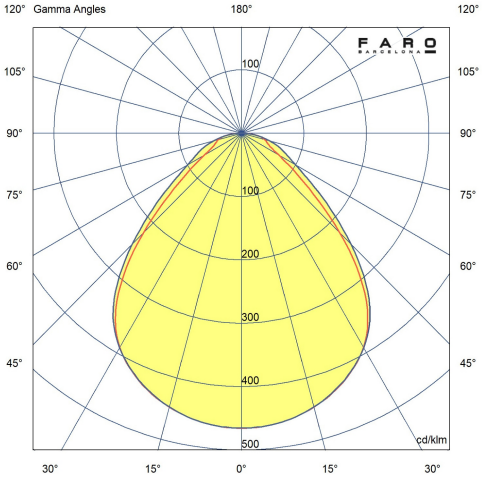



BACKLIGHT ceiling white 36W 4000K 90° DALI

Ref. 036483091d

IP20



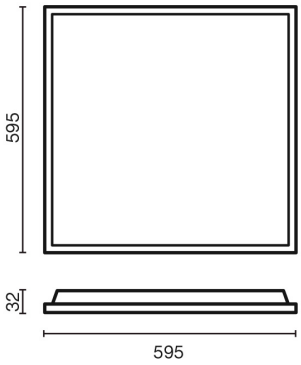

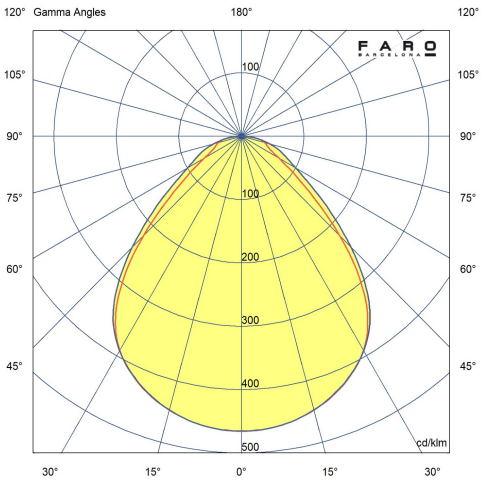

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	36
Energy class light source	D
Light source	SMD LED
Incandescent wire	650
Lifespan	50.000h L80 B10
Power factor	0.9
Luminous Flux (lm)	4499
Color temperature (K)	3000K
Opening angle degrees	90
Light orientation	Direct
Photobiological risk	2
UGR	19
CRI	80
Suitable for seaside areas	No
Control System	On/off
Supply current	900 mA
Driver regulation type	DALI
Structure material	Aluminium
Diffuser material	PVC
Diffuser finish	Opal
Maximum Ceiling Thickness (mm)	2
Includes recessed box	No
Included Accessory	NO

Installation instructions

Energy label


Photometric

BACKLIGHT ceiling white 36W 4000K 90°

Ref. 036484091

IP20



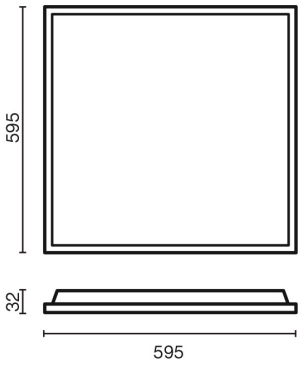

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	36
Energy class light source	D
Light source	SMD LED
Incandescent wire	650
Lifespan	50.000h L80 B10
Power factor	0.9
Luminous Flux (lm)	4499
Color temperature (K)	3000K
Opening angle degrees	90
Light orientation	Direct
Photobiological risk	2
UGR	19
CRI	80
Suitable for seaside areas	No
Control System	On/off
Supply current	900 mA
Structure material	Aluminium
Diffuser material	PVC
Diffuser finish	Opal
Maximum Ceiling Thickness (mm)	2
Includes recessed box	No
Included Accessory	NO
Installation instructions	
Energy label	
Photometric	

