FARO
BARCELONA

BEL Black wall lamp reader
Ref. 41030

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	D
Light source	HIGH POWER LED
Luminous Flux (lm)	133
Color temperature (K)	3000K
Opening angle degrees	30
Photobiological risk	1
CRI	>80
Switch type	On/Off
Structure material	Aluminium + Steel
Structure finish	Matt Black

Installation instructions

Energy label

Photometric



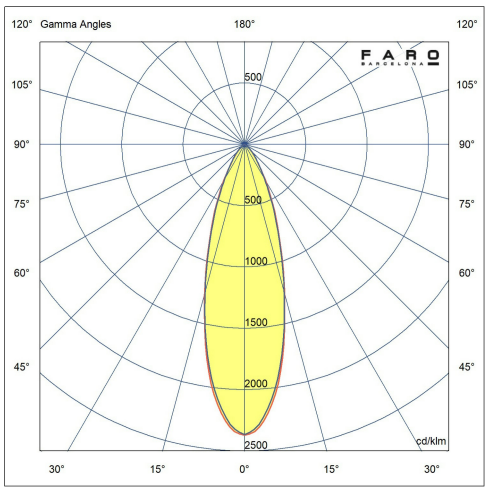

BEL White wall lamp reader
Ref. 41029

IP20



Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	D
Light source	HIGH POWER LED
Luminous Flux (lm)	133
Color temperature (K)	3000K
Opening angle degrees	30
Photobiological risk	1
CRI	>80
Switch type	On/Off
Structure material	Aluminium + Steel
Structure finish	Matt White

Installation instructions

Energy label

Photometric

