
BLIND Rust wall lamp
Ref. 70268

IK06 IP65

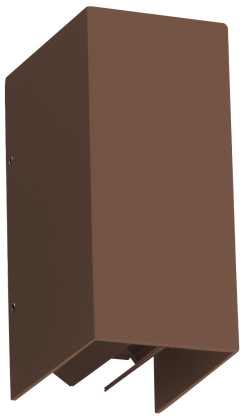



Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	06
Power (W)	2x3
Energy class light source	F
Light source	COB LED
Luminous Flux (lm)	2x90
Color temperature (K)	3000K
Light orientation	Indirect lighting
Photobiological risk	2
CRI	>80
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Rust Brown
Diffuser finish	Transparent
Other functionalities	Manually adjustable beam angle

Installation instructions

Energy label

Photometric



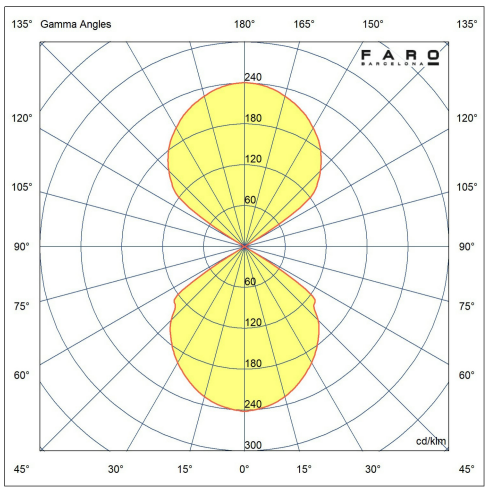


RoHS
Compliant
RECYCLE

BLIND Dark grey wall lamp
Ref. 70634

IK06 IP65





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	06
Power (W)	2x3
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	2x90
Color temperature (K)	3000K
Light orientation	Indirect lighting
CRI	>80
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Dark Grey
Diffuser finish	Transparent
Other functionalities	Manually adjustable beam angle

Installation instructions

Energy label

Photometric



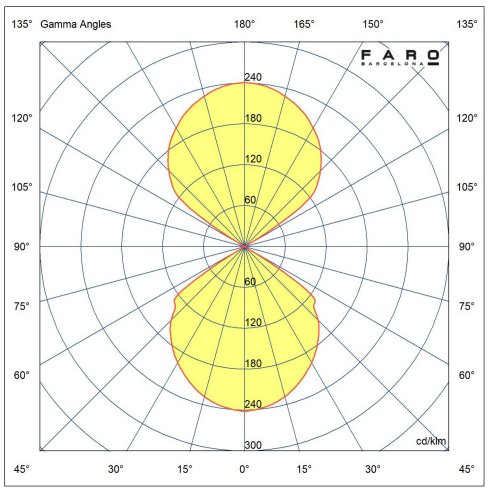

BLIND White wall lamp
Ref. 70267

IK06 IP65



Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	06
Power (W)	2x3
Energy class light source	F
Light source	COB LED
Luminous Flux (lm)	2x161
Color temperature (K)	3000K
Light orientation	Indirect lighting
CRI	>80
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Matt White
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

