BOC White wall lamp reader
Ref. 62707

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	D
Light source	HIGH POWER LED
Luminous Flux (lm)	95
Color temperature (K)	3000K
Opening angle degrees	21
Tilt angles	90
Rotation angles 2	355
CRI	>80
Switch type	On/Off
Structure material	Steel
Structure finish	Matt White

Installation instructions

Energy label

Photometric



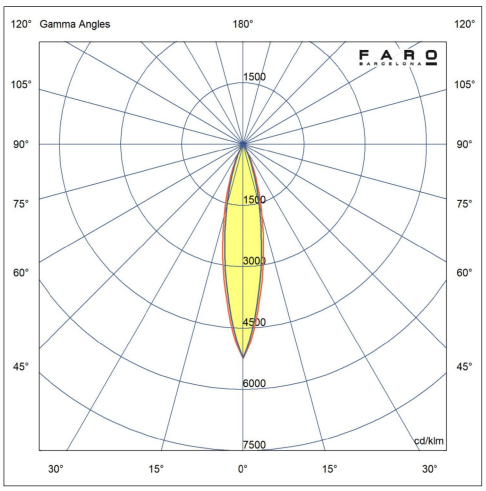

BOC Black wall lamp reader
Ref. 62708

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	D
Light source	HIGH POWER LED
Luminous Flux (lm)	95
Color temperature (K)	3000K
Opening angle degrees	21
Tilt angles	90
Rotation angles 2	355
CRI	>80
Switch type	On/Off
Structure material	Steel
Structure finish	Matt Black

Installation instructions

Energy label

Photometric



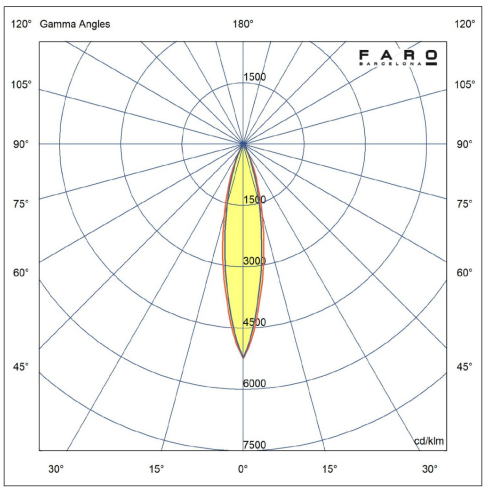

BOC Chrome wall lamp reader
Ref. 62710

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	D
Light source	HIGH POWER LED
Luminous Flux (lm)	95
Color temperature (K)	3000K
Opening angle degrees	21
Tilt angles	90
Rotation angles 2	355
CRI	>80
Switch type	On/Off
Structure material	Aluminium + Steel
Structure finish	Chrome

Installation instructions

Energy label

Photometric



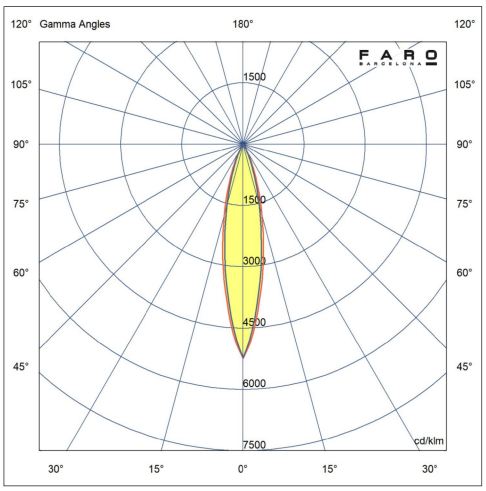

BOC Bronze wall lamp reader
Ref. 62711

IP20



Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	D
Light source	HIGH POWER LED
Luminous Flux (lm)	95
Color temperature (K)	3000K
Opening angle degrees	21
Tilt angles	90
Rotation angles 2	355
CRI	>80
Switch type	On/Off
Structure material	Aluminium + Steel
Structure finish	Bronze

Installation instructions

Energy label

Photometric

