
CERLER 350 Dark grey beacon lamp
Ref. 71940

IK07 IP65






Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	9
Energy class light source	F
Light source	SMD LED
Lifespan	30.000h L70 B10
Power factor	0.57
Luminous Flux (lm)	427
Color temperature (K)	2200/ 2700/ 3200/ 4000K
Light orientation	Direct
Photobiological risk	1
CRI	≥80
Suitable for seaside areas	No
Control System	On/off
Supply current	120 mA
Switch type	Push
Structure material	Aluminium
Diffuser material	PC
Structure finish	Dark Grey
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

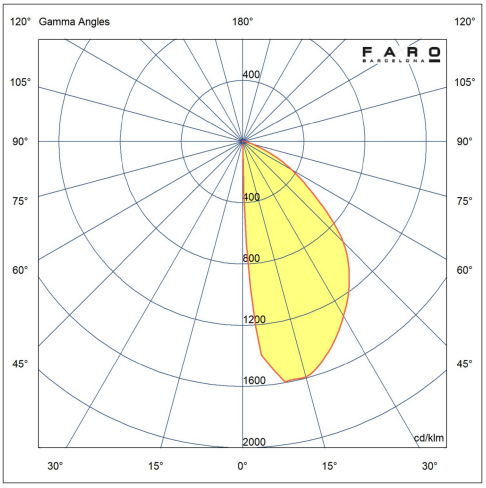



CERLER 350 Rust beacon lamp
Ref. 71941

IK07 IP65



Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	9
Energy class light source	F
Light source	SMD LED
Lifespan	30.000h L70 B10
Power factor	0.57
Luminous Flux (lm)	427
Color temperature (K)	2200/ 2700/ 3200/ 4000K
Light orientation	Direct
Photobiological risk	1
CRI	≥80
Suitable for seaside areas	No
Control System	On/off
Supply current	120 mA
Switch type	Push
Structure material	Aluminium
Diffuser material	PC
Structure finish	Rust Brown
Diffuser finish	Transparent
Installation instructions	
Energy label	
Photometric	



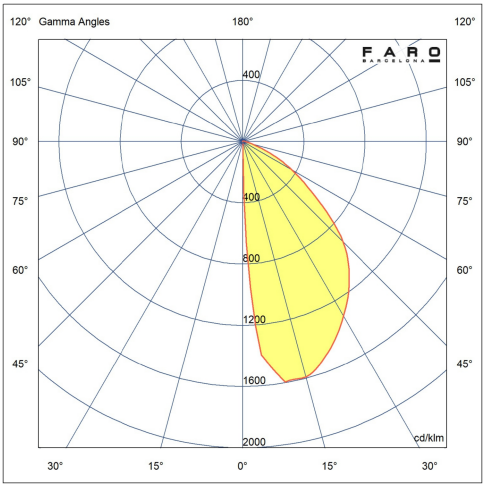

FARO
BARCELONA

CERLER 350 Rust beacon lamp
Ref. 71941





CERLER 600 Dark grey beacon lamp
Ref. 71942

IK07 IP65



Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	9
Energy class light source	F
Light source	SMD LED
Lifespan	30.000h L70 B10
Power factor	0.57
Luminous Flux (lm)	427
Color temperature (K)	2200/ 2700/ 3200/ 4000K
Light orientation	Direct
Photobiological risk	1
CRI	≥80
Suitable for seaside areas	No
Control System	On/off
Supply current	120 mA
Switch type	Push
Structure material	Aluminium
Diffuser material	PC
Structure finish	Dark Grey
Diffuser finish	Transparent
Installation instructions	
Energy label	
Photometric	



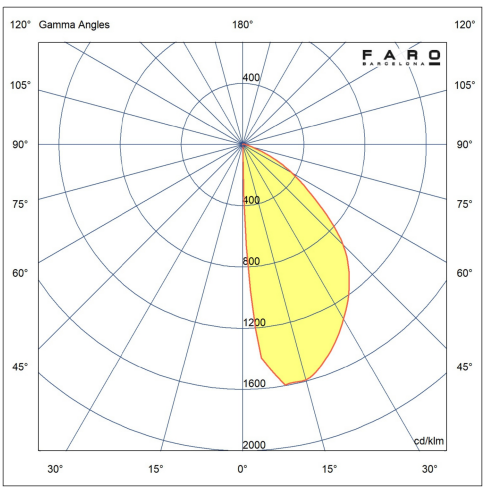

FARO
BARCELONA

CERLER 600 Dark grey beacon lamp
Ref. 71942



CERLER 600 Rust beacon lamp
Ref. 71943

IK07 IP65



Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	9
Energy class light source	F
Light source	SMD LED
Lifespan	30.000h L70 B10
Power factor	0.57
Luminous Flux (lm)	427
Color temperature (K)	2200/ 2700/ 3200/ 4000K
Light orientation	Direct
Photobiological risk	1
CRI	≥80
Suitable for seaside areas	No
Control System	On/off
Supply current	120 mA
Switch type	Push
Structure material	Aluminium
Diffuser material	PC
Structure finish	Rust Brown
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

