
CONGA 3L White pendant lamp 500
Ref. 64314-54-3I |FARO LAB

IP20



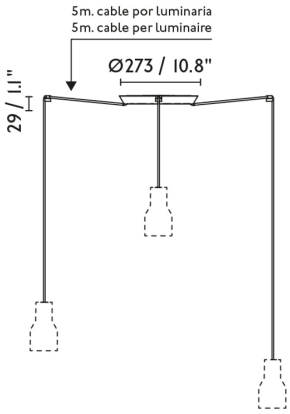

Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	G95
Number of lamp holders	3
Light orientation	Direct
Cable length	5000 mm
Structure material	Steel
Shade material	Textile
Diffuser material	Papyrus
Structure finish	Matt Black
Shade finish	White
Diffuser finish	White

Installation instructions

CONGA 3L White pendant lamp 500
Ref. 64314-54-3I |FARO LAB

Recommended bulbs



Bulb G95 MAT LED E27 8W 2700K 800Lm

Reference	17464
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360


CONGA 3L Beige pendant lamp 500
Ref. 64314-55-3I |FARO LAB

IP20



Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	G95
Number of lamp holders	3
Light orientation	Direct
Cable length	5000 mm
Structure material	Steel
Shade material	Textile
Diffuser material	Papyrus
Structure finish	Matt Black
Shade finish	Beige
Diffuser finish	White

Installation instructions

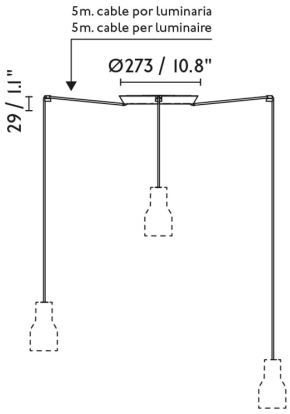

CONGA 3L Beige pendant lamp 500
Ref. 64314-55-3I |FARO LAB

Recommended bulbs



Bulb G95 MAT LED E27 8W 2700K 800Lm

Reference	17464
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360

CONGA 3L Black pendant lamp 500


Ref. 64314-56-3l |FARO LAB

IP20



Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	G95
Number of lamp holders	3
Light orientation	Direct
Cable length	5000 mm
Structure material	Steel
Shade material	Textile
Diffuser material	Papyrus
Structure finish	Matt Black
Shade finish	Black
Diffuser finish	White

Installation instructions

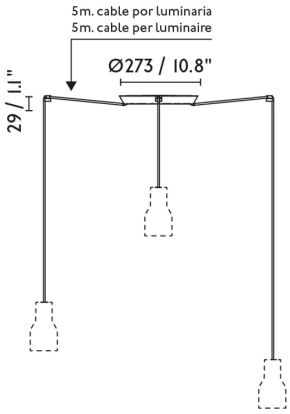

CONGA 3L Black pendant lamp 500
Ref. 64314-56-3I |FARO LAB

Recommended bulbs



Bulb G95 MAT LED E27 8W 2700K 800Lm

Reference	17464
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360


CONGA 5L White pendant lamp 500
Ref. 64314-54-5l |FARO LAB

IP20



Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	G95
Number of lamp holders	5
Light orientation	Direct
Cable length	5000 mm
Structure material	Steel
Shade material	Textile
Diffuser material	Papyrus
Structure finish	Matt Black
Shade finish	White
Diffuser finish	White

Installation instructions

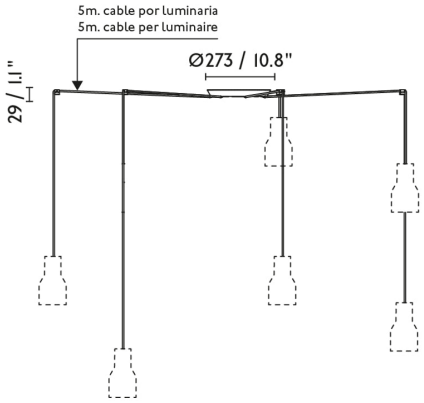

CONGA 5L White pendant lamp 500
Ref. 64314-54-5l |FARO LAB

Recommended bulbs



Bulb G95 MAT LED E27 8W 2700K 800Lm

Reference	17464
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360


CONGA 5L Beige pendant lamp 500
Ref. 64314-55-5l |FARO LAB

IP20



Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	G95
Number of lamp holders	5
Light orientation	Direct
Cable length	5000 mm
Structure material	Steel
Shade material	Textile
Diffuser material	Papyrus
Structure finish	Matt Black
Shade finish	Beige
Diffuser finish	White

Installation instructions

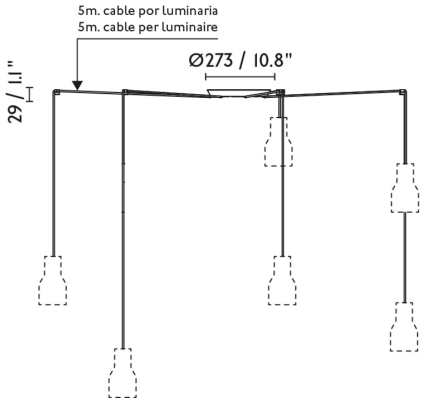

CONGA 5L Beige pendant lamp 500
Ref. 64314-55-5l |FARO LAB

Recommended bulbs



Bulb G95 MAT LED E27 8W 2700K 800Lm

Reference	17464
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360

CONGA 5L Black pendant lamp 500


Ref. 64314-56-5l |FARO LAB

IP20



Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	G95
Number of lamp holders	5
Light orientation	Direct
Cable length	5000 mm
Structure material	Steel
Shade material	Textile
Diffuser material	Papyrus
Structure finish	Matt Black
Shade finish	Black
Diffuser finish	White

Installation instructions

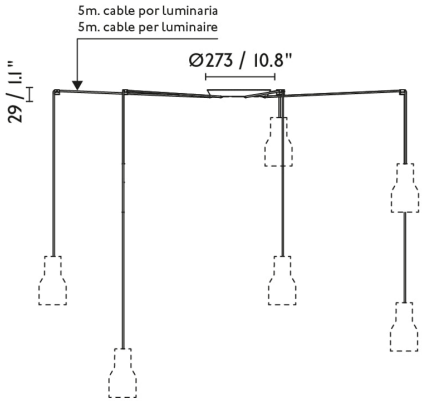

Recommended bulbs



Bulb G95 MAT LED E27 8W 2700K 800Lm

Reference	17464
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360

CONGA 7L White pendant lamp 500


Ref. 64314-54-7I |FARO LAB

IP20



Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	G95
Number of lamp holders	7
Light orientation	Direct
Cable length	5000 mm
Structure material	Steel
Shade material	Textile
Diffuser material	Papyrus
Structure finish	Matt Black
Shade finish	White
Diffuser finish	White

Installation instructions

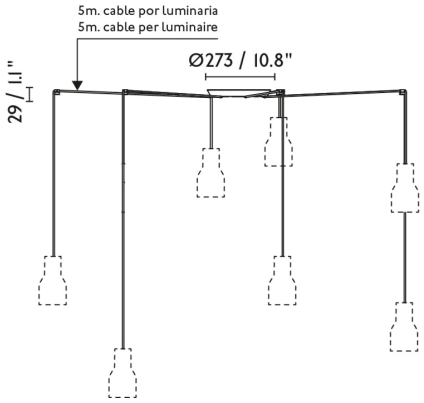

Recommended bulbs



Bulb G95 MAT LED E27 8W 2700K 800Lm

Reference	17464
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360


CONGA 7L Beige pendant lamp 500
Ref. 64314-55-7I |FARO LAB

IP20



Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	G95
Number of lamp holders	7
Light orientation	Direct
Cable length	5000 mm
Structure material	Steel
Shade material	Textile
Diffuser material	Papyrus
Structure finish	Matt Black
Shade finish	Beige
Diffuser finish	White

Installation instructions

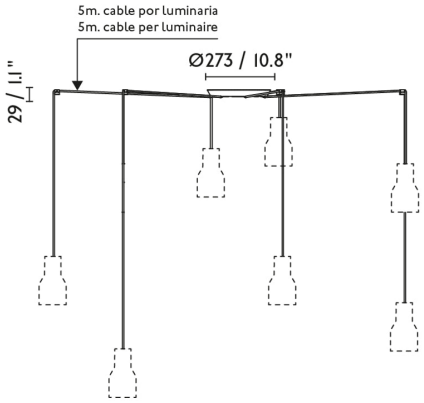

CONGA 7L Beige pendant lamp 500
Ref. 64314-55-7l |FARO LAB

Recommended bulbs



Bulb G95 MAT LED E27 8W 2700K 800Lm

Reference	17464
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360

CONGA 7L Black pendant lamp 500


Ref. 64314-56-7I |FARO LAB

IP20



Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	G95
Number of lamp holders	7
Light orientation	Direct
Cable length	5000 mm
Structure material	Steel
Shade material	Textile
Diffuser material	Papyrus
Structure finish	Matt Black
Shade finish	Black
Diffuser finish	White

Installation instructions

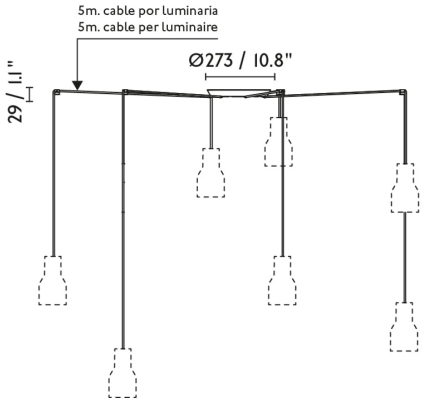

Recommended bulbs



Bulb G95 MAT LED E27 8W 2700K 800Lm

Reference	17464
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360