
CONGA Black/white pendant simple lamp 500

Ref. 64315-54 |FARO LAB

IP20





Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	G95
Number of lamp holders	1
Light orientation	Direct
Cable length	1500 mm
Structure material	Steel
Shade material	Textile
Diffuser material	Papyrus
Structure finish	Matt Black
Shade finish	White
Diffuser finish	White

Installation instructions

CONGA Black/white pendant simple lamp 500
Ref. 64315-54 |FARO LAB

Recommended bulbs



Bulb G95 MAT LED E27 8W 2700K 800Lm

Reference	17464
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360

Related accessories



KIT track adapter / connector for suspension white

Reference	01997001
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	PC

CONGA Black/white pendant simple lamp 500

Ref. 64315-54 |FARO LAB



KIT track adapter /connector for suspension black


Reference	01997002
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	PC

CONGA Black/beige pendant simple lamp 500

Ref. 64315-55 |FARO LAB

IP20



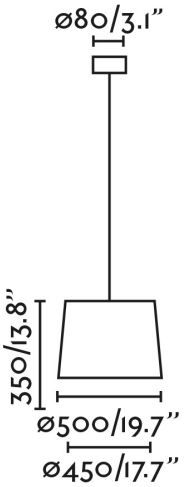

Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	G95
Number of lamp holders	1
Light orientation	Direct
Cable length	1500 mm
Structure material	Steel
Shade material	Textile
Diffuser material	Papyrus
Structure finish	Matt Black
Shade finish	Beige
Diffuser finish	White

Installation instructions

CONGA Black/beige pendant simple lamp 500
Ref. 64315-55 |FARO LAB

Recommended bulbs



Bulb G95 MAT LED E27 8W 2700K 800Lm

Reference	17464
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360

Related accessories



KIT track adapter / connector for suspension white

Reference	01997001
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	PC

CONGA Black/beige pendant simple lamp 500

Ref. 64315-55 |FARO LAB



KIT track adapter /connector for suspension black


Reference	01997002
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	PC

CONGA Black/black pendant simple lamp 500

Ref. 64315-56 |FARO LAB

IP20



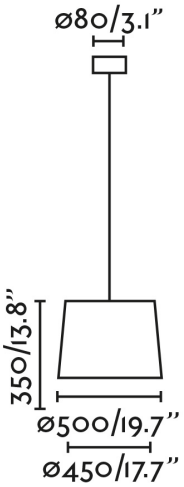

Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	G95
Number of lamp holders	1
Light orientation	Direct
Cable length	1500 mm
Structure material	Steel
Shade material	Textile
Diffuser material	Papyrus
Structure finish	Matt Black
Shade finish	Black
Diffuser finish	White

Installation instructions

CONGA Black/black pendant simple lamp 500
Ref. 64315-56 |FARO LAB

Recommended bulbs



Bulb G95 MAT LED E27 8W 2700K 800Lm

Reference	17464
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360

Related accessories



KIT track adapter / connector for suspension white

Reference	01997001
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	PC

CONGA Black/black pendant simple lamp 500

Ref. 64315-56 |FARO LAB



KIT track adapter /connector for suspension black

Reference	01997002
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	PC

CONGA Black/black pendant simple lamp 500
Ref. 64315-56 |FARO LAB

