CRONOS White wall lamp reader

Ref. 62750 |FARO LAB

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	4
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	394
Color temperature (K)	2700K
Opening angle degrees	34
Tilt angles	90
Rotation angles 2	355
CRI	90
Supply current	350 mA
Switch type	On/Off
Structure material	Steel + Aluminium
Structure finish	Matt White+Textured Black

Installation instructions

Energy label

Photometric



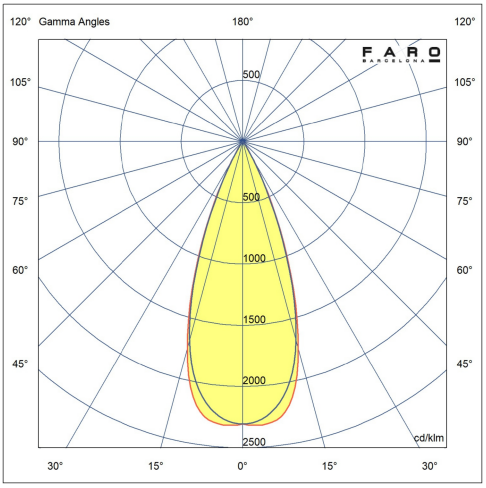

CRONOS Black wall lamp reader

Ref. 62751 |FARO LAB

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	4
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	394
Color temperature (K)	2700K
Opening angle degrees	34
Tilt angles	90
Rotation angles 2	355
CRI	90
Supply current	350 mA
Switch type	On/Off
Structure material	Steel + Aluminium
Structure finish	Matt Black+Textured Black

Installation instructions

Energy label

Photometric



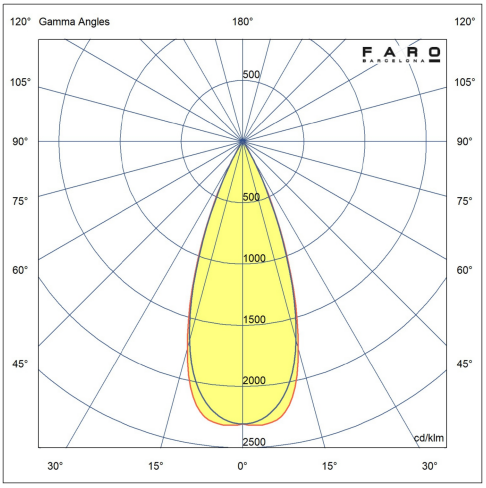

CRONOS Black wall lamp reader
Ref. 62751 |FARO LAB



CRONOS Bronze wall lamp reader

Ref. 62752 |FARO LAB

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	4
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	394
Color temperature (K)	2700K
Opening angle degrees	34
Tilt angles	90
Rotation angles 2	355
CRI	90
Supply current	350 mA
Switch type	On/Off
Structure material	Steel + Aluminium
Structure finish	Bronze+Textured Black

Installation instructions

Energy label

Photometric



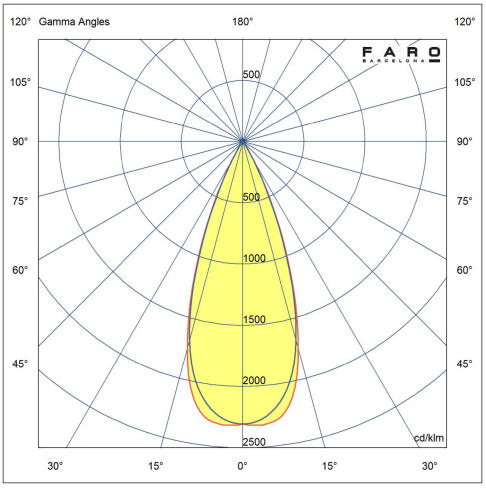


CRONOS Brushed aluminium wall lamp reader

Ref. 62765 |FARO LAB

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	4
Energy class light source	F
Light source	HIGH POWER LED
Lifespan	15.000h
Luminous Flux (lm)	394
Color temperature (K)	2700K
Opening angle degrees	36
Light orientation	Direct
Tilt angles	90
Rotation angles 2	355
Photobiological risk	1
CRI	90
Supply current	350 mA
Switch type	On/Off
Structure material	Steel + Aluminium
Diffuser material	PMMA
Structure finish	Brushed Aluminium+Textured Black
RAL/Pantone structure	NA
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

