DANG Inox downlight
Ref. 70446

IP67





Mounting	Wall
Voltage (V)	24VDC
Class	III
IP	67
Power (W)	3
Energy class light source	G
Light source	COB LED
Luminous Flux (lm)	48
Color temperature (K)	3000K
Opening angle degrees	40
CRI	>80
Suitable for seaside areas	Yes
Recommended driver On/Off	98324031
Luminaires per On/Off driver	De 1 a 10
Recommended DALI driver	98324101
Luminaires per DALI driver	De 1 a 25
Recommended CASAMBI driver	98324599
Luminaires per CASAMBI driver	De 1 a 30
Structure material	Stainless Steel 316L + Glass
Diffuser material	Glass
Structure finish	Satin Stainless
Diffuser finish	Transparent
Cut-out Size for Recommended Mount	ø63x115
Includes recessed box	Yes

Installation instructions

Energy label

Photometric

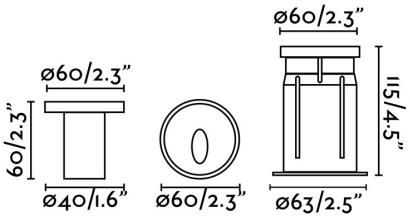

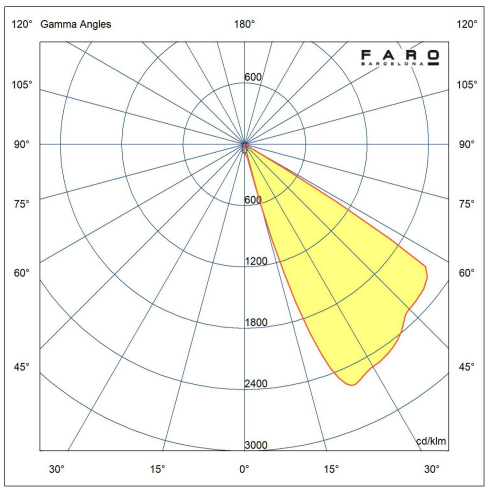

Recommended Drivers



SOURCE D´ALIMENTACION 24VDC 30W IP67

Reference	98324031
Voltage (V)	220V-240V
IP	67
Power (W)	30
Control System	on/off



24Vdc 100W IP67 DALI power supply

Reference	98324101
Voltage (V)	220V-240V
Power (W)	100W
Control System	Dali



POWER SUPPLY 24VDC 120W 5A Casambi

Reference	98324599
Voltage (V)	24VDC
IP	20
Power (W)	120
Control System	Casambi

FARO
BARCELONA

DANG Inox downlight
Ref. 70446

