

FLIN Black reader wall lamp
Ref. 64319

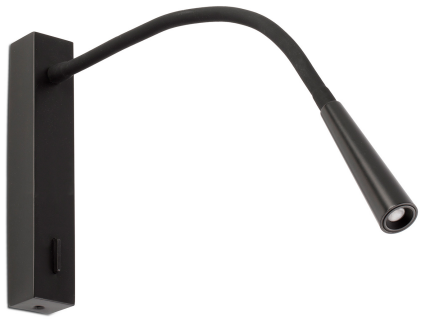




Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	3
Energy class light source	F
Light source	HIGH POWER LED
Lifespan	30.000h L70 B50
Power factor	0.43
Luminous Flux (lm)	153
Color temperature (K)	3000K
Opening angle degrees	45
Light orientation	Direct
Rotation angles 2	355
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	700 mA
Switch type	On/Off
Structure material	Steel + Aluminium
Diffuser material	PC
Structure finish	Matt Black
Diffuser finish	Translucent

Installation instructions

Energy label

Photometric

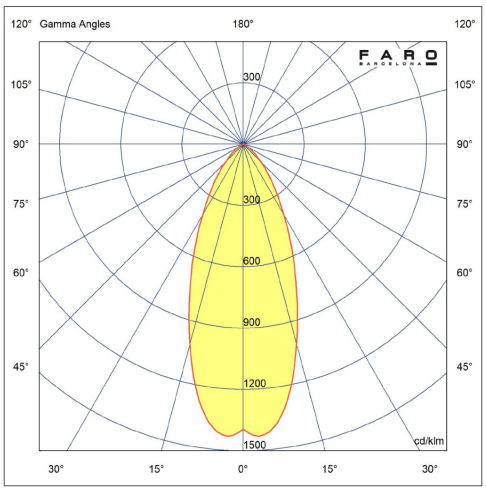

FLIN Black reader wall lamp
Ref. 64319

FLIN White reader wall lamp
Ref. 64318

IP20





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	3
Energy class light source	F
Light source	HIGH POWER LED
Lifespan	30.000h L70 B50
Power factor	0.43
Luminous Flux (lm)	153
Color temperature (K)	3000K
Opening angle degrees	45
Light orientation	Direct
Rotation angles 2	355
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	700 mA
Switch type	On/Off
Structure material	Steel + Aluminium
Diffuser material	PC
Structure finish	Matt White
Diffuser finish	Translucent

Installation instructions

Energy label

Photometric



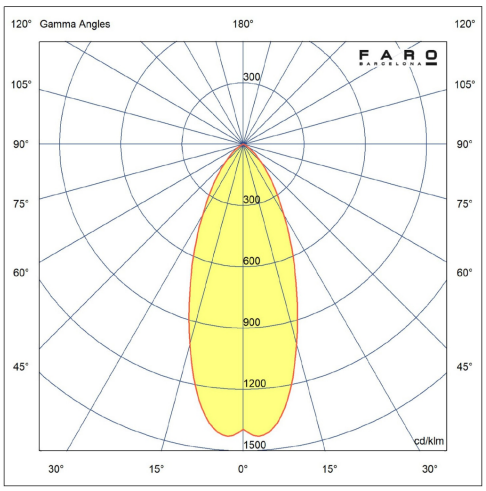

FLIN White reader wall lamp
Ref. 64318