# FOC 210 Dark grey projector with spike
Ref. 70158

IP65





| | |
|---|---|
| Mounting | Floor |
| Voltage (V) | 220V-240V |
| Hertz | 50Hz |
| Class | I |
| IP | 65 |
| Power (W) | 16 |
| Energy class light source | F |
| Light source | COB LED |
| Luminous Flux (lm) | 800 |
| Color temperature (K) | 3000K |
| Opening angle degrees | 36 |
| Tilt angles | 135 |
| CRI | >80 |
| Cable length | 500 mm |
| Structure material | Aluminium |
| Diffuser material | Glass |
| Structure finish | Dark Grey |
| Diffuser finish | Transparent |

Installation instructions

Energy label

Photometric



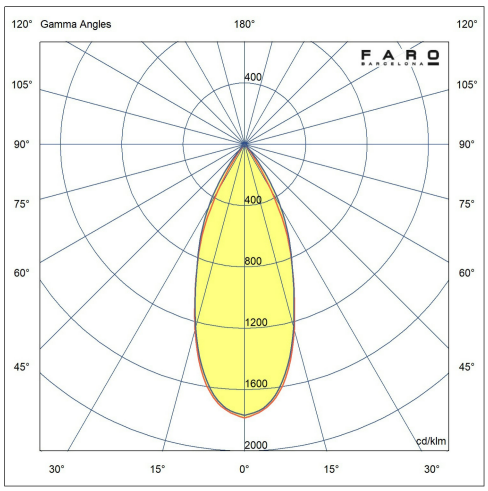FARO
BARCELONA

**FOC 210 Dark grey projector with spike**
Ref. 70158



# FOC 520 Dark grey projector with spike
Ref. 70159





| | |
|---|---|
| Mounting | Floor |
| Voltage (V) | 220V-240V |
| Hertz | 50Hz |
| Class | I |
| IP | 65 |
| Power (W) | 16 |
| Energy class light source | F |
| Light source | COB LED |
| Luminous Flux (lm) | 800 |
| Color temperature (K) | 3000K |
| Opening angle degrees | 36 |
| Tilt angles | 135 |
| CRI | >80 |
| Cable length | 500 mm |
| Structure material | Aluminium |
| Diffuser material | Glass |
| Structure finish | Dark Grey |
| Diffuser finish | Transparent |

Installation instructions

Energy label

Photometric



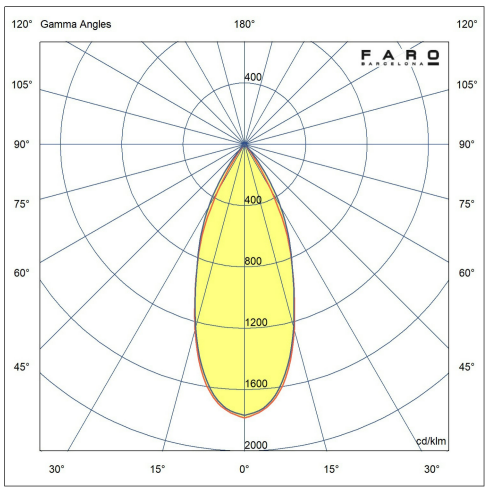FARO
BARCELONA

**FOC 520 Dark grey projector with spike**
Ref. 70159

