# FRED 200 Dark grey wall lamp
Ref. 70663

IK10 IP65





| | |
|---|---|
| Mounting | Wall, Ceiling |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 65 |
| IK | 10 |
| Power (W) | 7 |
| Energy class light source | G |
| Light source | SMD LED |
| Luminous Flux (lm) | 546 |
| Color temperature (K) | 3000K |
| CRI | >80 |
| Suitable for seaside areas | Yes |
| Structure material | ABS |
| Diffuser material | PC |
| Structure finish | Dark Grey |
| Diffuser finish | Opal |

Installation instructions

Energy label

Photometric



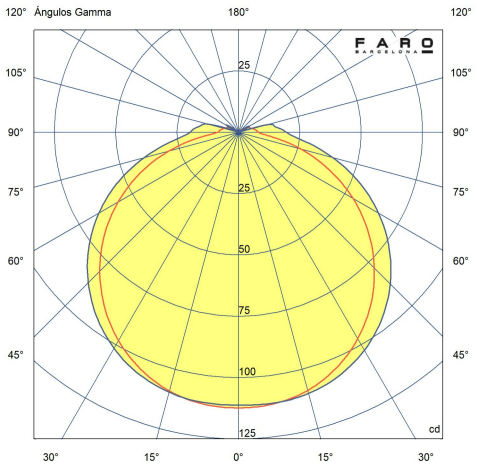FARO
BARCELONA

**FRED 200 Dark grey wall lamp**
Ref. 70663



# FRED 200 White wall lamp
Ref. 70664

IK10 IP65





| | |
|---|---|
| Mounting | Wall, Ceiling |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 65 |
| IK | 10 |
| Power (W) | 7 |
| Energy class light source | G |
| Light source | SMD LED |
| Luminous Flux (lm) | 546 |
| Color temperature (K) | 3000K |
| CRI | >80 |
| Suitable for seaside areas | Yes |
| Structure material | ABS |
| Diffuser material | PC |
| Structure finish | Matt White |
| Diffuser finish | Opal |

Installation instructions

Energy label

Photometric



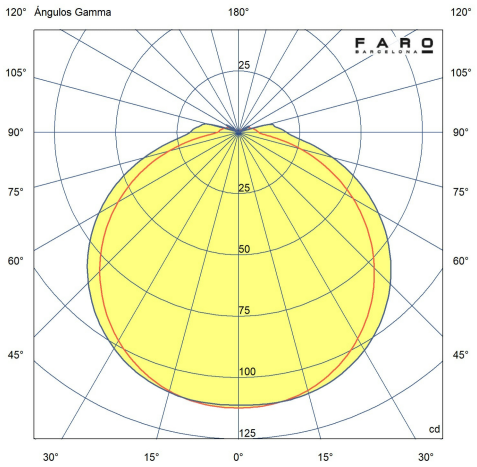**FRED 200 White wall lamp**
Ref. 70664

# FRED 245 White wall lamp
Ref. 70668

IK10 IP65





| | |
|---|---|
| Mounting | Wall, Ceiling |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 65 |
| IK | 10 |
| Power (W) | 11 |
| Energy class light source | G |
| Light source | SMD LED |
| Luminous Flux (lm) | 873 |
| Color temperature (K) | 3000K |
| CRI | >80 |
| Suitable for seaside areas | Yes |
| Structure material | ABS |
| Diffuser material | PC |
| Structure finish | Matt White |
| Diffuser finish | Opal |

Installation instructions

Energy label

Photometric



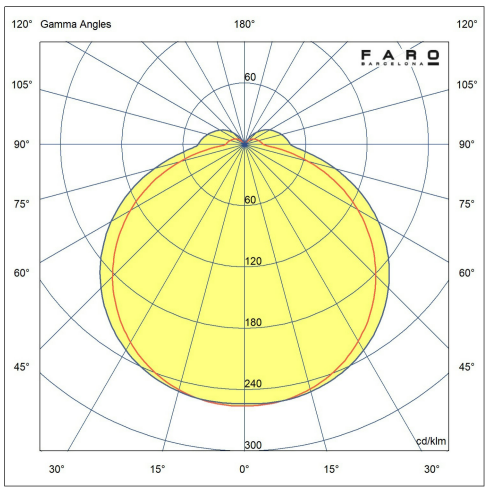**FRED 245 White wall lamp**
Ref. 70668

# FRED 245 Applique gris foncé
Ref. 70667

IK10 IP65



| | |
|---|---|
| Fixation | Mur, Plafond |
| Tension (V) | 220V-240V |
| Hertz | 50/60Hz |
| Classe | II |
| IP | 65 |
| IK | 10 |
| Puissance (W) | 11 |
| Classe énergétique source lumineuse | G |
| Source lumineuse | SMD LED |
| Flux lumineux (lm) | 873 |
| Température de couleur (K) | 3000K |
| IRC | >80 |
| Adapté pour les zones côtières | Oui |
| Matériau de la structure | ABS |
| Matériau du diffuseur | PC |
| Finition de la structure | Gris Foncé |
| Finition du diffuseur | Opal |

Instructions d'installation

Étiquette énergétique

Photométrique

