
GLINT 157 Grey beacon lamp 2700K


Ref. 75636 |FARO LAB

IK06 IP55






Mounting	Floor, Post, Wall
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	55
IK	06
Power (W)	6,5
Energy class light source	E
Light source	SMD LED
Power factor	0.9
Luminous Flux (lm)	68
Color temperature (K)	2700K
Light orientation	Direct
Photobiological risk	2
CRI	≥80
Suitable for seaside areas	Yes
Control System	On/off
Supply current	200 mA
Structure material	Concrete
Diffuser material	Glass
Structure finish	Grey
Diffuser finish	Sand
Included Accessory	KIT DE FIJACION
Other functionalities	Includes IP68 connector
Installation instructions	
Energy label	
Photometric	

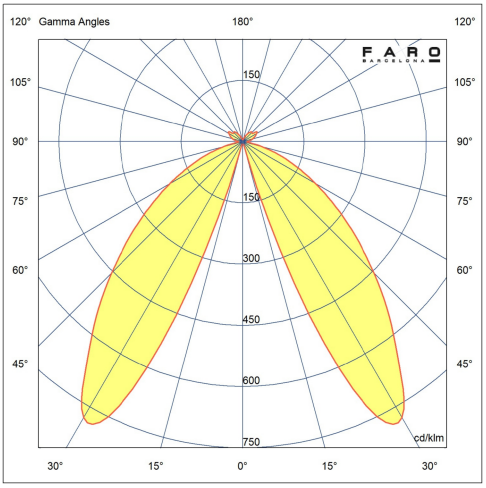

GLINT 157 Grey beacon lamp 2700K
Ref. 75636 |FARO LAB

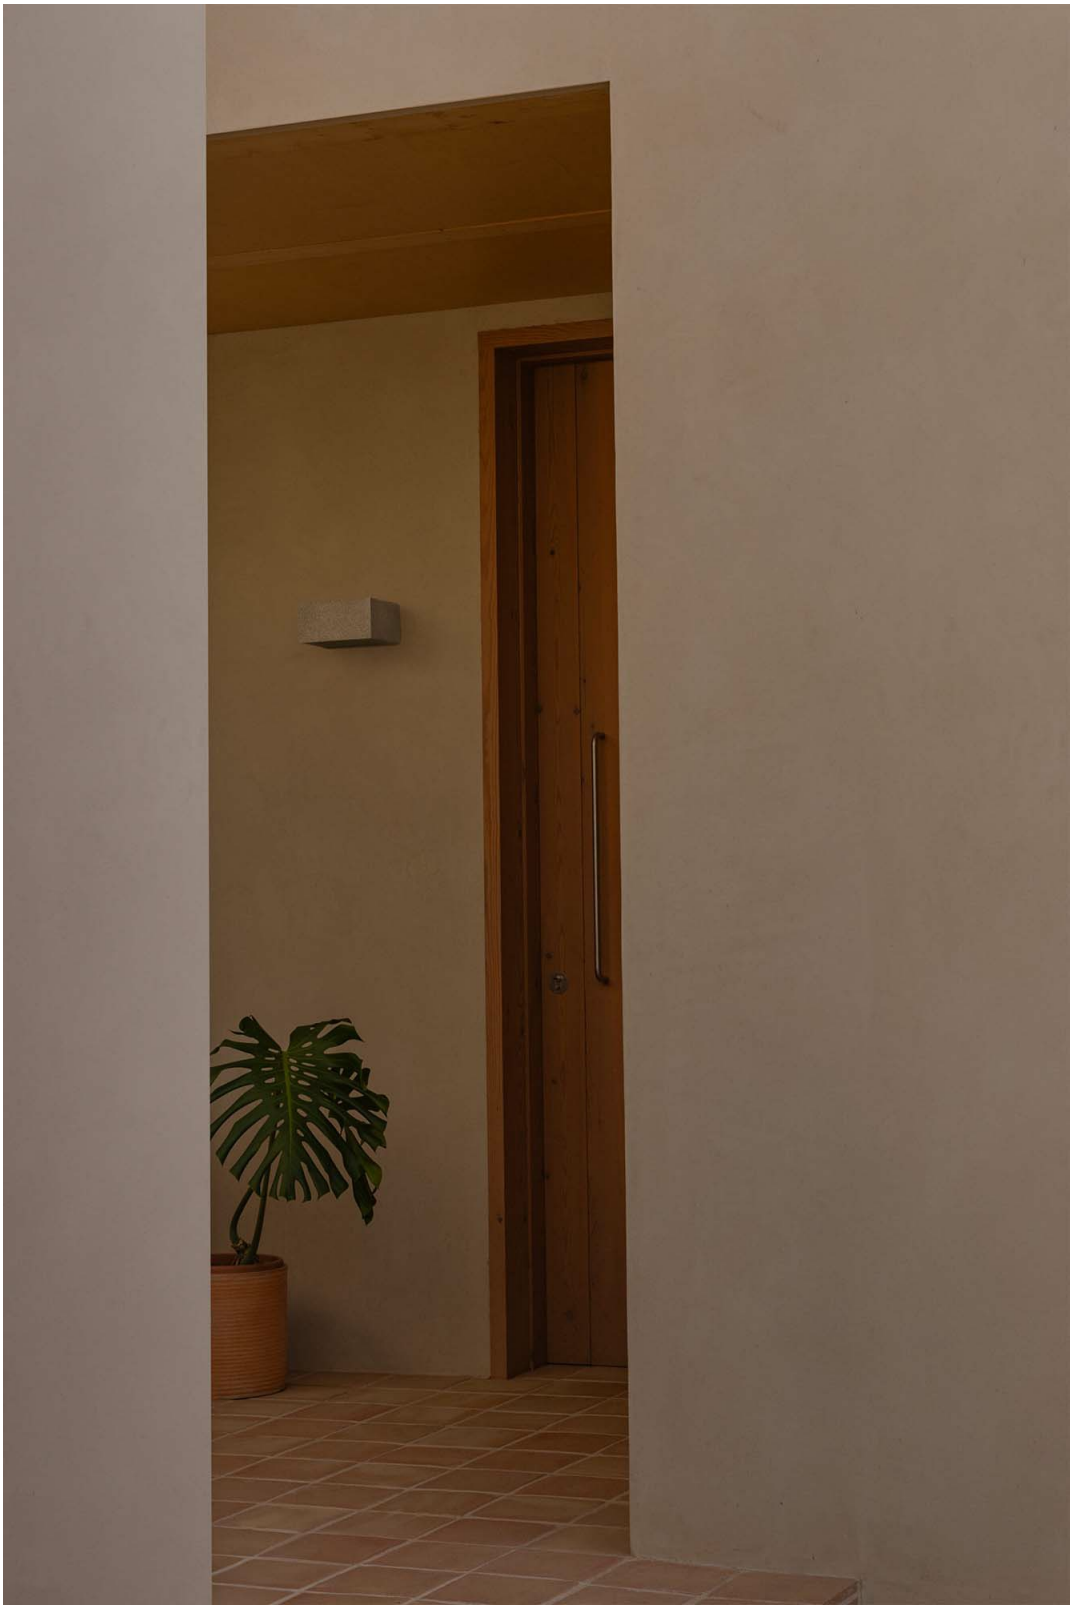


GLINT 157 Grey beacon lamp 3000K


Ref. 75639 |FARO LAB

IK06 IP55





Mounting	Floor, Post, Wall
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	55
IK	06
Power (W)	6,5
Energy class light source	E
Light source	SMD LED
Power factor	0.9
Luminous Flux (lm)	97
Color temperature (K)	3000K
Light orientation	Direct
Photobiological risk	2
CRI	≥80
Suitable for seaside areas	Yes
Control System	On/off
Supply current	200 mA
Structure material	Concrete
Diffuser material	Glass
Structure finish	Grey
Diffuser finish	Sand
Included Accessory	KIT DE FIJACION
Other functionalities	Includes IP68 connector
Installation instructions	
Energy label	
Photometric	

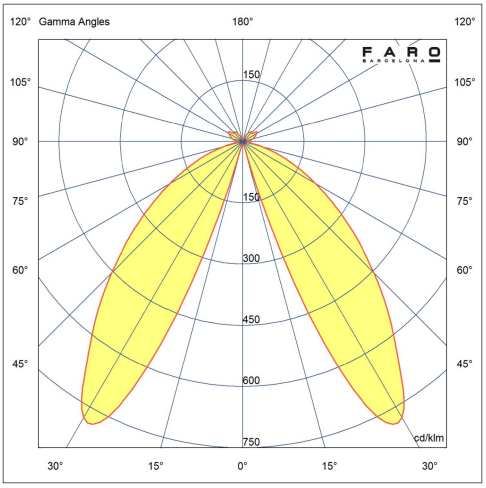

GLINT 157 Grey beacon lamp 3000K
Ref. 75639 |FARO LAB

