ICE L LED SPEAKER White/maple fan speaker 3000K

Ref. 33460 |ESTUDI RIBAUDI





Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50Hz
Class	I
IP	20
Power (W)	15
Energy class light source	E
Light source	SMD LED
Lifespan	25.000h
Luminous Flux (lm)	543
Color temperature (K)	3000K
Opening angle degrees	120
Light orientation	Direct
CRI	>80
Structure material	Steel
Diffuser material	Glass
Blade material (fan blades)	MDF
Structure finish	White
Diffuser finish	Opal
Blade finish	White
Blade finish 2	Maple
Other functionalities	Bluetooth connection
Motor type	AC
Fan power (W)	13-25-55
RPM	75-135-180
Airflow (m³/min)	157
Airflow (CFM)	5544
Sound intensity (dBA)	37-39-47
Number of blades	3
Maximum tilt (º)	15
Type of control included	Remote control
Rod diameter	21
Optional rod model	No dispone

Installation instructions

Energy label

Photometric

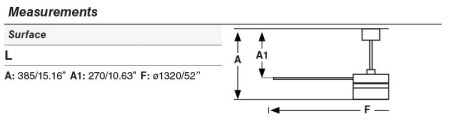

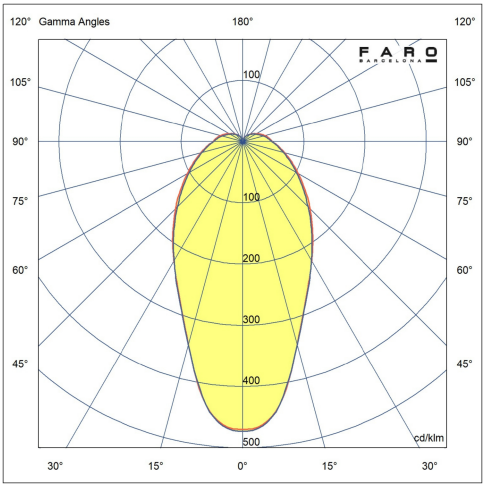

ICE L LED SPEAKER White/maple fan speaker 3000K
Ref. 33460 |ESTUDI RIBAUDI

