LOTUS 350 Dark grey beacon lamp
Ref. 71224 |ESTUDI RIBAUDI

IK08 IP65





Mounting	Floor
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	08
Power (W)	18
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	1120
Color temperature (K)	3000K
Light orientation	Indirect lighting
CRI	>80
Structure material	Aluminium
Diffuser material	PC
Structure finish	Dark Grey
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



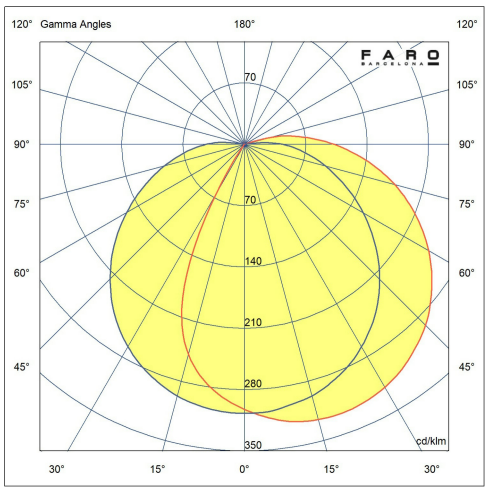

LOTUS 350 Dark grey beacon lamp
Ref. 71224 |ESTUDI RIBAUDI



LOTUS 650 Dark grey beacon lamp
Ref. 71225 |ESTUDI RIBAUDI

IK08 IP65





Mounting	Floor
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	08
Power (W)	18
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	1120
Color temperature (K)	3000K
Light orientation	Indirect lighting
CRI	>80
Structure material	Aluminium
Diffuser material	PC
Structure finish	Dark Grey
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



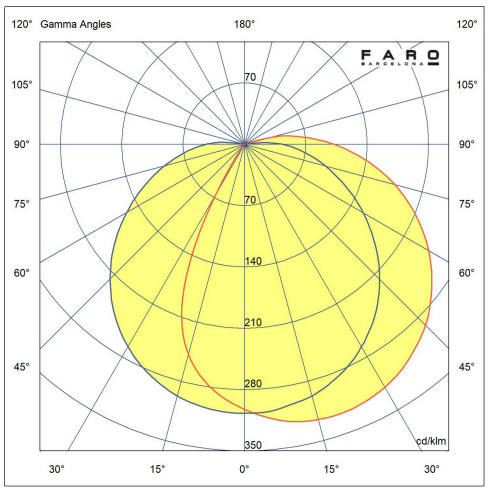

FARO
BARCELONA

LOTUS 650 Dark grey beacon lamp
Ref. 71225 |ESTUDI RIBAUDI

