PAM 165 Black and gold pendant lamp
Ref. 64160

IP20





Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	11
Energy class light source	D
Light source	SMD LED
Luminous Flux (lm)	1050
Color temperature (K)	3000K
Opening angle degrees	120
CRI	>80
Cable length	1500 mm
Structure material	Steel
Diffuser material	PMMA
Structure finish	Matt Black+Matt Gold
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



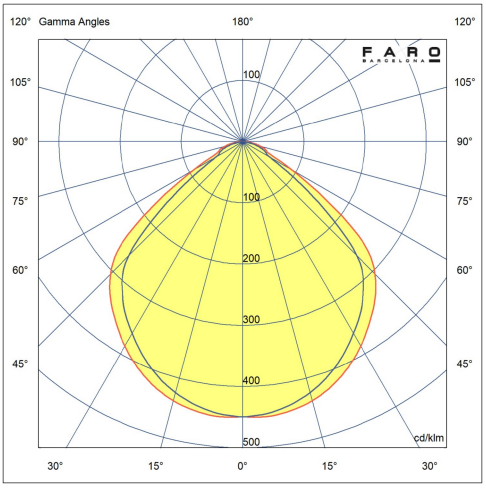

FARO
BARCELONA

PAM 165 Black and gold pendant lamp
Ref. 64160



PAM 250 Black and gold pendant lamp
Ref. 64162

IP20





Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	24
Energy class light source	D
Light source	SMD LED
Luminous Flux (lm)	1968
Color temperature (K)	3000K
Opening angle degrees	120
CRI	>80
Cable length	1500 mm
Structure material	Steel
Diffuser material	PMMA
Structure finish	Matt Black+Matt Gold
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



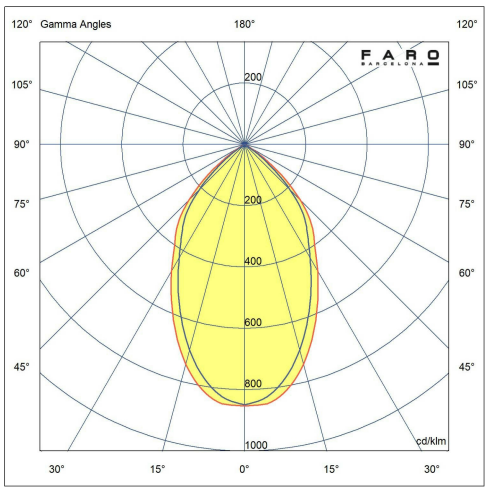

FARO
BARCELONA

PAM 250 Black and gold pendant lamp
Ref. 64162

