PILO 350 Grey beacon lamp 2700K
Ref. 75595

IK06 IP65





Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	65
IK	06
Power (W)	6
Energy class light source	E
Light source	SMD LED
Power factor	0.9
Luminous Flux (lm)	242
Color temperature (K)	2700K
CRI	≥80
Suitable for seaside areas	Yes
Supply current	200 mA
Structure material	Concrete
Structure finish	Grey

Installation instructions

Energy label

Photometric



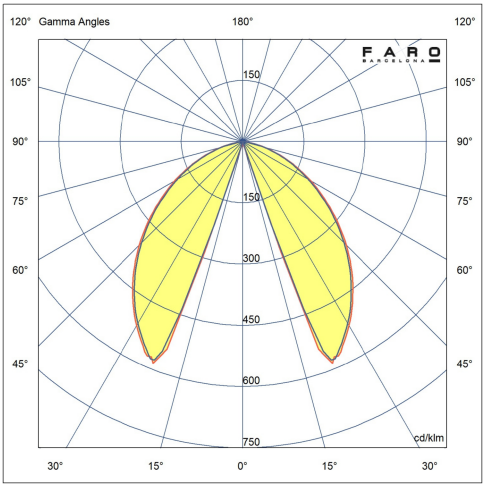

FARO
BARCELONA

PILO 350 Grey beacon lamp 2700K
Ref. 75595



PILO 350 Grey beacon lamp 3000K
Ref. 75596

IK06 IP65





Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	65
IK	06
Power (W)	6
Energy class light source	E
Light source	SMD LED
Power factor	0.9
Luminous Flux (lm)	370
Color temperature (K)	3000K
CRI	≥80
Suitable for seaside areas	Yes
Supply current	200 mA
Structure material	Concrete
Structure finish	Grey

Installation instructions

Energy label

Photometric



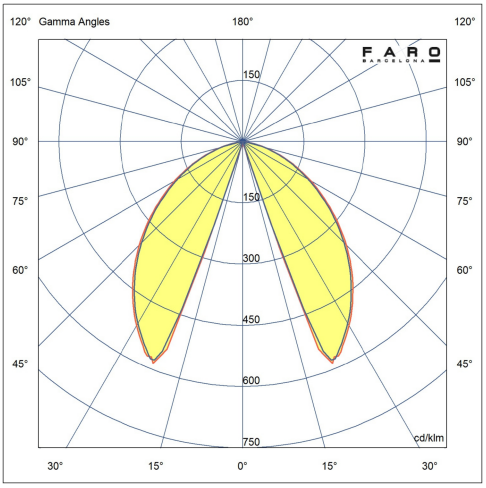

PILO 350 Grey beacon lamp 3000K
Ref. 75596

