
SETH 600 Black spike lamp
Ref. 70226

IK06 IP44






Mounting	Floor
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	44
IK	06
Power (W)	6
Energy class light source	G
Light source	SMD LED
Lifespan	15.000h
Power factor	0.5
Luminous Flux (lm)	375
Color temperature (K)	2700K
Opening angle degrees	40
Light orientation	Direct
Tilt angles	180
Rotation angles 2	355
Photobiological risk	1
CRI	>80
Suitable for seaside areas	No
Control System	On/off
Supply current	500 mA
Cable length	2000 mm
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Matt Black
RAL/Pantone structure	RAL 9004
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

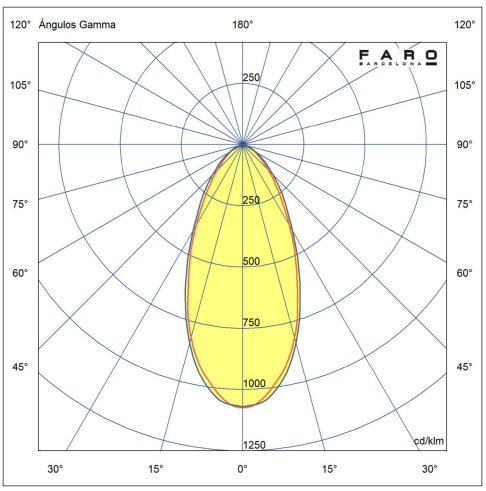

FARO
BARCELONA


SETH 600 Black spike lamp
Ref. 70226



SETH 280 Black spike lamp
Ref. 70227

IK06 IP44






Mounting	Floor
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	44
IK	06
Power (W)	6
Energy class light source	F
Light source	SMD LED
Lifespan	15.000h
Power factor	0.5
Luminous Flux (lm)	375
Color temperature (K)	2700K
Opening angle degrees	40
Light orientation	Direct
Tilt angles	180
Rotation angles 2	355
Photobiological risk	1
CRI	>80
Suitable for seaside areas	No
Control System	On/off
Supply current	500 mA
Cable length	2000 mm
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Matt Black
RAL/Pantone structure	RAL 9004
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

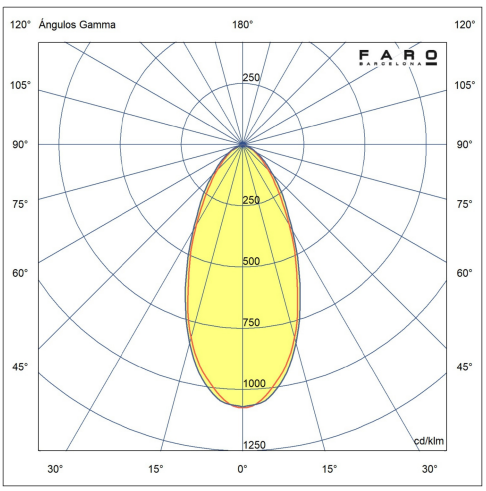

FARO
BARCELONA

SETH 280 Black spike lamp
Ref. 70227

