SHOKU 350 White/white wall/ceiling lamp
Ref. 64277 |ERNEST PERERA STUDIO

IP20





Mounting	Ceiling, Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	24
Energy class light source	E
Light source	SMD LED
Power factor	0.92
Luminous Flux (lm)	1213
Color temperature (K)	2700K
Light orientation	Direct
CRI	>90
Control System	TRIAC
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	White+White
Diffuser finish	Opal
Included Accessory	KIT DE FIJACION


Installation instructions

Energy label

Photometric





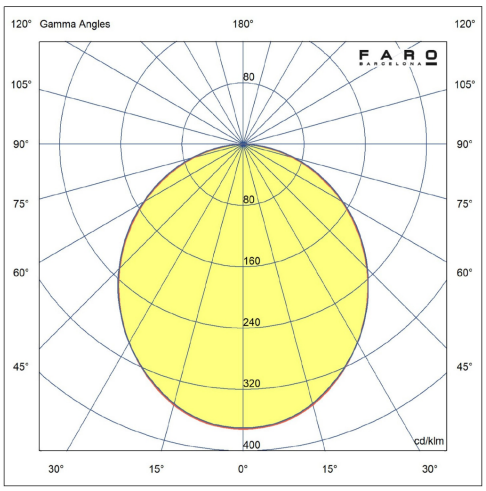

SHOKU 350 White/black wall/ceiling lamp
Ref. 64278 |ERNEST PERERA STUDIO

IP20





Mounting	Ceiling, Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	24
Energy class light source	E
Light source	SMD LED
Power factor	0.92
Luminous Flux (lm)	774
Color temperature (K)	2700K
Light orientation	Direct
CRI	>90
Control System	TRIAC
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	White+Black
Diffuser finish	Opal
Included Accessory	KIT DE FIJACION

Installation instructions

Energy label

Photometric

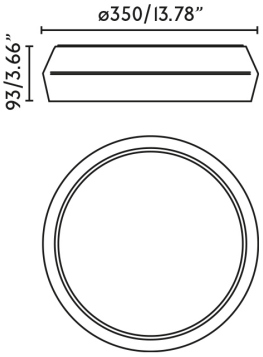

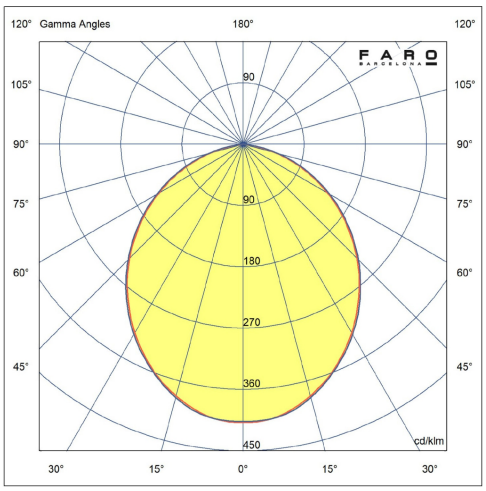

SHOKU 350 White/black wall/ceiling lamp
Ref. 64278 |ERNEST PERERA STUDIO



SHOKU 350 Black/black wall/ceiling lamp
Ref. 64279 |ERNEST PERERA STUDIO

IP20





Mounting	Ceiling, Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	24
Energy class light source	E
Light source	SMD LED
Power factor	0.92
Luminous Flux (lm)	774
Color temperature (K)	2700K
Light orientation	Direct
CRI	>90
Control System	TRIAC
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Black+Black
Diffuser finish	Opal
Included Accessory	KIT DE FIJACION


Installation instructions

Energy label

Photometric





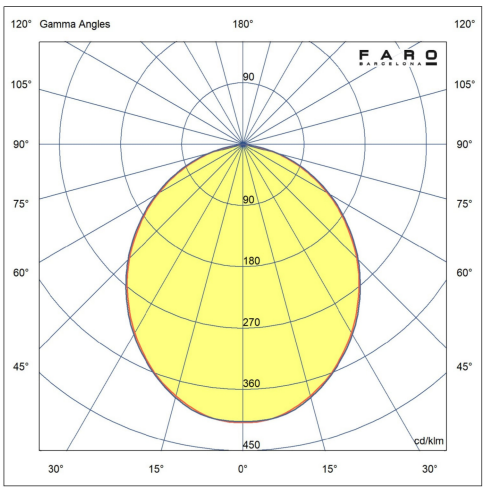

SHOKU 350 Grey/white wall/ceiling lamp
Ref. 64280 |ERNEST PERERA STUDIO

IP20





Mounting	Ceiling, Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	24
Energy class light source	E
Light source	SMD LED
Power factor	0.92
Luminous Flux (lm)	1213
Color temperature (K)	2700K
Light orientation	Direct
CRI	>90
Control System	TRIAC
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Light Grey+White
Diffuser finish	Opal
Included Accessory	KIT DE FIJACION

Installation instructions

Energy label

Photometric

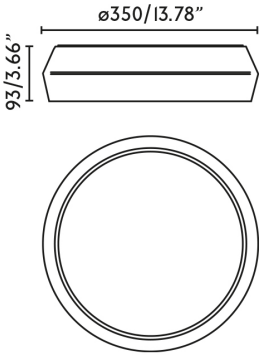

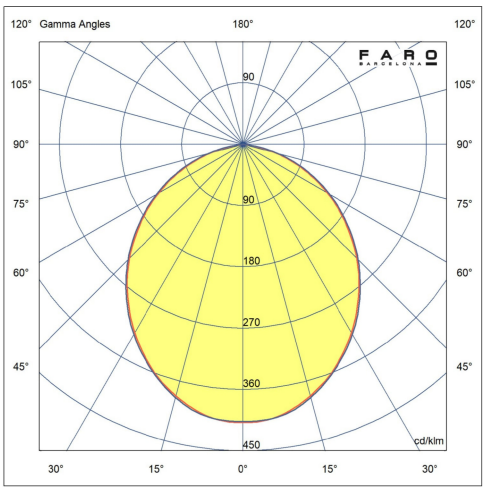

SHOKU 350 Grey/white wall/ceiling lamp
Ref. 64280 |ERNEST PERERA STUDIO



SHOKU 600 White/white wall/ceiling lamp
Ref. 64281 |ERNEST PERERA STUDIO

IP20





Mounting	Ceiling, Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	40
Energy class light source	E
Light source	SMD LED
Power factor	0.92
Luminous Flux (lm)	2442
Color temperature (K)	2700K
Light orientation	Direct
CRI	>90
Control System	TRIAC
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	White+White
Diffuser finish	Opal
Included Accessory	KIT DE FIJACION

Installation instructions

Energy label

Photometric

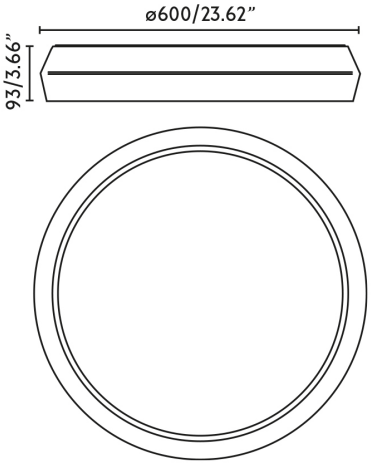

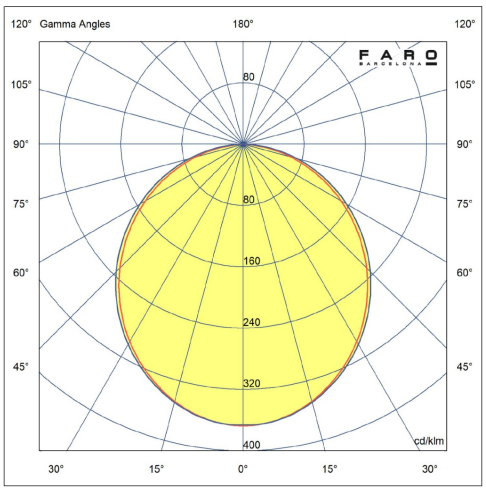

SHOKU 600 Black/black wall/ceiling lamp
Ref. 64282 |ERNEST PERERA STUDIO

IP20





Mounting	Ceiling, Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	40
Energy class light source	E
Light source	SMD LED
Power factor	0.92
Luminous Flux (lm)	1981
Color temperature (K)	2700K
Light orientation	Direct
CRI	>90
Control System	TRIAC
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Black+Black
Diffuser finish	Opal
Included Accessory	KIT DE FIJACION

Installation instructions

Energy label

Photometric

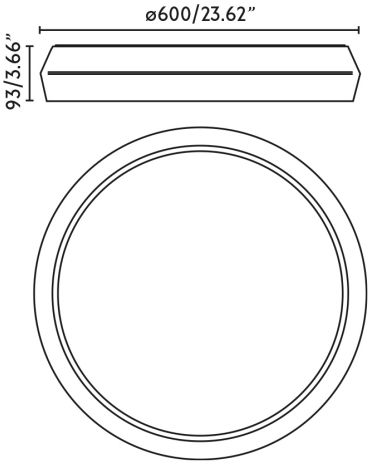

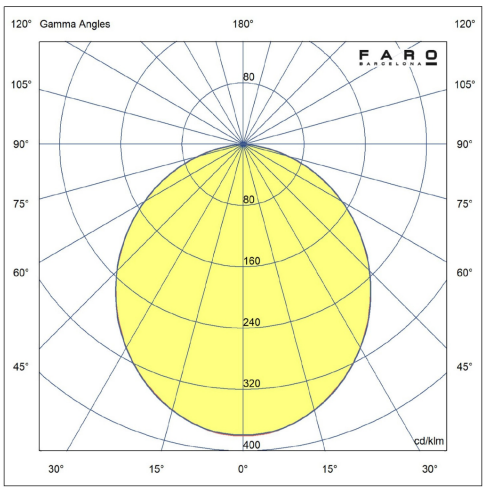

SHOKU 600 Black/black wall/ceiling lamp
Ref. 64282 |ERNEST PERERA STUDIO

