FARO
BARCELONA


# SOLE Terracotta round wall lamp
Ref. 40525

IP20



| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | I |
| IP | 20 |
| Power (W) | 8 |
| Light source | GU10 LED |
| Bulb format | MR16 |
| Number of lamp holders | 1 |
| Light orientation | Indirect lighting |
| Structure material | Aluminium + Steel |
| Structure finish | Terracotta+Black |
| RAL/Pantone structure | RAL8004 |

Installation instructions



# SOLE Terracotta round wall lamp
Ref. 40525

## Recommended bulbs



Bulb GU10 LED 7W 2700K 38°

| | |
|---|---|
| Reference | 17316 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 7 |
| Luminous Flux (lm) | 632 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 38 |



Bulb PHILLIPS MASTER LEDspotMV GU10 5W 2700K 36º 350lm.

| | |
|---|---|
| Reference | 97685327 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 4 |
| Luminous Flux (lm) | 345 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 36 |

FARO
BARCELONA


# SOLE White round wall lamp fluted
Ref. 40526



IP20

| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | I |
| IP | 20 |
| Power (W) | 8 |
| Light source | GU10 LED |
| Bulb format | MR16 |
| Number of lamp holders | 1 |
| Light orientation | Indirect lighting |
| Structure material | Aluminium + Steel |
| Structure finish | White+White |
| RAL/Pantone structure | RAL9003 |

Installation instructions



# SOLE White round wall lamp fluted
Ref. 40526

## Recommended bulbs



Bulb GU10 LED 7W 2700K 38°

| | |
|---|---|
| Reference | 17316 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 7 |
| Luminous Flux (lm) | 632 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 38 |




Bulb PHILLIPS MASTER LEDspotMV GU10 5W 2700K 36º 350lm.

| | |
|---|---|
| Reference | 97685327 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 4 |
| Luminous Flux (lm) | 345 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 36 |

FARO
BARCELONA

**SOLE White round wall lamp fluted**
Ref. 40526

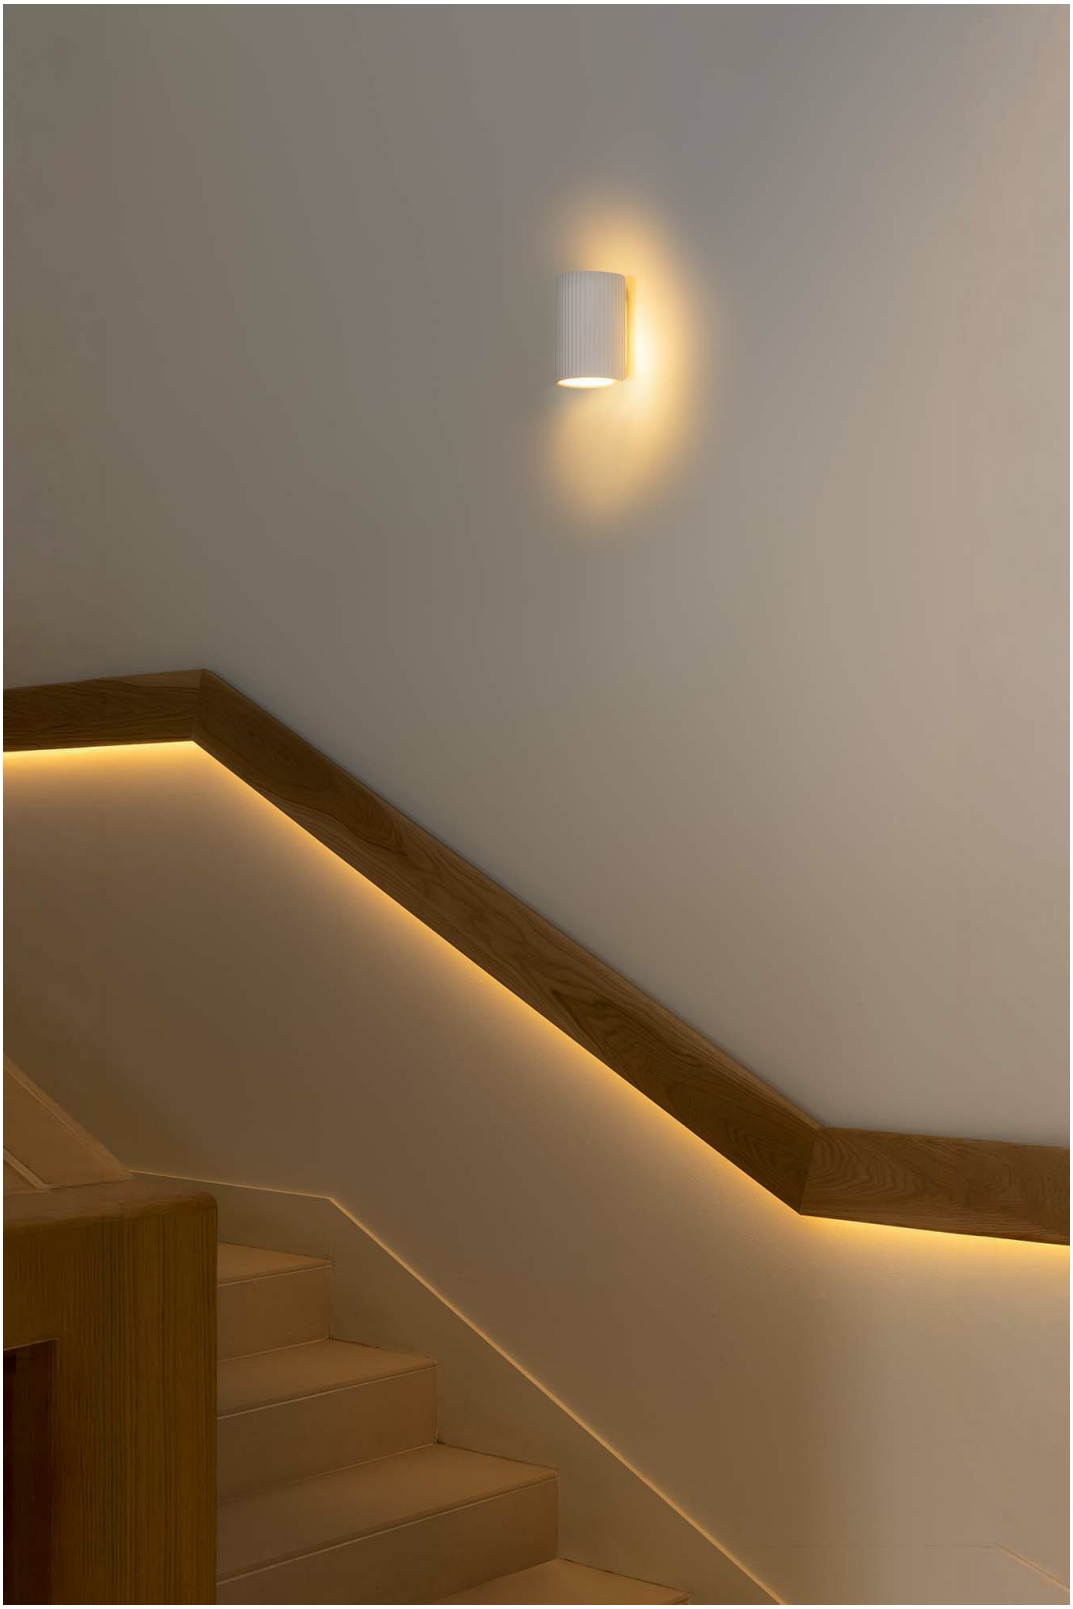

FARO
BARCELONA


# SOLE Black round wall lamp fluted
Ref. 40527

IP20



| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | I |
| IP | 20 |
| Power (W) | 8 |
| Light source | GU10 LED |
| Bulb format | MR16 |
| Number of lamp holders | 1 |
| Light orientation | Indirect lighting |
| Structure material | Aluminium + Steel |
| Structure finish | Black+Black |
| RAL/Pantone structure | RAL9004 |

Installation instructions



# SOLE Black round wall lamp fluted
Ref. 40527

## Recommended bulbs



Bulb GU10 LED 7W 2700K 38°

| | |
|---|---|
| Reference | 17316 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 7 |
| Luminous Flux (lm) | 632 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 38 |



Bulb PHILLIPS MASTER LEDspotMV GU10 5W 2700K 36º 350lm.

| | |
|---|---|
| Reference | 97685327 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 4 |
| Luminous Flux (lm) | 345 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 36 |

FARO
BARCELONA

**SOLE Black round wall lamp fluted**
Ref. 40527



FARO
BARCELONA


# SOLE Grey round wall lamp fluted
Ref. 40528

IP20



| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | I |
| IP | 20 |
| Power (W) | 8 |
| Light source | GU10 LED |
| Bulb format | MR16 |
| Number of lamp holders | 1 |
| Light orientation | Indirect lighting |
| Structure material | Aluminium + Steel |
| Structure finish | Grey+White |
| RAL/Pantone structure | RAL7044 |

Installation instructions



# SOLE Grey round wall lamp fluted
Ref. 40528

## Recommended bulbs



Bulb GU10 LED 7W 2700K 38°

| | |
|---|---|
| Reference | 17316 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 7 |
| Luminous Flux (lm) | 632 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 38 |



Bulb PHILLIPS MASTER LEDspotMV GU10 5W 2700K 36º 350lm.

| | |
|---|---|
| Reference | 97685327 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 4 |
| Luminous Flux (lm) | 345 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 36 |

FARO
BARCELONA


# SOLE Terracotta round wall lamp fluted
Ref. 40529

IP20



| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | I |
| IP | 20 |
| Power (W) | 8 |
| Light source | GU10 LED |
| Bulb format | MR16 |
| Number of lamp holders | 1 |
| Light orientation | Indirect lighting |
| Structure material | Aluminium + Steel |
| Structure finish | Terracotta+Black |
| RAL/Pantone structure | RAL8004 |

Installation instructions



# SOLE Terracotta round wall lamp fluted
Ref. 40529

## Recommended bulbs



Bulb GU10 LED 7W 2700K 38°

| | |
|---|---|
| Reference | 17316 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 7 |
| Luminous Flux (lm) | 632 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 38 |



Bulb PHILLIPS MASTER LEDspotMV GU10 5W 2700K 36º 350lm.

| | |
|---|---|
| Reference | 97685327 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 4 |
| Luminous Flux (lm) | 345 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 36 |


# SOLE 2L White round wall lamp
Ref. 40538



IP20

| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | I |
| IP | 20 |
| Power (W) | 8 |
| Light source | GU10 LED |
| Bulb format | MR16 |
| Number of lamp holders | 2 |
| Light orientation | Indirect lighting |
| Structure material | Aluminium + Steel |
| Structure finish | White+White |
| RAL/Pantone structure | RAL9003 |

Installation instructions



# SOLE 2L White round wall lamp
Ref. 40538

## Recommended bulbs



Bulb GU10 LED 7W 2700K 38°

| | |
|---|---|
| Reference | 17316 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 7 |
| Luminous Flux (lm) | 632 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 38 |



Bulb PHILLIPS MASTER LEDspotMV GU10 5W 2700K 36º 350lm.


| | |
|---|---|
| Reference | 97685327 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 4 |
| Luminous Flux (lm) | 345 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 36 |

# SOLE 2L Black round wall lamp
Ref. 40539



| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | I |
| IP | 20 |
| Power (W) | 8 |
| Light source | GU10 LED |
| Bulb format | MR16 |
| Number of lamp holders | 2 |
| Light orientation | Indirect lighting |
| Structure material | Aluminium + Steel |
| Structure finish | Black+Black |
| RAL/Pantone structure | RAL9004 |

Installation instructions



# SOLE 2L Black round wall lamp
Ref. 40539

## Recommended bulbs



Bulb GU10 LED 7W 2700K 38°

| | |
|---|---|
| Reference | 17316 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 7 |
| Luminous Flux (lm) | 632 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 38 |



Bulb PHILLIPS MASTER LEDspotMV GU10 5W 2700K 36º 350lm.

| | |
|---|---|
| Reference | 97685327 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 4 |
| Luminous Flux (lm) | 345 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 36 |

FARO
BARCELONA


# SOLE 2L Grey round wall lamp
Ref. 40540



IP20

| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | I |
| IP | 20 |
| Power (W) | 8 |
| Light source | GU10 LED |
| Bulb format | MR16 |
| Number of lamp holders | 2 |
| Light orientation | Indirect lighting |
| Structure material | Aluminium + Steel |
| Structure finish | Grey+White |
| RAL/Pantone structure | RAL7044 |

Installation instructions



# SOLE 2L Grey round wall lamp
Ref. 40540

## Recommended bulbs



Bulb GU10 LED 7W 2700K 38°

| | |
|---|---|
| Reference | 17316 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 7 |
| Luminous Flux (lm) | 632 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 38 |



Bulb PHILLIPS MASTER LEDspotMV GU10 5W 2700K 36º 350lm.

| | |
|---|---|
| Reference | 97685327 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 4 |
| Luminous Flux (lm) | 345 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 36 |

FARO
BARCELONA

**SOLE 2L Grey round wall lamp**
Ref. 40540




Document generated on 24/09/2026

# SOLE 2L Terracotta round wall lamp

Ref. 40541






IP20

| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | I |
| IP | 20 |
| Power (W) | 8 |
| Light source | GU10 LED |
| Bulb format | MR16 |
| Number of lamp holders | 2 |
| Light orientation | Indirect lighting |
| Structure material | Aluminium + Steel |
| Structure finish | Terracotta+Black |
| RAL/Pantone structure | RAL8004 |

Installation instructions

## Recommended bulbs



Bulb GU10 LED 7W 2700K 38°

| | |
|---|---|
| Reference | 17316 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 7 |
| Luminous Flux (lm) | 632 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 38 |



Bulb PHILLIPS MASTER LEDspotMV GU10 5W 2700K 36º 350lm.

| | |
|---|---|
| Reference | 97685327 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 4 |
| Luminous Flux (lm) | 345 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 36 |

FARO
BARCELONA


# SOLE 2L White round wall lamp fluted
Ref. 40542

IP20



| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | I |
| IP | 20 |
| Power (W) | 8 |
| Light source | GU10 LED |
| Bulb format | MR16 |
| Number of lamp holders | 2 |
| Light orientation | Indirect lighting |
| Structure material | Aluminium + Steel |
| Structure finish | White+White |
| RAL/Pantone structure | RAL9003 |

Installation instructions



# SOLE 2L White round wall lamp fluted
Ref. 40542

## Recommended bulbs



Bulb GU10 LED 7W 2700K 38°


| | |
|---|---|
| Reference | 17316 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 7 |
| Luminous Flux (lm) | 632 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 38 |




Bulb PHILLIPS MASTER LEDspotMV GU10 5W 2700K 36º 350lm.

| | |
|---|---|
| Reference | 97685327 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 4 |
| Luminous Flux (lm) | 345 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 36 |

# SOLE 2L Black round wall lamp fluted
Ref. 40543

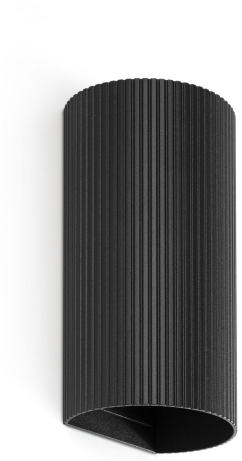




IP20

| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | I |
| IP | 20 |
| Power (W) | 8 |
| Light source | GU10 LED |
| Bulb format | MR16 |
| Number of lamp holders | 2 |
| Light orientation | Indirect lighting |
| Structure material | Aluminium + Steel |
| Structure finish | Black+Black |
| RAL/Pantone structure | RAL9004 |

Installation instructions

# SOLE 2L Black round wall lamp fluted
Ref. 40543

## Recommended bulbs



Bulb GU10 LED 7W 2700K 38°

| | |
|---|---|
| Reference | 17316 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 7 |
| Luminous Flux (lm) | 632 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 38 |



Bulb PHILLIPS MASTER LEDspotMV GU10 5W 2700K 36º 350lm.

| | |
|---|---|
| Reference | 97685327 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 4 |
| Luminous Flux (lm) | 345 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 36 |

FARO
BARCELONA

**SOLE 2L Black round wall lamp fluted**
Ref. 40543




Document generated on 24/09/2026

FARO
BARCELONA

# SOLE 2L Grey round wall lamp fluted
Ref. 40544






IP20

| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | I |
| IP | 20 |
| Power (W) | 8 |
| Light source | GU10 LED |
| Bulb format | MR16 |
| Number of lamp holders | 2 |
| Light orientation | Indirect lighting |
| Structure material | Aluminium + Steel |
| Structure finish | Grey+White |
| RAL/Pantone structure | RAL7044 |

Installation instructions

# SOLE 2L Grey round wall lamp fluted
Ref. 40544

## Recommended bulbs



Bulb GU10 LED 7W 2700K 38°

| | |
|---|---|
| Reference | 17316 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 7 |
| Luminous Flux (lm) | 632 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 38 |




Bulb PHILLIPS MASTER LEDspotMV GU10 5W 2700K 36º 350lm.

| | |
|---|---|
| Reference | 97685327 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 4 |
| Luminous Flux (lm) | 345 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 36 |

# SOLE 2L Terracotta round wall lamp fluted

Ref. 40545






IP20

| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | I |
| IP | 20 |
| Power (W) | 8 |
| Light source | GU10 LED |
| Bulb format | MR16 |
| Number of lamp holders | 2 |
| Light orientation | Indirect lighting |
| Structure material | Aluminium + Steel |
| Structure finish | Terracotta+Black |
| RAL/Pantone structure | RAL8004 |

Installation instructions

# SOLE 2L Terracotta round wall lamp fluted
Ref. 40545

## Recommended bulbs



Bulb GU10 LED 7W 2700K 38°

| | |
|---|---|
| Reference | 17316 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 7 |
| Luminous Flux (lm) | 632 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 38 |



Bulb PHILLIPS MASTER LEDspotMV GU10 5W 2700K 36º 350lm.

| | |
|---|---|
| Reference | 97685327 |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Power (W) | 4 |
| Luminous Flux (lm) | 345 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 36 |