SPARK Dark grey recessed lamp
Ref. 70162

IK10 IP65





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	10
Power (W)	5
Energy class light source	D
Light source	SMD LED
Luminous Flux (lm)	277
Color temperature (K)	3000K
CRI	>80
Structure material	Aluminium
Diffuser material	PC
Structure finish	Dark Grey
Diffuser finish	Opal
Cut-out Size for Recessed Mount	95x55x60
Includes recessed box	Yes

Installation instructions

Energy label

Photometric



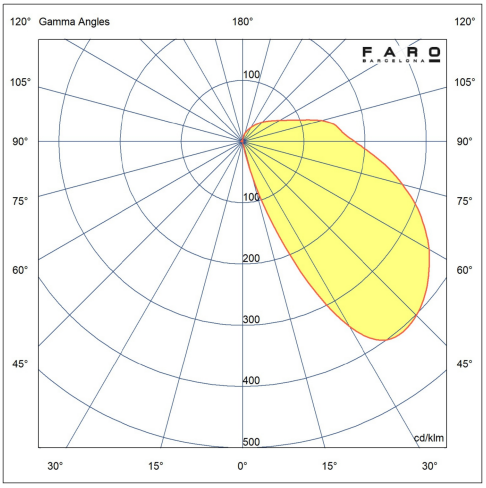


SPARK Dark grey recessed lamp
Ref. 70162



SPARK White recessed lamp
Ref. 70163

IK10 IP65



Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	10
Power (W)	5
Energy class light source	D
Light source	SMD LED
Luminous Flux (lm)	277
Color temperature (K)	3000K
CRI	>80
Structure material	Aluminium
Diffuser material	PC
Structure finish	Matt White
Diffuser finish	Opal
Cut-out Size for Recessed Mount	95x55x60
Includes recessed box	Yes

Installation instructions

Energy label

Photometric

