TOTEM 285 Grey beacon lamp 2700K
Ref. 75550 |ROGER VANCELLS

IK06 IP55





Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	55
IK	06
Power (W)	6,5
Energy class light source	E
Light source	SMD LED
Power factor	0.9
Luminous Flux (lm)	254
Color temperature (K)	2700K
CRI	≥80
Suitable for seaside areas	Yes
Supply current	200 mA
Structure material	Concrete
Structure finish	Grey
Included Accessory	KIT DE FIJACION
Other functionalities	Includes IP68 connector

Installation instructions

Energy label

Photometric



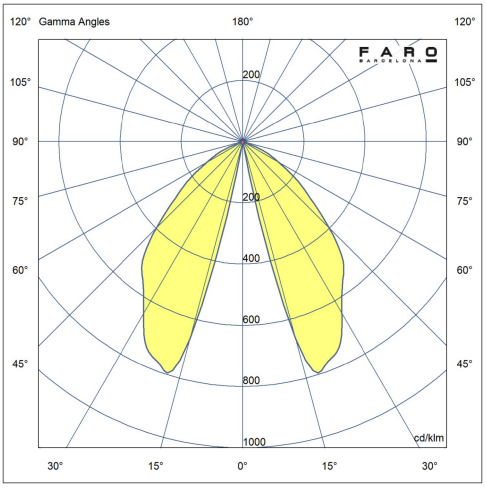

TOTEM 285 Grey beacon lamp 2700K
Ref. 75550 |ROGER VANCELLS



TOTEM 285 Grey beacon lamp 3000K
Ref. 75551 |ROGER VANCELLS

IK06 IP55





Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	55
IK	06
Power (W)	6,5
Energy class light source	E
Light source	SMD LED
Power factor	0.9
Luminous Flux (lm)	370
Color temperature (K)	3000K
CRI	≥80
Suitable for seaside areas	Yes
Supply current	200 mA
Structure material	Concrete
Structure finish	Grey
Included Accessory	KIT DE FIJACION
Other functionalities	Includes IP68 connector

Installation instructions

Energy label

Photometric



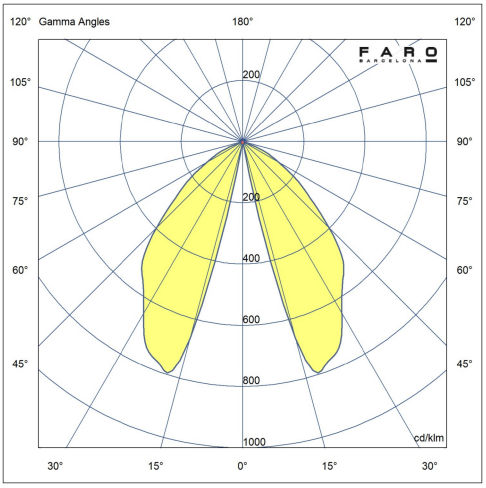

TOTEM 285 Grey beacon lamp 3000K
Ref. 75551 |ROGER VANCELLS



TOTEM 611 Grey beacon lamp 2700K
Ref. 75552 |ROGER VANCELLS

IK06 IP55





Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	55
IK	06
Power (W)	6,5
Energy class light source	E
Light source	SMD LED
Power factor	0.9
Luminous Flux (lm)	307
Color temperature (K)	2700K
CRI	≥80
Suitable for seaside areas	Yes
Supply current	200 mA
Structure material	Concrete
Structure finish	Grey
Included Accessory	KIT DE FIJACION
Other functionalities	Includes IP68 connector

Installation instructions

Energy label

Photometric



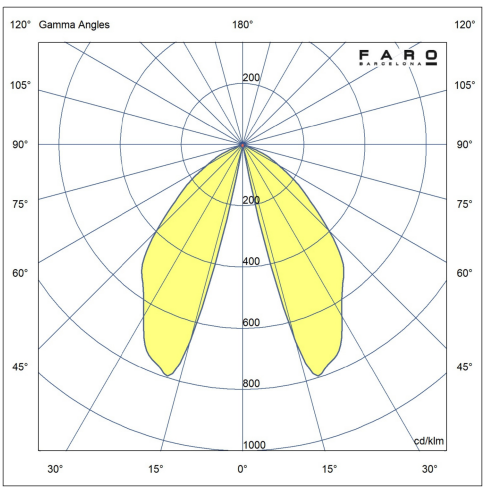

TOTEM 611 Grey beacon lamp 2700K
Ref. 75552 |ROGER VANCELLS



TOTEM 611 Grey beacon lamp 3000K

Ref. 75553 |ROGER VANCELLS

IK06 IP55





Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	55
IK	06
Power (W)	6,5
Energy class light source	E
Light source	SMD LED
Power factor	0.9
Luminous Flux (lm)	370
Color temperature (K)	3000K
CRI	≥80
Suitable for seaside areas	Yes
Supply current	200 mA
Structure material	Concrete
Structure finish	Grey
Other functionalities	Includes IP68 connector

Installation instructions

Energy label

Photometric



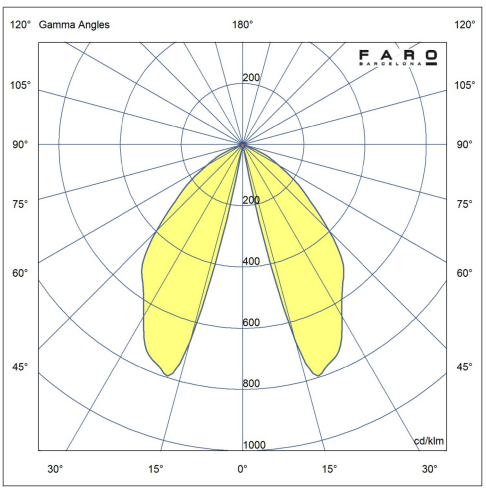

FARO
BARCELONA

TOTEM 611 Grey beacon lamp 3000K

Ref. 75553 |ROGER VANCELLS

