TURA 650 Dark grey beacon lamp

Ref. 75545

IK06 IP65





Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	06
Power (W)	20
Energy class light source	E
Light source	SMD LED
Lifespan	50.000h L70 B50
Power factor	0.7
Luminous Flux (lm)	1745
Color temperature (K)	3000K
Opening angle degrees	280
Light orientation	Direct
Photobiological risk	1
CRI	90
Suitable for seaside areas	No
Control System	On/off
Structure material	Aluminium
Diffuser material	PC
Structure finish	Dark Grey
Diffuser finish	Translucent

Installation instructions

Energy label


Photometric



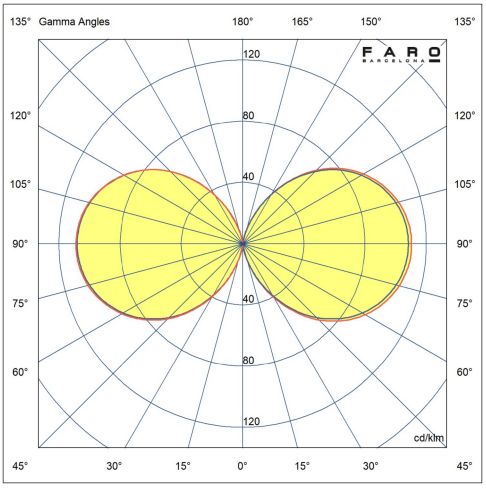

FARO
BARCELONA

TURA 650 Dark grey beacon lamp
Ref. 75545

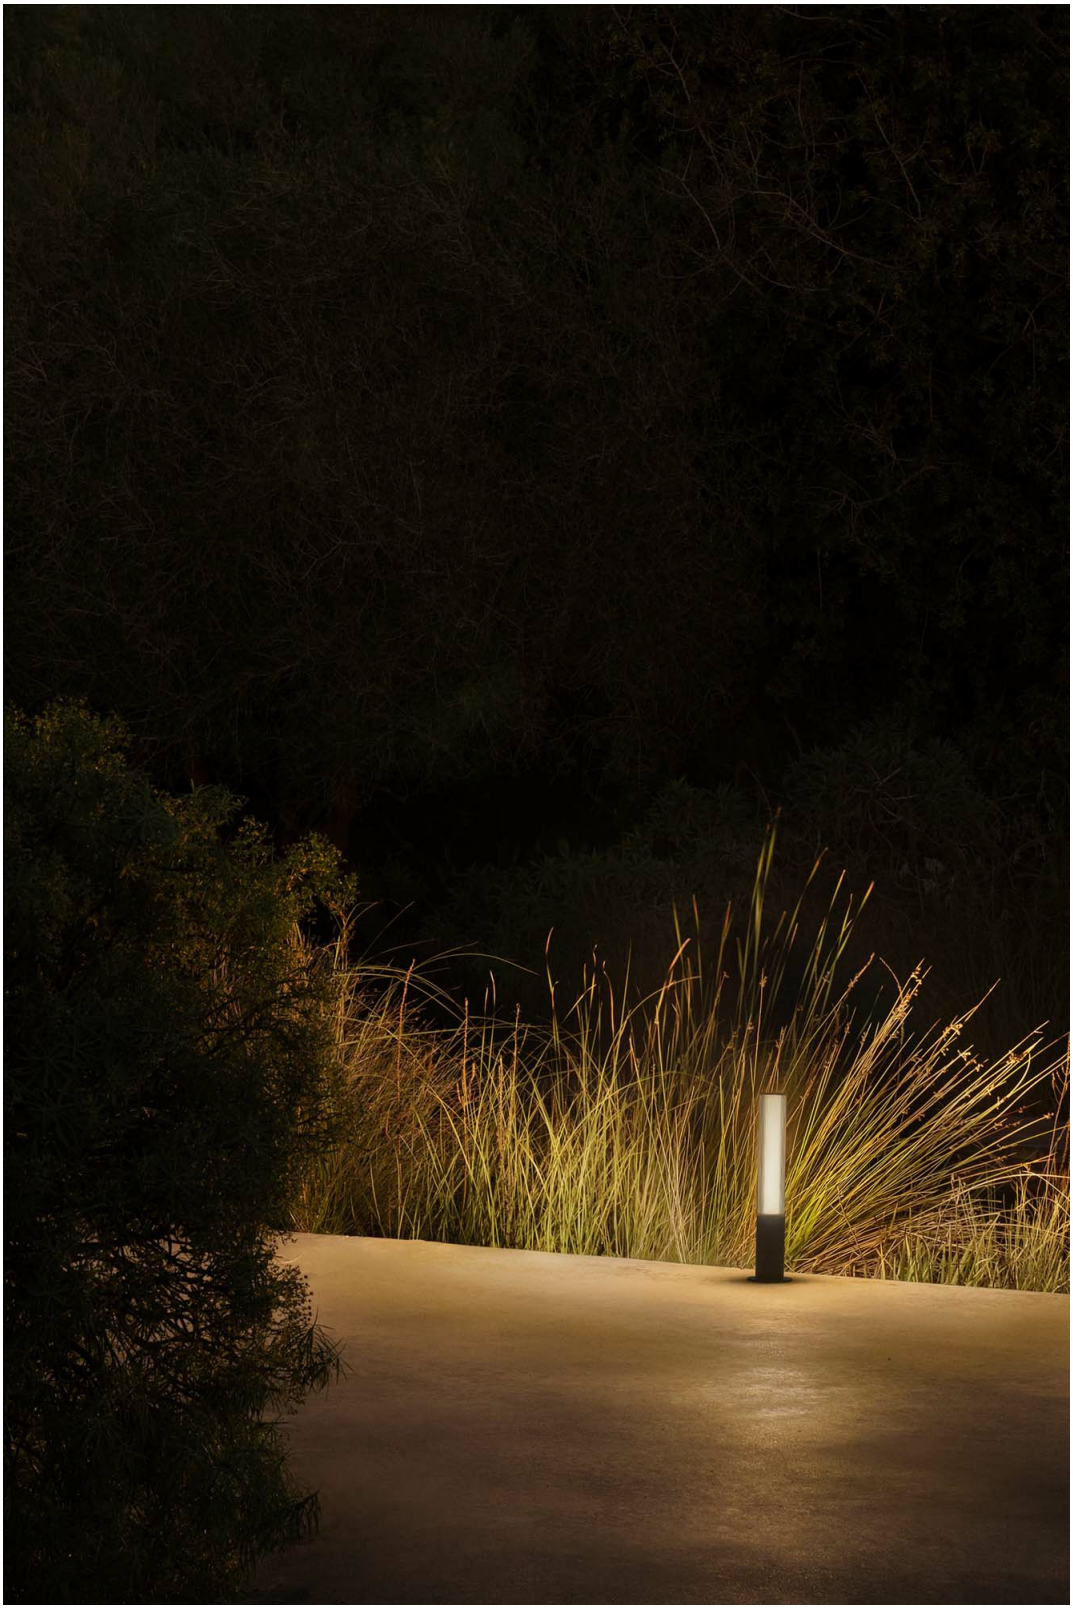

TURA 1050 Dark grey beacon lamp
Ref. 75546

IK06 IP65





Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	06
Power (W)	28
Energy class light source	E
Light source	SMD LED
Lifespan	50.000h L70 B50
Power factor	0.96
Luminous Flux (lm)	3036
Color temperature (K)	3000K
Opening angle degrees	280
Light orientation	Direct
Photobiological risk	1
CRI	90
Suitable for seaside areas	No
Control System	On/off
Structure material	Aluminium
Diffuser material	PC
Structure finish	Dark Grey
Diffuser finish	Translucent

Installation instructions

Energy label

Photometric



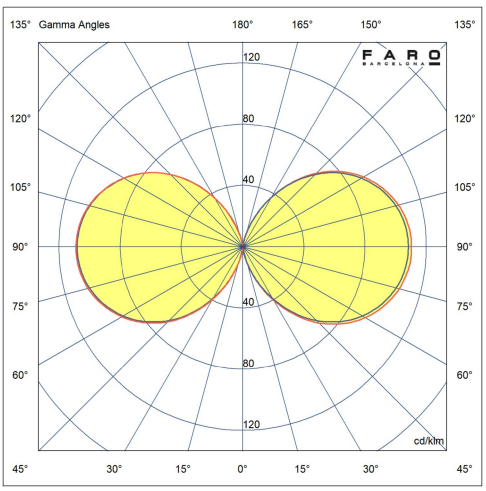


TURA 2050 Dark grey lamp post
Ref. 75547

IK06 IP65





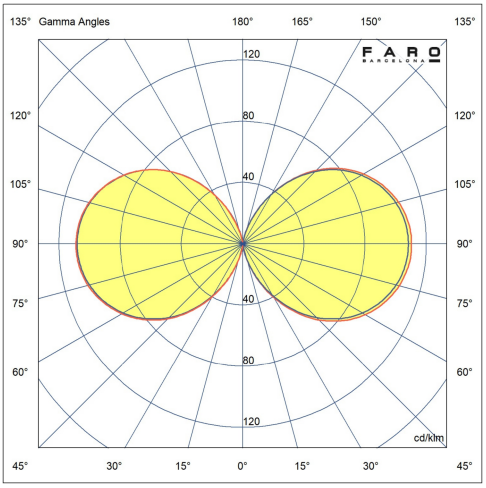

Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	06
Power (W)	48
Energy class light source	E
Light source	SMD LED
Lifespan	50.000h L70 B50
Power factor	0.95
Luminous Flux (lm)	4784
Color temperature (K)	3000K
Opening angle degrees	280
Light orientation	Direct
Photobiological risk	1
CRI	90
Suitable for seaside areas	No
Control System	On/off
Structure material	Aluminium
Diffuser material	PC
Structure finish	Dark Grey
Diffuser finish	Translucent

Installation instructions

Energy label

Photometric

FARO
BARCELONA

TURA 2050 Dark grey lamp post
Ref. 75547

