VICO 600 Black pendant lamp with recessed canopy

Ref. 61105 |FARO LAB

IP20




Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Energy class light source	E
Light source	SMD LED
Luminous Flux (lm)	925
Color temperature (K)	2700K
Opening angle degrees	110
CRI	≥90
Control System	TRIAC
Supply current	700 mA
Cable length	2000 mm
Structure material	Aluminium
Diffuser material	PC
Structure finish	Matt Black
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



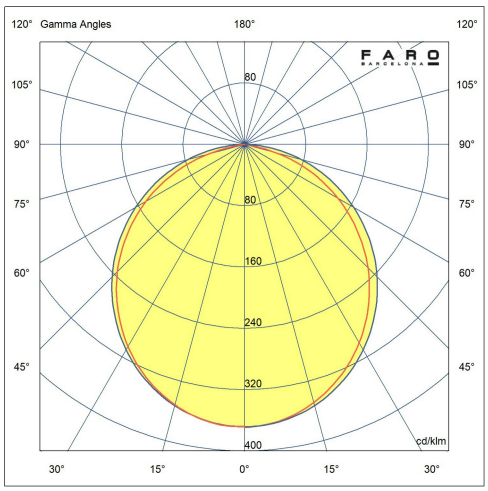

VICO 600 Black pendant lamp with recessed canopy
Ref. 61105 |FARO LAB



VICO 600 Black pendant lamp with surface canopy

Ref. 61101 |FARO LAB

IP20





Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Energy class light source	E
Light source	SMD LED
Luminous Flux (lm)	925
Color temperature (K)	2700K
Opening angle degrees	110
CRI	≥90
Control System	TRIAC
Supply current	700 mA
Cable length	2000 mm
Structure material	Aluminium
Diffuser material	PC
Structure finish	Matt Black
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



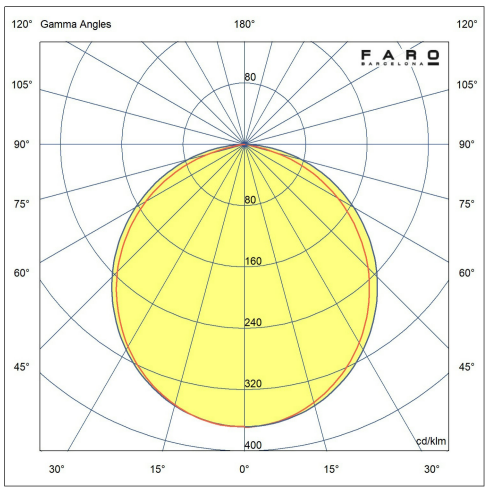


VICO 600 Black pendant lamp with surface canopy
Ref. 61101 |FARO LAB



VICO 1150 Black pendant lamp with surface canopy

Ref. 61103 |FARO LAB

IP20

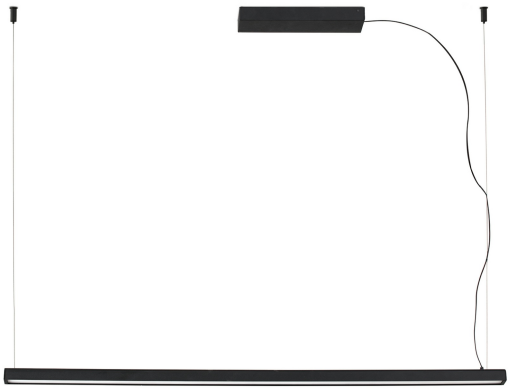



Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	30
Energy class light source	E
Light source	SMD LED
Luminous Flux (lm)	1703
Color temperature (K)	2700K
Opening angle degrees	110
CRI	≥90
Control System	TRIAC
Supply current	700 mA
Cable length	2000 mm
Structure material	Aluminium
Diffuser material	PC
Structure finish	Matt Black
Diffuser finish	Opal

Installation instructions

Energy label

Photometric

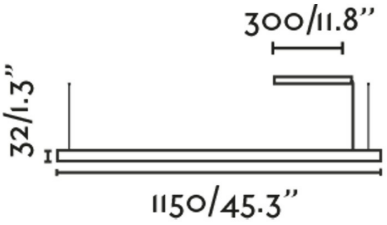

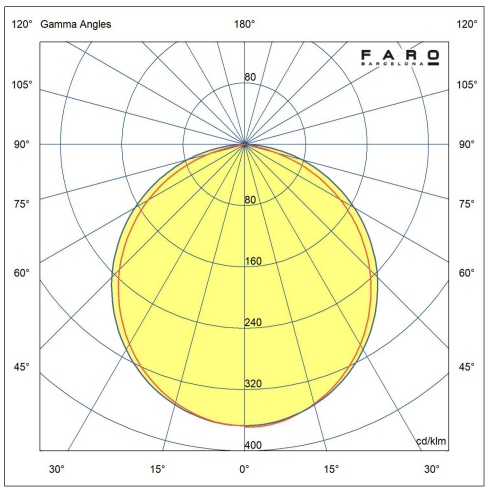


VICO 1150 Black pendant lamp with surface canopy
Ref. 61103 |FARO LAB



VICO 1150 Black pendant lamp with recessed canopy

Ref. 61104 |FARO LAB

IP20
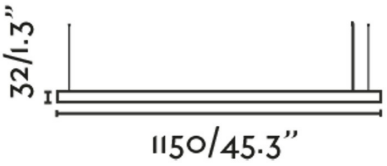


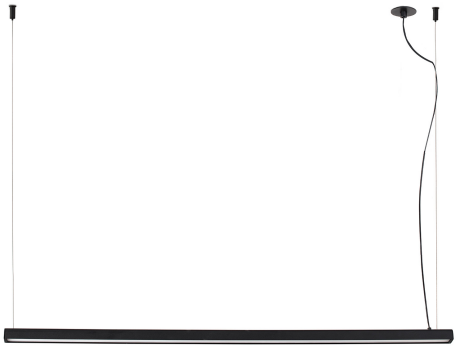
Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	30
Energy class light source	E
Light source	SMD LED
Luminous Flux (lm)	1703
Color temperature (K)	2700K
Opening angle degrees	110
CRI	≥90
Control System	TRIAC
Supply current	700 mA
Cable length	2000 mm
Structure material	Aluminium
Diffuser material	PC
Structure finish	Matt Black
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



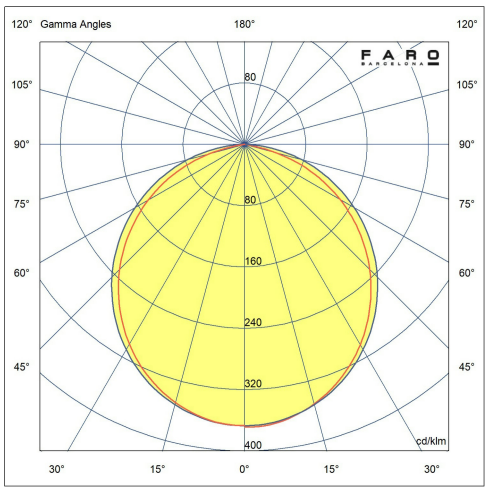

VICO 1150 Black pendant lamp with recessed canopy
Ref. 61104 |FARO LAB

