# VOLGA 310 Black wall lamp 5W
Ref. 63512

IP44





| | |
|---|---|
| Mounting | Wall, Ceiling |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 44 |
| Power (W) | 5 |
| Energy class light source | E |
| Light source | SMD LED |
| Lifespan | 30.000h L70 B50 |
| Power factor | 0.75 |
| Luminous Flux (lm) | 469 |
| Color temperature (K) | 3000K |
| Opening angle degrees | 105 |
| Light orientation | Direct |
| Photobiological risk | 1 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 300 mA |
| Structure material | Aluminium |
| Diffuser material | PMMA |
| Structure finish | Matt Black |
| Diffuser finish | Opal |

Installation instructions

Energy label

Photometric



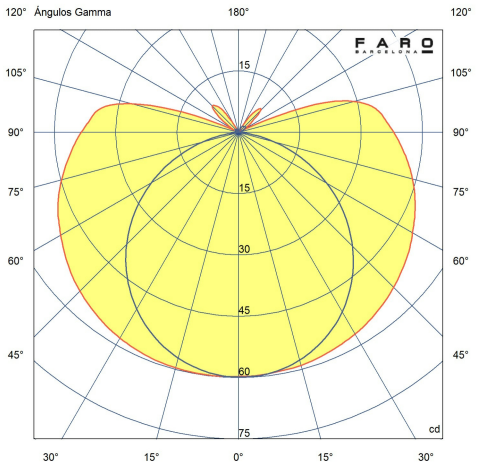

# VOLGA 310 Chrome wall lamp 5W
Ref. 63507

IP44





| | |
|---|---|
| Mounting | Wall, Ceiling |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 44 |
| Power (W) | 5 |
| Energy class light source | E |
| Light source | SMD LED |
| Lifespan | 30.000h L70 B50 |
| Power factor | 0.75 |
| Luminous Flux (lm) | 469 |
| Color temperature (K) | 3000K |
| Opening angle degrees | 105 |
| Light orientation | Direct |
| Photobiological risk | 1 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 300 mA |
| Structure material | Aluminium |
| Diffuser material | PMMA |
| Structure finish | Chrome |
| Diffuser finish | Opal |

Installation instructions

Energy label

Photometric



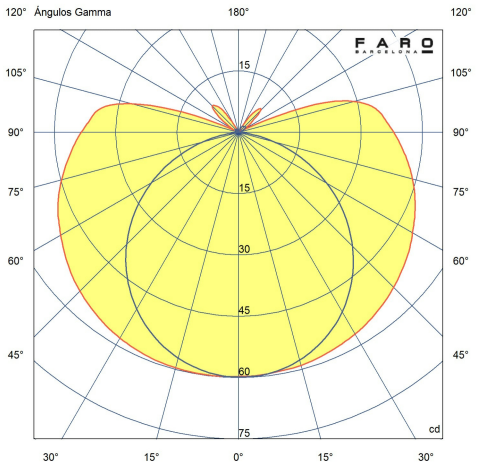FARO
BARCELONA

**VOLGA 310 Chrome wall lamp 5W**
Ref. 63507



# VOLGA 600 Black wall lamp 12W
Ref. 63513

IP44





| | |
|---|---|
| Mounting | Wall, Ceiling |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 44 |
| Power (W) | 12 |
| Energy class light source | D |
| Light source | SMD LED |
| Lifespan | 30.000h L70 B50 |
| Power factor | 0.75 |
| Luminous Flux (lm) | 1231 |
| Color temperature (K) | 3000K |
| Opening angle degrees | 105 |
| Light orientation | Direct |
| Photobiological risk | 1 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 300 mA |
| Structure material | Aluminium |
| Diffuser material | PMMA |
| Structure finish | Matt Black |
| Diffuser finish | Opal |

Installation instructions

Energy label

Photometric


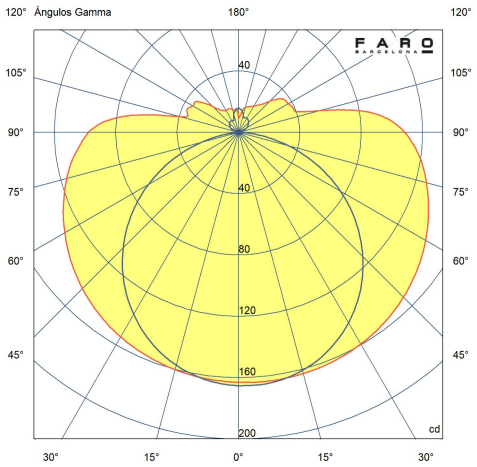
# VOLGA 600 Chrome wall lamp 12W
Ref. 63508

IP44





| | |
|---|---|
| Mounting | Wall, Ceiling |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 44 |
| Power (W) | 12 |
| Energy class light source | D |
| Light source | SMD LED |
| Lifespan | 30.000h L70 B50 |
| Power factor | 0.75 |
| Luminous Flux (lm) | 1231 |
| Color temperature (K) | 3000K |
| Opening angle degrees | 105 |
| Light orientation | Direct |
| Photobiological risk | 1 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 300 mA |
| Structure material | Aluminium |
| Diffuser material | PMMA |
| Structure finish | Chrome |
| Diffuser finish | Opal |

Installation instructions

Energy label

Photometric



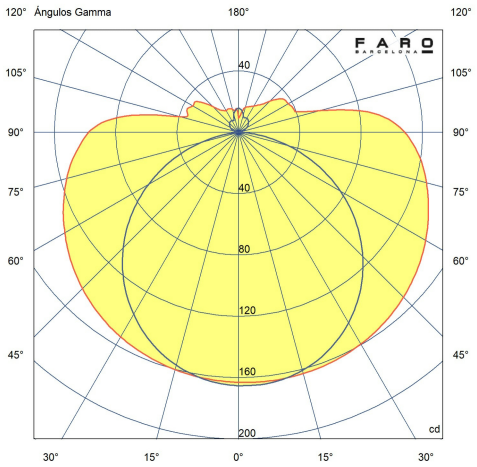FARO
BARCELONA

**VOLGA 600 Chrome wall lamp 12W**
Ref. 63508

# VOLGA 900 Black wall lamp 18W
Ref. 63514

IP44





| | |
|---|---|
| Mounting | Wall, Ceiling |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 44 |
| Power (W) | 18 |
| Energy class light source | D |
| Light source | SMD LED |
| Lifespan | 30.000h L70 B50 |
| Power factor | 0.75 |
| Luminous Flux (lm) | 1930 |
| Color temperature (K) | 3000K |
| Opening angle degrees | 105 |
| Light orientation | Direct |
| Photobiological risk | 1 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 300 mA |
| Structure material | Aluminium |
| Diffuser material | PMMA |
| Structure finish | Matt Black |
| Diffuser finish | Opal |

Installation instructions

Energy label

Photometric


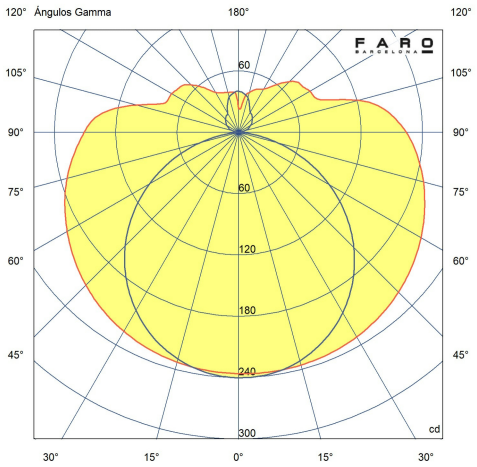
# VOLGA 900 Chrome wall lamp 18W
Ref. 63509

IP44



| | |
|---|---|
| Mounting | Wall, Ceiling |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 44 |
| Power (W) | 18 |
| Energy class light source | D |
| Light source | SMD LED |
| Lifespan | 30.000h L70 B50 |
| Power factor | 0.75 |
| Luminous Flux (lm) | 1930 |
| Color temperature (K) | 3000K |
| Opening angle degrees | 105 |
| Light orientation | Direct |
| Photobiological risk | 1 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 300 mA |
| Structure material | Aluminium |
| Diffuser material | PMMA |
| Structure finish | Chrome |
| Diffuser finish | Opal |

Installation instructions

Energy label

Photometric

