VUK White ceiling lamp
Ref. 64188

IP44





Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	40
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	2404
Color temperature (K)	2700K
Opening angle degrees	110
Light orientation	Direct
CRI	>80
Structure material	Steel
Diffuser material	PMMA
Structure finish	Matt White
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



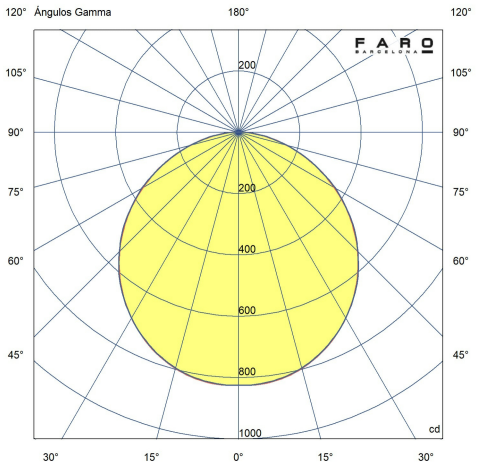

FARO
BARCELONA

VUK White ceiling lamp
Ref. 64188



VUK Black ceiling lamp
Ref. 64188n

IP44





Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	40
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	2404
Color temperature (K)	2700K
Opening angle degrees	110
Light orientation	Direct
CRI	>80
Structure material	Steel
Diffuser material	PMMA
Structure finish	Matt Black
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



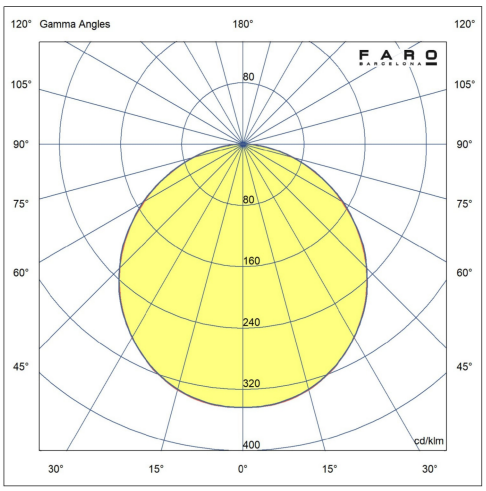

VUK Black ceiling lamp
Ref. 64188n

