DANUBIO 285 Chrome wall lamp 9W
Ref. 63600

IP44





Mounting	Wall, Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	9
Energy class light source	E
Light source	SMD LED
Lifespan	50.000h L70 B50
Power factor	0.94
Luminous Flux (lm)	579
Color temperature (K)	2700K
Opening angle degrees	160
Light orientation	Direct
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	300 mA
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Chrome
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



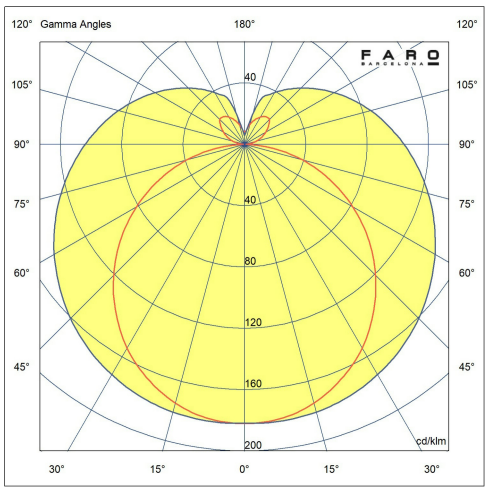

DANUBIO 285 Chrome wall lamp 9W
Ref. 63600

DANUBIO 285 Bronze wall lamp 9W
Ref. 63603

IP44





Mounting	Wall, Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	9
Energy class light source	E
Light source	SMD LED
Lifespan	50.000h L70 B50
Power factor	0.94
Luminous Flux (lm)	579
Color temperature (K)	2700K
Opening angle degrees	160
Light orientation	Direct
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	300 mA
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Bronze
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



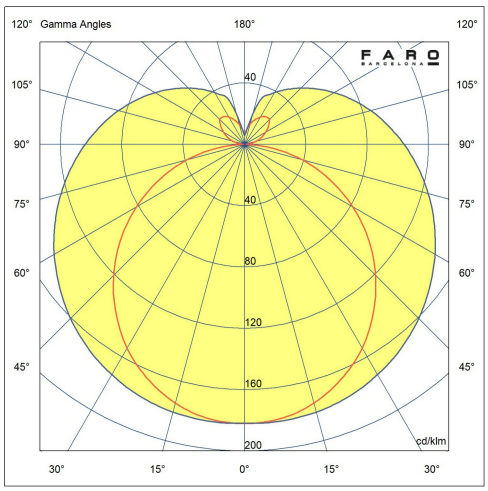

FARO
BARCELONA

DANUBIO 285 Bronze wall lamp 9W

Ref. 63603



DANUBIO 395 Bronze wall lamp 12W
Ref. 63604

IP44





Mounting	Wall, Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	12
Energy class light source	D
Light source	SMD LED
Lifespan	50.000h L70 B50
Power factor	0.89
Luminous Flux (lm)	780
Color temperature (K)	2700K
Opening angle degrees	160
Light orientation	Direct
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	300 mA
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Bronze
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



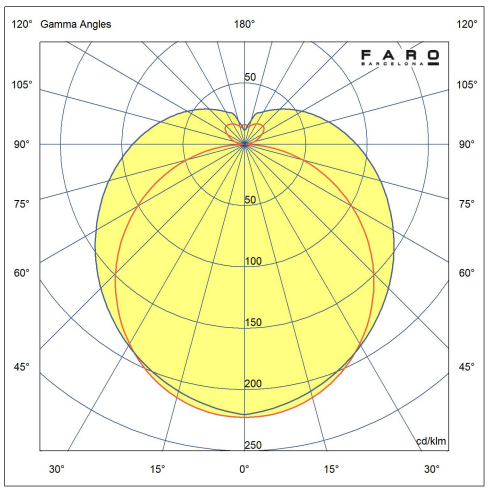

DANUBIO 395 Chrome wall lamp 12W

Ref. 63601

IP44





Mounting	Wall, Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	12
Energy class light source	D
Light source	SMD LED
Lifespan	50.000h L70 B50
Power factor	0.89
Luminous Flux (lm)	780
Color temperature (K)	2700K
Opening angle degrees	160
Light orientation	Direct
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	300 mA
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Chrome
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



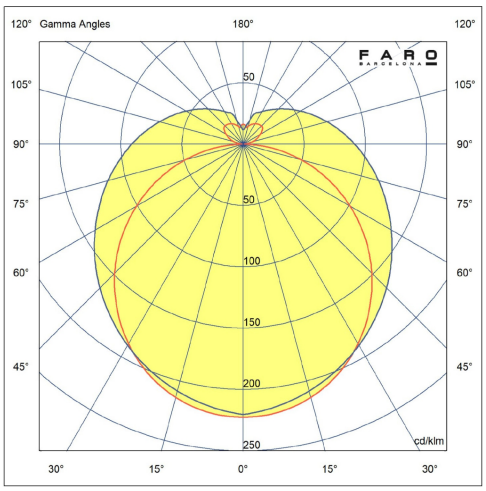

FARO
BARCELONA

DANUBIO 395 Chrome wall lamp 12W
Ref. 63601



DANUBIO 575 Chrome wall lamp 18W

Ref. 63602

IP44





Mounting	Wall, Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	18
Energy class light source	D
Light source	SMD LED
Lifespan	50.000h L70 B50
Power factor	0.93
Luminous Flux (lm)	1368
Color temperature (K)	2700K
Opening angle degrees	160
Light orientation	Direct
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	300 mA
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Chrome
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



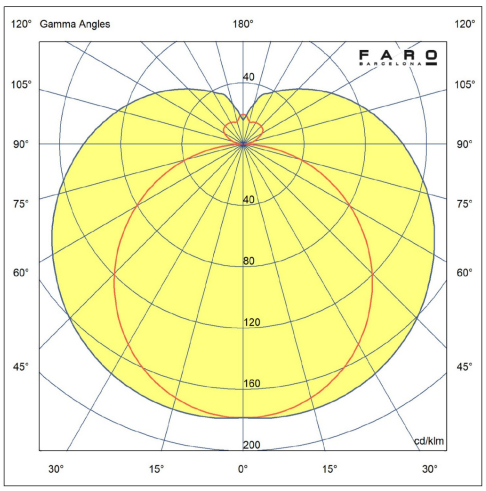

DANUBIO 575 Bronze wall lamp 18W
Ref. 63605

IP44



Mounting	Wall, Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	18
Energy class light source	D
Light source	SMD LED
Lifespan	50.000h L70 B50
Power factor	0.93
Luminous Flux (lm)	1368
Color temperature (K)	2700K
Opening angle degrees	160
Light orientation	Direct
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	300 mA
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Bronze
Diffuser finish	Opal

Installation instructions

Energy label

Photometric

