DART SQ White recessed lamp 2700K
Ref. 70272

IK06 IP65





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	65
IK	06
Power (W)	2
Energy class light source	G
Light source	SMD LED
Luminous Flux (lm)	86
Color temperature (K)	2700K
Opening angle degrees	100
CRI	>80
Structure material	PC
Diffuser material	Glass
Structure finish	Matt White
Diffuser finish	Transparent
Cut-out Size for Recessed Mount	ø68
Maximum Ceiling Thickness (mm)	36
Includes recessed box	No

Installation instructions

Energy label


Photometric



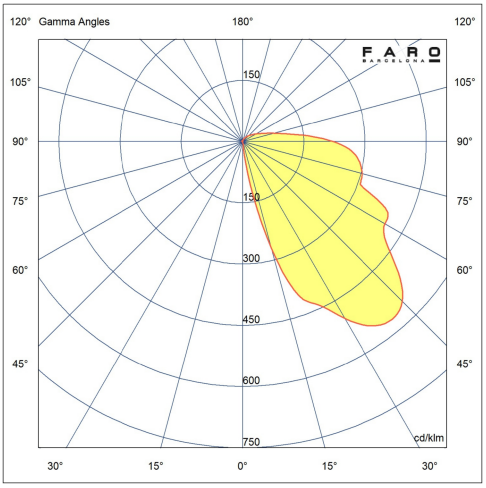

DART SQ White recessed lamp 2700K
Ref. 70272

Related accessories



DART SQ Recessed box

Reference	70276
Structure material	PC

FARO
BARCELONA

DART SQ White recessed lamp 2700K

Ref. 70272



DART SQ Black recessed lamp 2700K
Ref. 70273

IK06 IP65





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	65
IK	06
Power (W)	2
Energy class light source	G
Light source	SMD LED
Luminous Flux (lm)	86
Color temperature (K)	2700K
Opening angle degrees	100
CRI	>80
Structure material	PC
Diffuser material	Glass
Structure finish	Matt Black
Diffuser finish	Transparent
Cut-out Size for Recessed Mount	ø68
Maximum Ceiling Thickness (mm)	36
Includes recessed box	No

Installation instructions

Energy label


Photometric



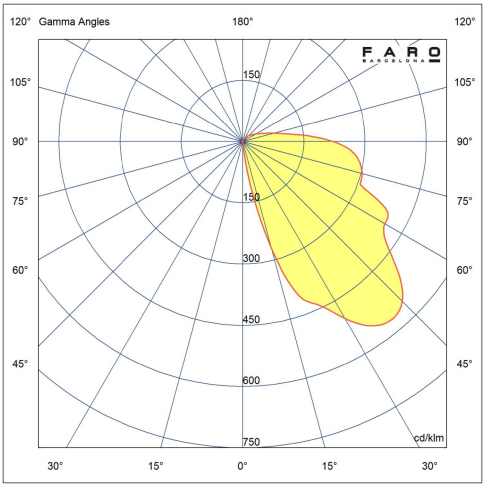

DART SQ Black recessed lamp 2700K
Ref. 70273

Related accessories



DART SQ Recessed box

Reference	70276
Structure material	PC

DART SQ Black recessed lamp 3000K
Ref. 70273n

IK06 IP65





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	65
IK	06
Power (W)	2
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	83
Color temperature (K)	3000K
Opening angle degrees	100
CRI	>80
Structure material	PC
Diffuser material	Glass
Structure finish	Matt Black
Diffuser finish	Transparent
Cut-out Size for Recessed Mount	ø68
Maximum Ceiling Thickness (mm)	36
Includes recessed box	Yes

Installation instructions


Energy label

Photometric



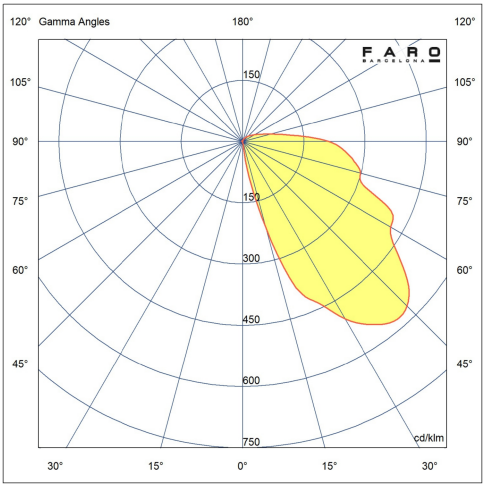


Related accessories



DART SQ Recessed box

Reference	70276
Structure material	PC

DART SQ Recessed box
Ref. 70276

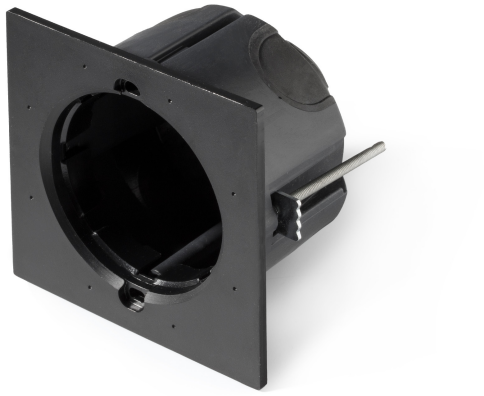

Photobiological risk	1
Structure material	PC
Structure finish	Black
Cut-out Size for Recessed Mount	ø68

Installation instructions