DOP White recessed lamp 8W 3000K
Ref. 44004

IP54



Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	54
Power (W)	8
Energy class light source	G
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.59
Luminous Flux (lm)	712
Color temperature (K)	3000K
Opening angle degrees	85
Light orientation	Direct
Photobiological risk	2
CRI	90
Suitable for seaside areas	No
Control System	On/off
Supply current	200 mA
Structure material	Aluminium
Diffuser material	PC
Structure finish	White
Diffuser finish	Opal
Cut-out Size for Recessed Mount	ø75
Minimum Recessed Height (mm)	60
Maximum Ceiling Thickness (mm)	10


Installation instructions

Energy label

Photometric





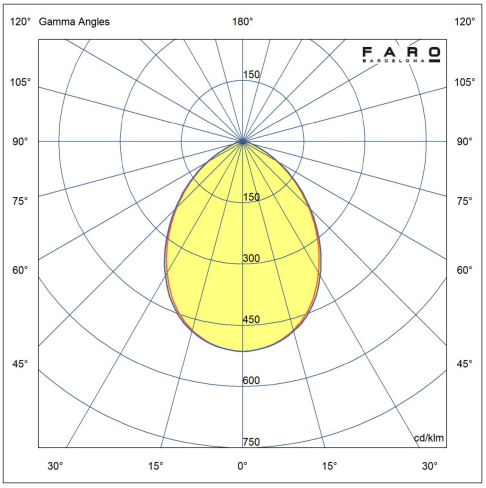

DOP White recessed lamp 8W 3000K
Ref. 44004

DOP White recessed lamp 15W 3000K
Ref. 44006

IP54



Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	54
Power (W)	15
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.61
Luminous Flux (lm)	1335
Color temperature (K)	3000K
Opening angle degrees	85
Light orientation	Direct
Photobiological risk	2
CRI	90
Suitable for seaside areas	No
Control System	On/off
Supply current	350 mA
Structure material	Aluminium
Diffuser material	PC
Structure finish	White
Diffuser finish	Opal
Cut-out Size for Recessed Mount	ø95
Minimum Recessed Height (mm)	68
Maximum Ceiling Thickness (mm)	10


Installation instructions

Energy label

Photometric






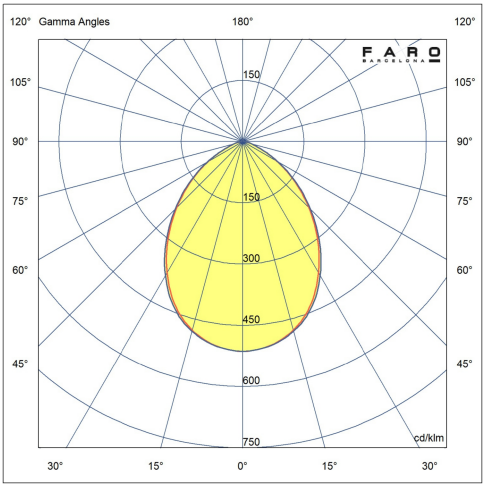

DOP White recessed lamp 33W 3000K
Ref. 44008

IP54








Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	54
Power (W)	33
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.96
Luminous Flux (lm)	2700
Color temperature (K)	3000K
Opening angle degrees	85
Light orientation	Direct
Photobiological risk	2
CRI	90
Suitable for seaside areas	No
Control System	On/off
Supply current	800 mA
Structure material	Aluminium
Diffuser material	PC
Structure finish	White
Diffuser finish	Opal
Cut-out Size for Recessed Mount	ø145
Minimum Recessed Height (mm)	83
Maximum Ceiling Thickness (mm)	10

Installation instructions

Energy label

Photometric

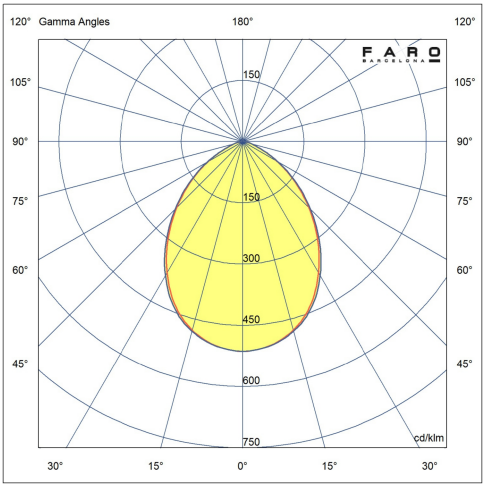

DOP White recessed lamp 8W 2700K
Ref. 44003

IP54



Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	54
Power (W)	8
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.59
Luminous Flux (lm)	676
Color temperature (K)	2700K
Opening angle degrees	85
Light orientation	Direct
Photobiological risk	0
CRI	90
Suitable for seaside areas	No
Control System	On/off
Supply current	200 mA
Structure material	Aluminium
Diffuser material	PC
Structure finish	White
Diffuser finish	Opal
Cut-out Size for Recessed Mount	ø75
Minimum Recessed Height (mm)	60
Maximum Ceiling Thickness (mm)	10


Installation instructions

Energy label

Photometric





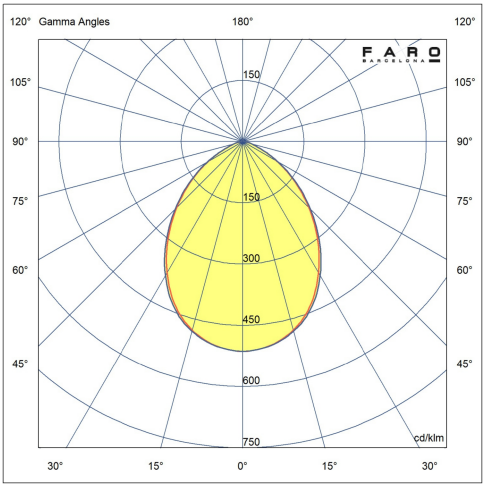

FARO
BARCELONA

DOP White recessed lamp 8W 2700K
Ref. 44003



DOP White recessed lamp 15W 2700K
Ref. 44005

IP54








Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	54
Power (W)	15
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.61
Luminous Flux (lm)	1268
Color temperature (K)	2700K
Opening angle degrees	85
Light orientation	Direct
Photobiological risk	0
CRI	90
Suitable for seaside areas	No
Control System	On/off
Supply current	350 mA
Structure material	Aluminium
Diffuser material	PC
Structure finish	White
Diffuser finish	Opal
Cut-out Size for Recessed Mount	ø95
Minimum Recessed Height (mm)	68
Maximum Ceiling Thickness (mm)	10

Installation instructions

Energy label

Photometric

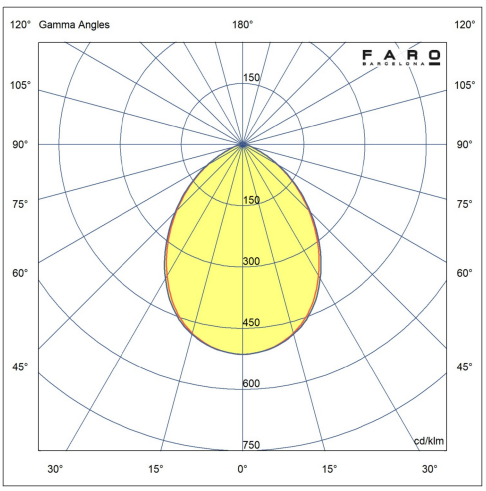

DOP White recessed lamp 33W 2700K
Ref. 44007

IP54



Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	54
Power (W)	33
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.96
Luminous Flux (lm)	2565
Color temperature (K)	2700K
Opening angle degrees	85
Light orientation	Direct
Photobiological risk	0
CRI	90
Suitable for seaside areas	No
Control System	On/off
Supply current	800 mA
Structure material	Aluminium
Diffuser material	PC
Structure finish	White
Diffuser finish	Opal
Cut-out Size for Recessed Mount	ø145
Minimum Recessed Height (mm)	83
Maximum Ceiling Thickness (mm)	10

Installation instructions

Energy label

Photometric

