
DORO 220 Wood wall lamp
Ref. 71899

IK07 IP65

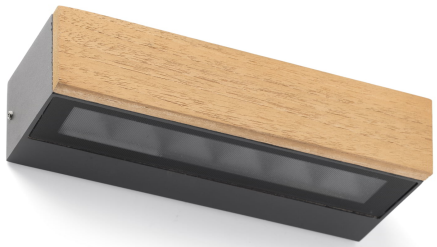



Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	2x6,5
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	2x349
Color temperature (K)	3000K
Light orientation	Direct-Indirect
Suitable for seaside areas	No
Control System	On/off
Structure material	Wood + Aluminium
Diffuser material	Glass
Structure finish	Wood+Dark Grey
Diffuser finish	Prismatic

Installation instructions

Energy label

Photometric



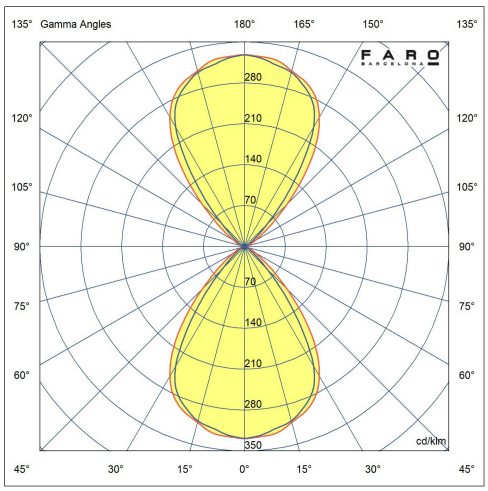

FARO
BARCELONA

DORO 220 Wood wall lamp
Ref. 71899



DORO 220 White wall lamp
Ref. 71900

IK07 IP65





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	2x6,5
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	2x349
Color temperature (K)	3000K
Light orientation	Direct-Indirect
Suitable for seaside areas	No
Control System	On/off
Structure material	Aluminium
Diffuser material	Glass
Structure finish	White
Diffuser finish	Prismatic

Installation instructions

Energy label


Photometric



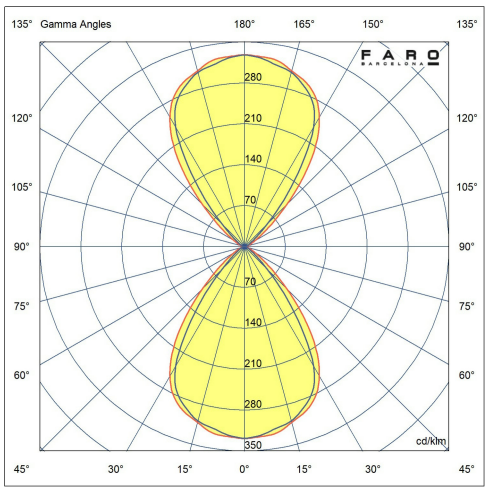

DORO 220 Applique grise foncé
Ref. 71901

IK07 IP65





Fixation	Mur
Tension (V)	220V-240V
Hertz	50/60Hz
Classe	I
IP	65
IK	07
Puissance (W)	2x6,5
Classe énergétique source lumineuse	F
Source lumineuse	SMD LED
Flux lumineux (lm)	2x349
Température de couleur (K)	3000K
Orientation de la lumière	Directe-Indirecte
Adapté pour les zones côtières	Non
Système de contrôle	On/off
Matériau de la structure	Aluminium
Matériau du diffuseur	Verre
Finition de la structure	Gris foncé
Finition du diffuseur	Prismatique

Instructions d'installation

Étiquette énergétique

Photométrique



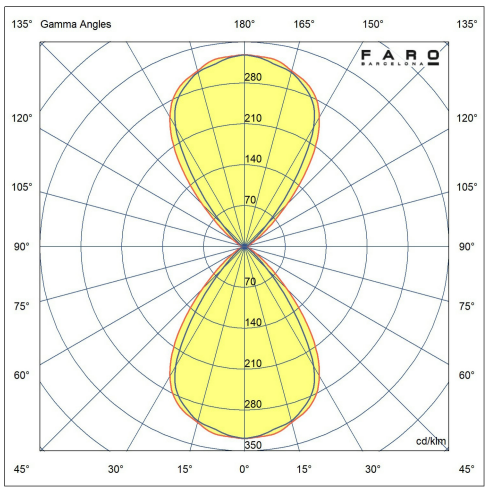

DORO 220 Applique rouille
Ref. 71902

IK07 IP65





Fixation	Mur
Tension (V)	220V-240V
Hertz	50/60Hz
Classe	I
IP	65
IK	07
Puissance (W)	2x6,5
Classe énergétique source lumineuse	F
Source lumineuse	SMD LED
Flux lumineux (lm)	2x349
Température de couleur (K)	3000K
Orientation de la lumière	Directe-Indirecte
Adapté pour les zones côtières	Non
Système de contrôle	On/off
Matériau de la structure	Aluminium
Matériau du diffuseur	Verre
Finition de la structure	Marron rouille
Finition du diffuseur	Prismatique

Instructions d'installation

Étiquette énergétique

Photométrique



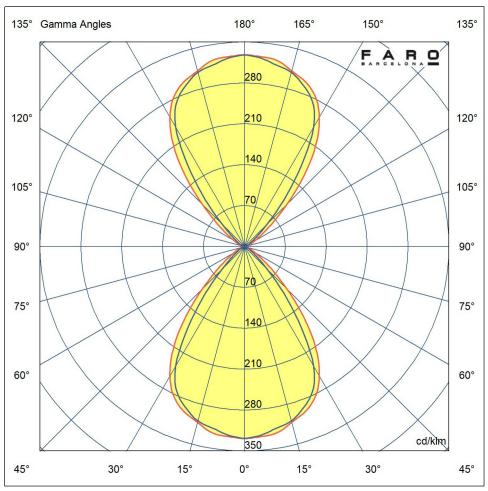

FARO
BARCELONA

DORO 220 Applique rouille
Ref. 71902



DORO 380 Aplique blanco
Ref. 71903

IK07 IP65





Fijación	Pared
Voltaje (V)	220V-240V
Hercios	50/60Hz
Clase	I
IP	65
IK	07
Potencia (W)	2x10
Clase energética fuente de luz	F
Fuente de luz	SMD LED
Flujo luminoso (lm)	2x599
Temperatura de color (K)	3000K
Orientación de la luz	Directa-Indirecta
Apto para zonas marítimas	No
Sistema de control	On/off
Material estructura	Aluminio
Material difusor	Cristal
Acabado estructura	Blanco
Acabado difusor	Prismático

Instrucciones de instalación

Etiqueta energética

Fotométrica



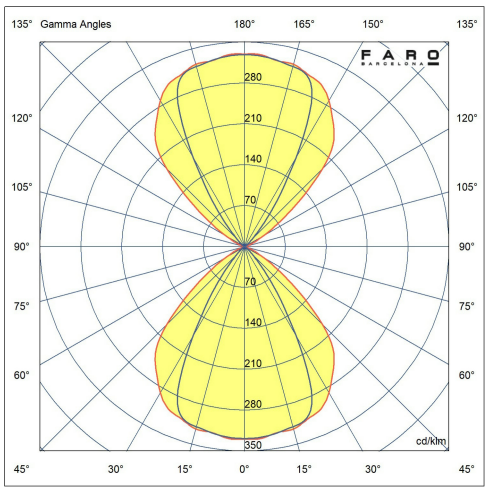

DORO 380 Aplique blanco
Ref. 71903

DORO 380 Dark grey wall lamp
Ref. 71904

IK07 IP65





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	2x10
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	2x599
Color temperature (K)	3000K
Light orientation	Direct-Indirect
Suitable for seaside areas	No
Control System	On/off
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Dark Grey
Diffuser finish	Prismatic

Installation instructions

Energy label

Photometric




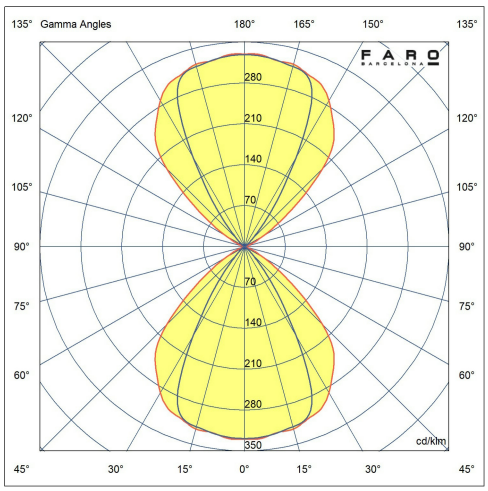

DORO 380 Dark grey wall lamp
Ref. 71904

DORO 380 Rust wall lamp
Ref. 71905

IK07 IP65

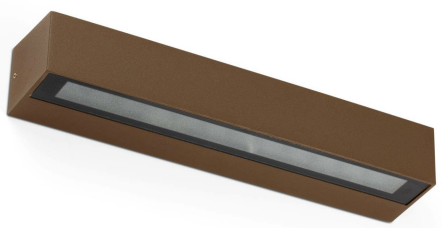



Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	2x10
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	2x599
Color temperature (K)	3000K
Light orientation	Direct-Indirect
Suitable for seaside areas	No
Control System	On/off
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Rust Brown
Diffuser finish	Prismatic

Installation instructions

Energy label

Photometric



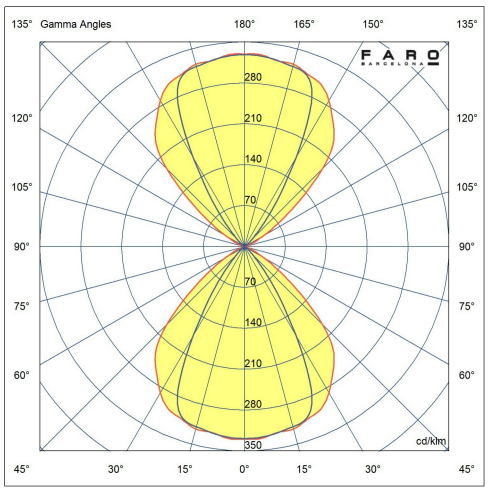

DORO 380 Rust wall lamp
Ref. 71905

DORO 500 White wall lamp
Ref. 71906

IK07 IP65





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	2x14
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	2x744
Color temperature (K)	3000K
Light orientation	Direct-Indirect
Suitable for seaside areas	No
Control System	On/off
Structure material	Aluminium
Diffuser material	Glass
Structure finish	White
Diffuser finish	Prismatic

Installation instructions

Energy label


Photometric



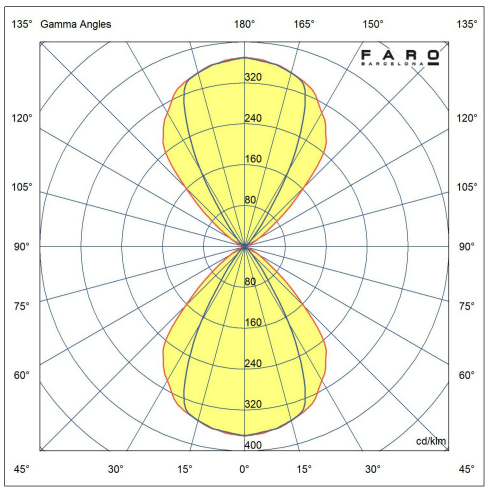

DORO 500 Dark grey wall lamp
Ref. 71907

IK07 IP65

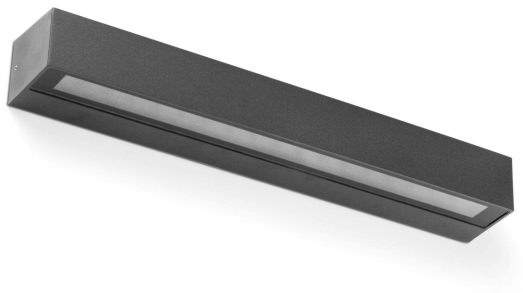



Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	2x14
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	2x744
Color temperature (K)	3000K
Light orientation	Direct-Indirect
Suitable for seaside areas	No
Control System	On/off
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Dark Grey
Diffuser finish	Prismatic

Installation instructions

Energy label

Photometric




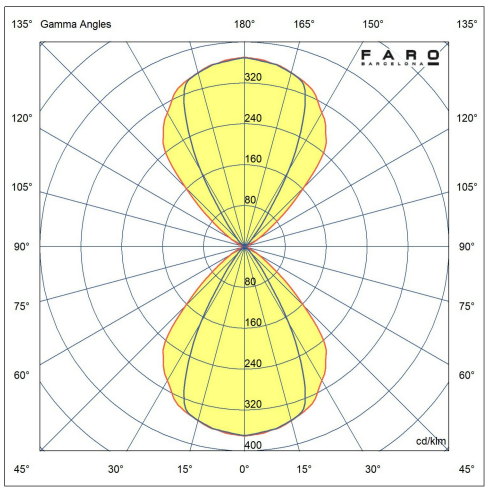

DORO 500 Dark grey wall lamp
Ref. 71907

DORO 500 Rust wall lamp
Ref. 71908

IK07 IP65

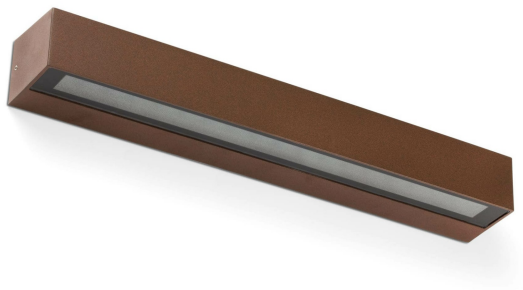



Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	2x14
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	2x744
Color temperature (K)	3000K
Light orientation	Direct-Indirect
Suitable for seaside areas	No
Control System	On/off
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Rust Brown
Diffuser finish	Prismatic

Installation instructions

Energy label

Photometric



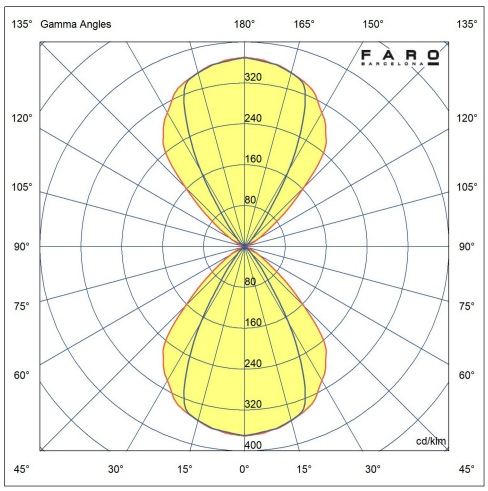

DORO 500 Rust wall lamp
Ref. 71908

