DUAS USB C White wall lamp with reading light

Ref. 68467n |FARO LAB

IP20





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	G
Light source	COB LED
Power factor	0.5
Luminous Flux (lm)	98
Color temperature (K)	2700K
Opening angle degrees	45
Light orientation	Direct
Tilt angles	90
Rotation angles 2	355
Photobiological risk	0
CRI	≥80
Control System	On/off
Supply current	700 mA
Switch type	On/Off
Structure material	Steel
Structure finish	Matt White+Glossy White
Reader finish	Matt White
External device load output	SALIDA USB TIPO C

Installation instructions

Energy label

Photometric



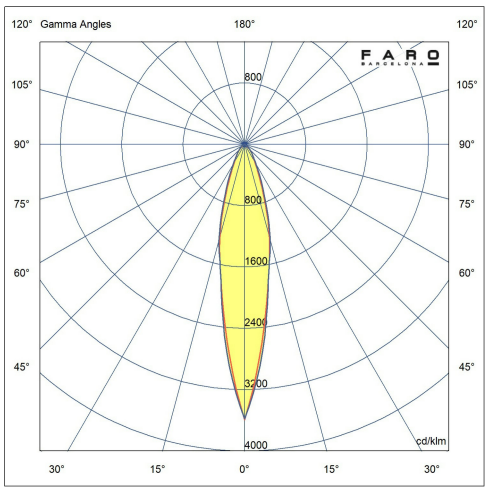

DUAS USB C White wall lamp with reading light
Ref. 68467n |FARO LAB




DUAS USB C Black wall lamp with reading light

Ref. 68468n |FARO LAB

IP20






Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	G
Light source	COB LED
Power factor	0.5
Luminous Flux (lm)	98
Color temperature (K)	2700K
Opening angle degrees	45
Light orientation	Direct
Tilt angles	90
Rotation angles 2	355
Photobiological risk	0
CRI	≥80
Control System	On/off
Supply current	700 mA
Switch type	On/Off
Structure material	Steel
Structure finish	Matt Black+Glossy Black
Reader finish	Matt Black
External device load output	SALIDA USB TIPO C

Installation instructions

Energy label

Photometric

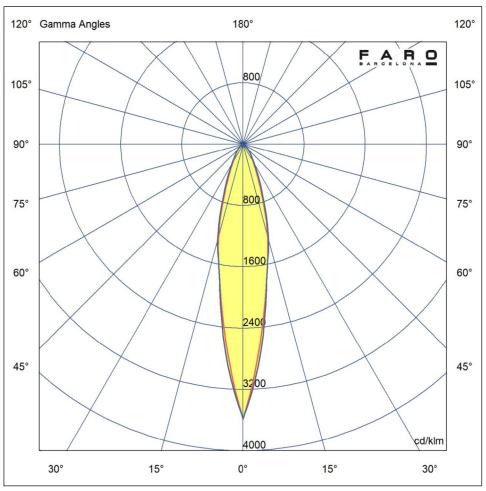

DUAS USB C Black wall lamp with reading light
Ref. 68468n |FARO LAB

