

ESPOT 350 Dark grey bollard lamp
Ref. 71946

IK07 IP65



Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	9
Energy class light source	F
Light source	SMD LED
Lifespan	30.000h L70 B10
Power factor	0.55
Luminous Flux (lm)	1036
Color temperature (K)	2200/ 2700/ 3200/ 4000K
Light orientation	Direct
Photobiological risk	1
CRI	≥80
Suitable for seaside areas	No
Control System	On/off
Supply current	120 mA
Switch type	Push
Structure material	Aluminium
Diffuser material	PC
Structure finish	Dark Grey
Diffuser finish	Transparent
Installation instructions	
Energy label	
Photometric	



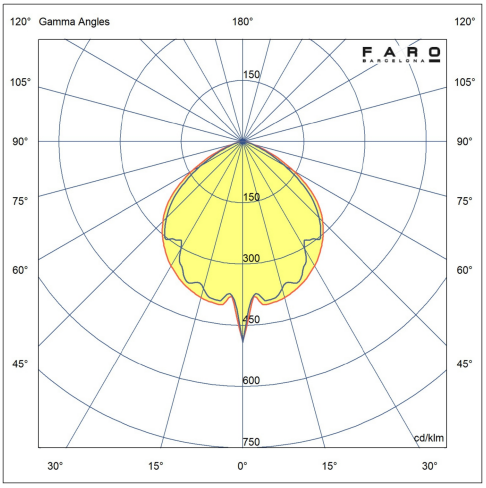

ESPOT 350 Rust bollard lamp
Ref. 71947

IK07 IP65





Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	9
Energy class light source	F
Light source	SMD LED
Lifespan	30.000h L70 B10
Power factor	0.55
Luminous Flux (lm)	1036
Color temperature (K)	2200/ 2700/ 3200/ 4000K
Light orientation	Direct
Photobiological risk	1
CRI	≥80
Suitable for seaside areas	No
Control System	On/off
Supply current	120 mA
Switch type	Push
Structure material	Aluminium
Diffuser material	PC
Structure finish	Rust Brown
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric



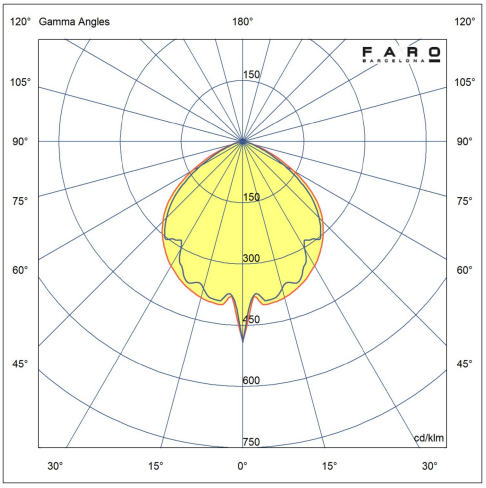

FARO
BARCELONA


ESPOT 350 Rust bollard lamp
Ref. 71947



ESPOT 600 Dark grey bollard lamp
Ref. 71948

IK07 IP65






Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	9
Energy class light source	F
Light source	SMD LED
Lifespan	30.000h L70 B10
Power factor	0.55
Luminous Flux (lm)	1036
Color temperature (K)	2200/ 2700/ 3200/ 4000K
Light orientation	Direct
Photobiological risk	1
CRI	≥80
Suitable for seaside areas	No
Control System	On/off
Supply current	120 mA
Switch type	Push
Structure material	Aluminium
Diffuser material	PC
Structure finish	Dark Grey
Diffuser finish	Transparent

Installation instructions


Energy label

Photometric

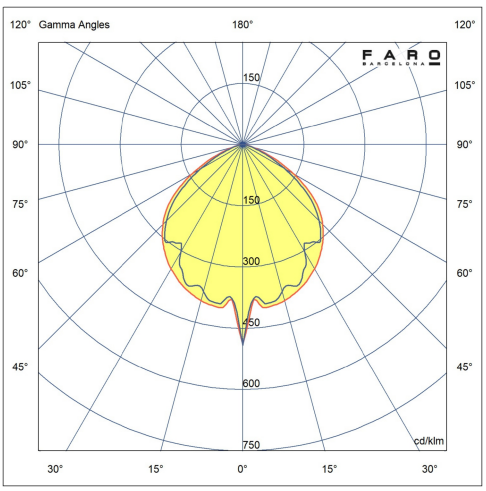

FARO
BARCELONA


ESPOT 600 Dark grey bollard lamp
Ref. 71948

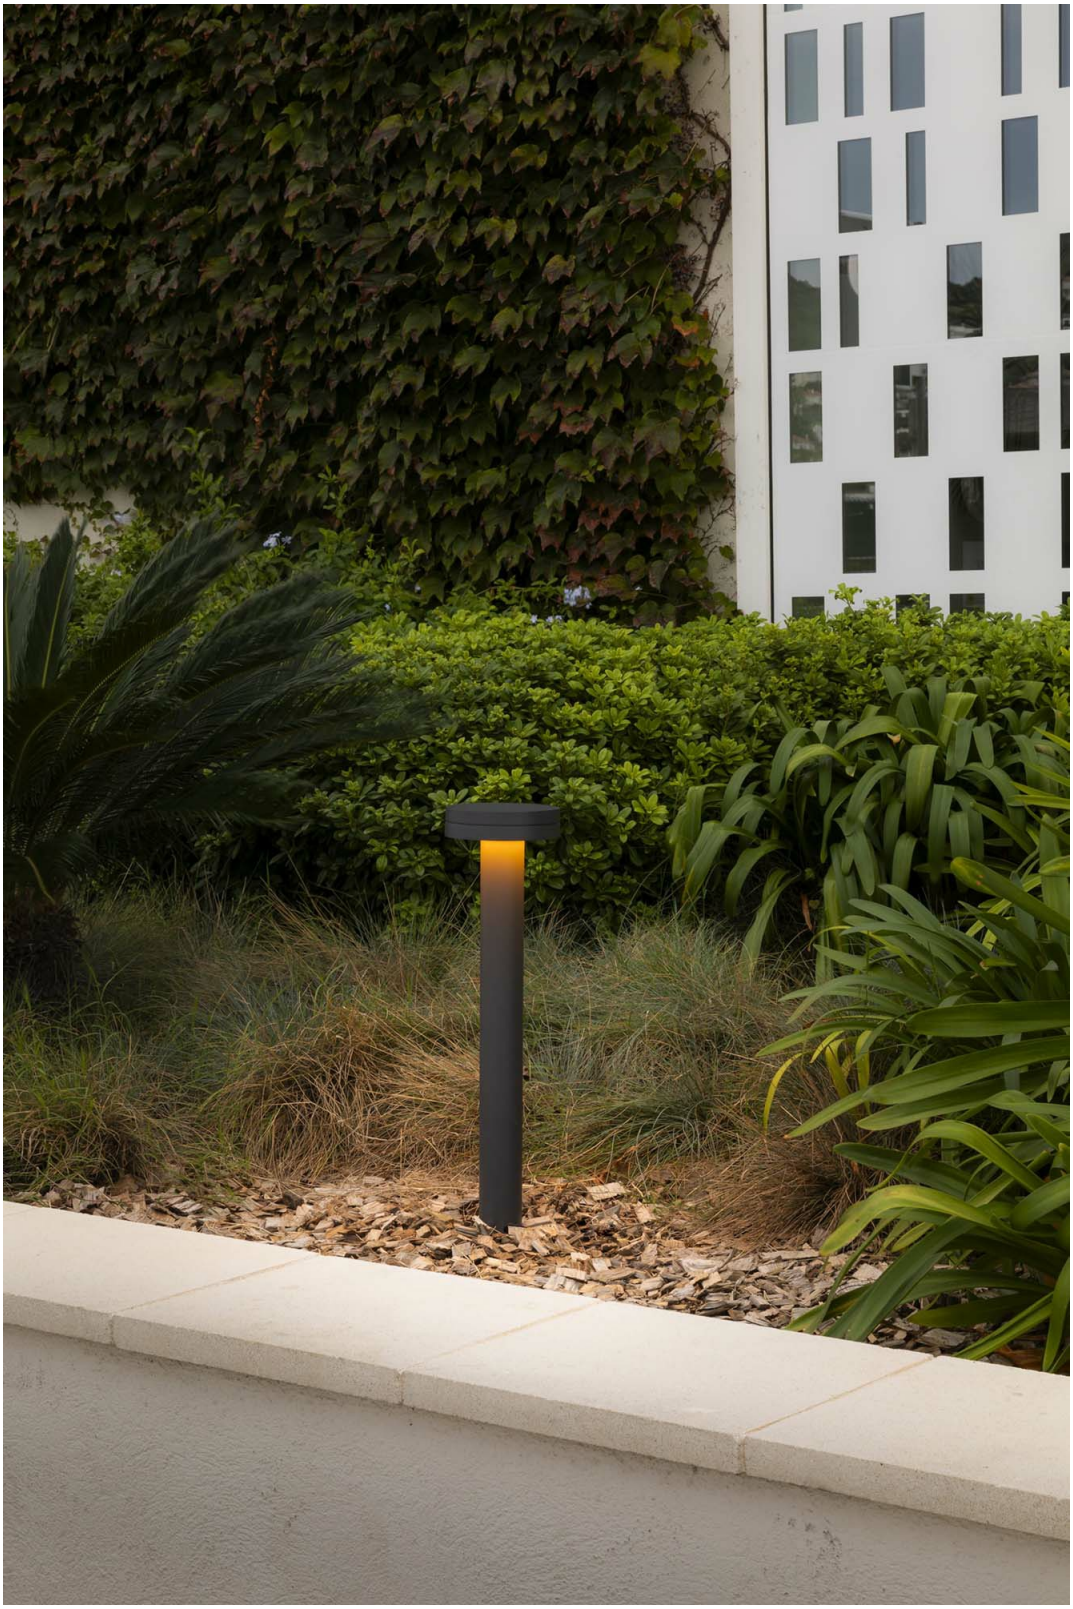

ESPOT 600 Rust bollard lamp
Ref. 71949

IK07 IP65





Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	9
Energy class light source	F
Light source	SMD LED
Lifespan	30.000h L70 B10
Power factor	0.55
Luminous Flux (lm)	1036
Color temperature (K)	2200/ 2700/ 3200/ 4000K
Light orientation	Direct
Photobiological risk	1
CRI	≥80
Suitable for seaside areas	No
Control System	On/off
Supply current	120 mA
Switch type	Push
Structure material	Aluminium
Diffuser material	PC
Structure finish	Rust Brown
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

