GABO White wall lamp reader

Ref. 62753 |FARO LAB

IK05 IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
IK	04
Power (W)	4
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	394
Color temperature (K)	2700K
Opening angle degrees	34
Tilt angles	90
Rotation angles 2	355
Photobiological risk	1
CRI	90
Supply current	350 mA
Switch type	On/Off
Structure material	Steel + Aluminium
Structure finish	Matt White+Textured Black

Installation instructions

Energy label

Photometric



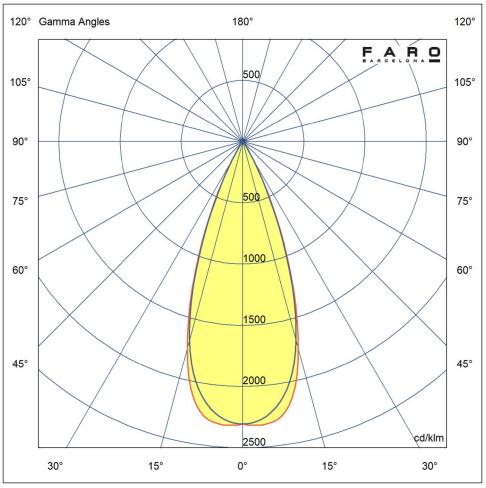

GABO White wall lamp reader
Ref. 62753 |FARO LAB



GABO Black wall lamp reader
Ref. 62754 |FARO LAB

IK05 IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
IK	04
Power (W)	4
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	394
Color temperature (K)	2700K
Opening angle degrees	34
Tilt angles	90
Rotation angles 2	355
Photobiological risk	1
CRI	90
Supply current	350 mA
Switch type	On/Off
Structure material	Steel + Aluminium
Structure finish	Matt Black+Textured Black

Installation instructions

Energy label

Photometric



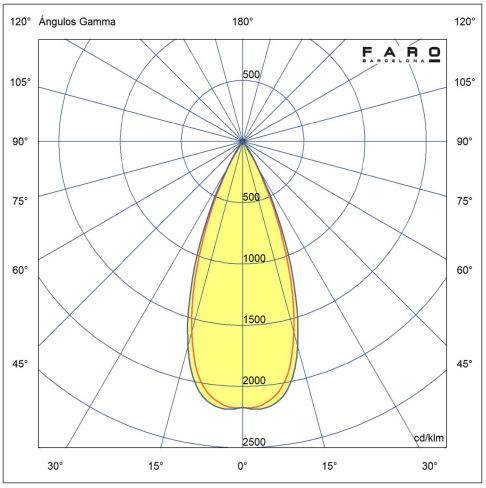

GABO Bronze wall lamp reader

Ref. 62755 |FARO LAB

IK05 IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
IK	04
Power (W)	4
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	394
Color temperature (K)	2700K
Opening angle degrees	34
Tilt angles	90
Rotation angles 2	355
Photobiological risk	1
CRI	90
Supply current	350 mA
Switch type	On/Off
Structure material	Steel + Aluminium
Structure finish	Bronze+Textured Black

Installation instructions

Energy label

Photometric



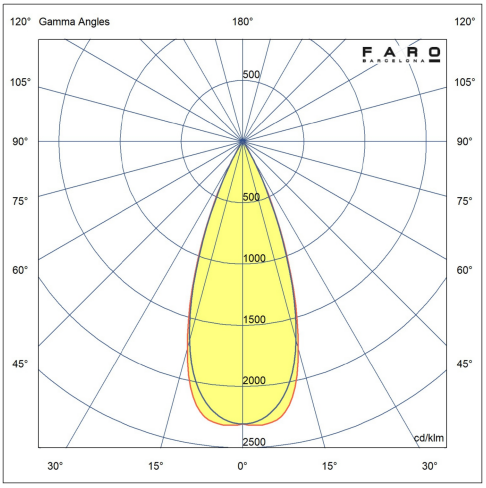

GABO USB C White wall lamp reader

Ref. 62756 |FARO LAB

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	4
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	394
Color temperature (K)	2700K
Opening angle degrees	34
Tilt angles	90
Rotation angles 2	355
CRI	90
Supply current	350 mA
Switch type	On/Off
Structure material	Steel + Aluminium
Structure finish	Matt White+Textured Black
External device load output	SALIDA USB TIPO C

Installation instructions

Energy label

Photometric



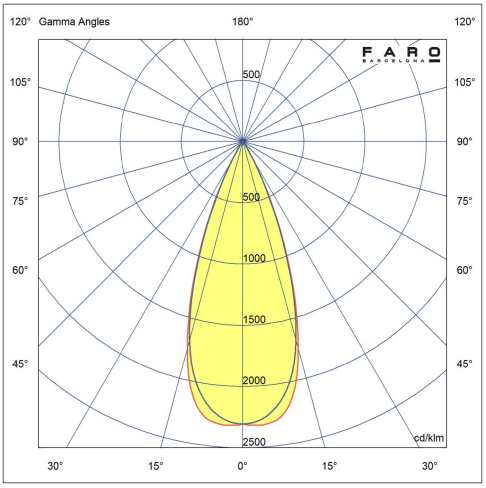

GABO USB C White wall lamp reader
Ref. 62756 |FARO LAB



GABO USB C Black wall lamp reader

Ref. 62757 |FARO LAB

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	4
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	394
Color temperature (K)	2700K
Opening angle degrees	34
Tilt angles	90
Rotation angles 2	355
CRI	90
Supply current	350 mA
Switch type	On/Off
Structure material	Steel + Aluminium
Structure finish	Matt Black+Textured Black
External device load output	SALIDA USB TIPO C

Installation instructions

Energy label

Photometric



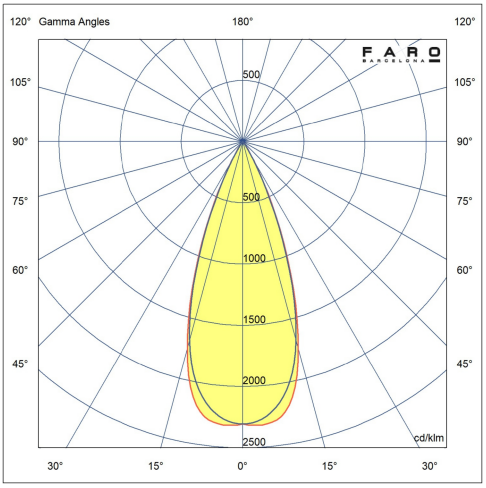

GABO USB C Bronze wall lamp reader

Ref. 62758 |FARO LAB

IP20



Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	4
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	394
Color temperature (K)	2700K
Opening angle degrees	34
Tilt angles	90
Rotation angles 2	355
CRI	90
Supply current	350 mA
Switch type	On/Off
Structure material	Steel + Aluminium
Structure finish	Bronze+Textured Black
External device load output	SALIDA USB TIPO C

Installation instructions

Energy label

Photometric

