GROT 400 Grey bollard lamp 2700K

Ref. 75631 |FARO LAB

IK06 IP55





Mounting	Floor
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	55
IK	06
Power (W)	6,5
Energy class light source	E
Light source	SMD LED
Power factor	0.9
Luminous Flux (lm)	77
Color temperature (K)	2700K
Light orientation	Direct
Photobiological risk	0
CRI	≥80
Suitable for seaside areas	Yes
Control System	On/off
Supply current	200 mA
Structure material	Concrete
Diffuser material	Glass
Structure finish	Grey
Included Accessory	KIT DE FIJACION

Installation instructions

Energy label

Photometric



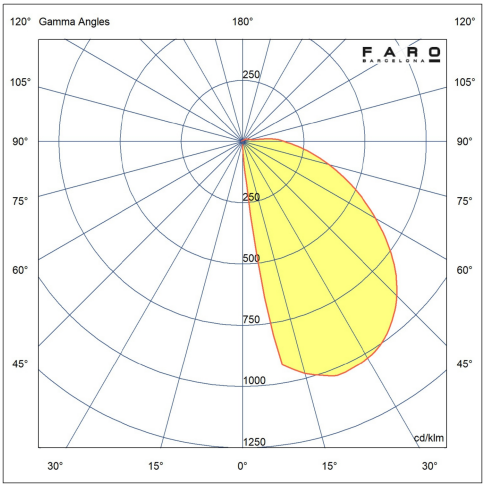


GROT 400 Grey bollard lamp 2700K
Ref. 75631 |FARO LAB



GROT 700 Grey bollard lamp 2700K

Ref. 75632 |FARO LAB

IK06 IP55

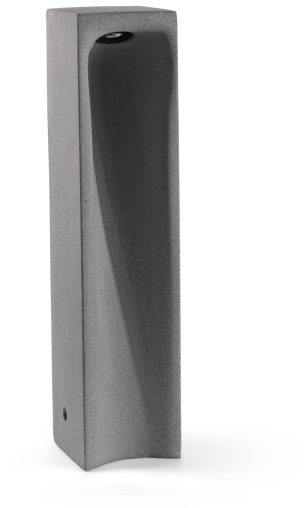



Mounting	Floor
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	55
IK	06
Power (W)	6,5
Energy class light source	E
Light source	SMD LED
Power factor	0.9
Luminous Flux (lm)	77
Color temperature (K)	2700K
Light orientation	Direct
Photobiological risk	0
CRI	≥80
Suitable for seaside areas	Yes
Control System	On/off
Supply current	200 mA
Structure material	Concrete
Diffuser material	Glass
Structure finish	Grey
Included Accessory	KIT DE FIJACION

Installation instructions


Energy label

Photometric



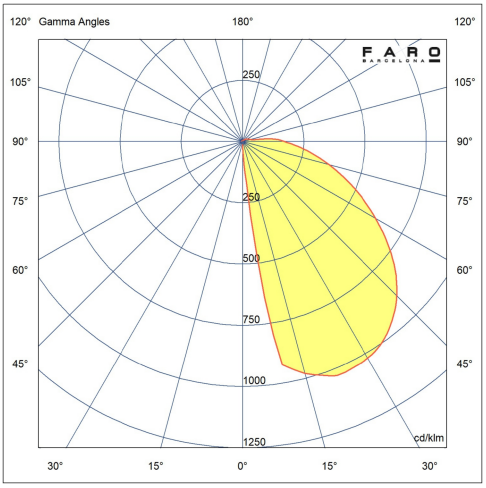

GROT 700 Grey bollard lamp 2700K
Ref. 75632 |FARO LAB

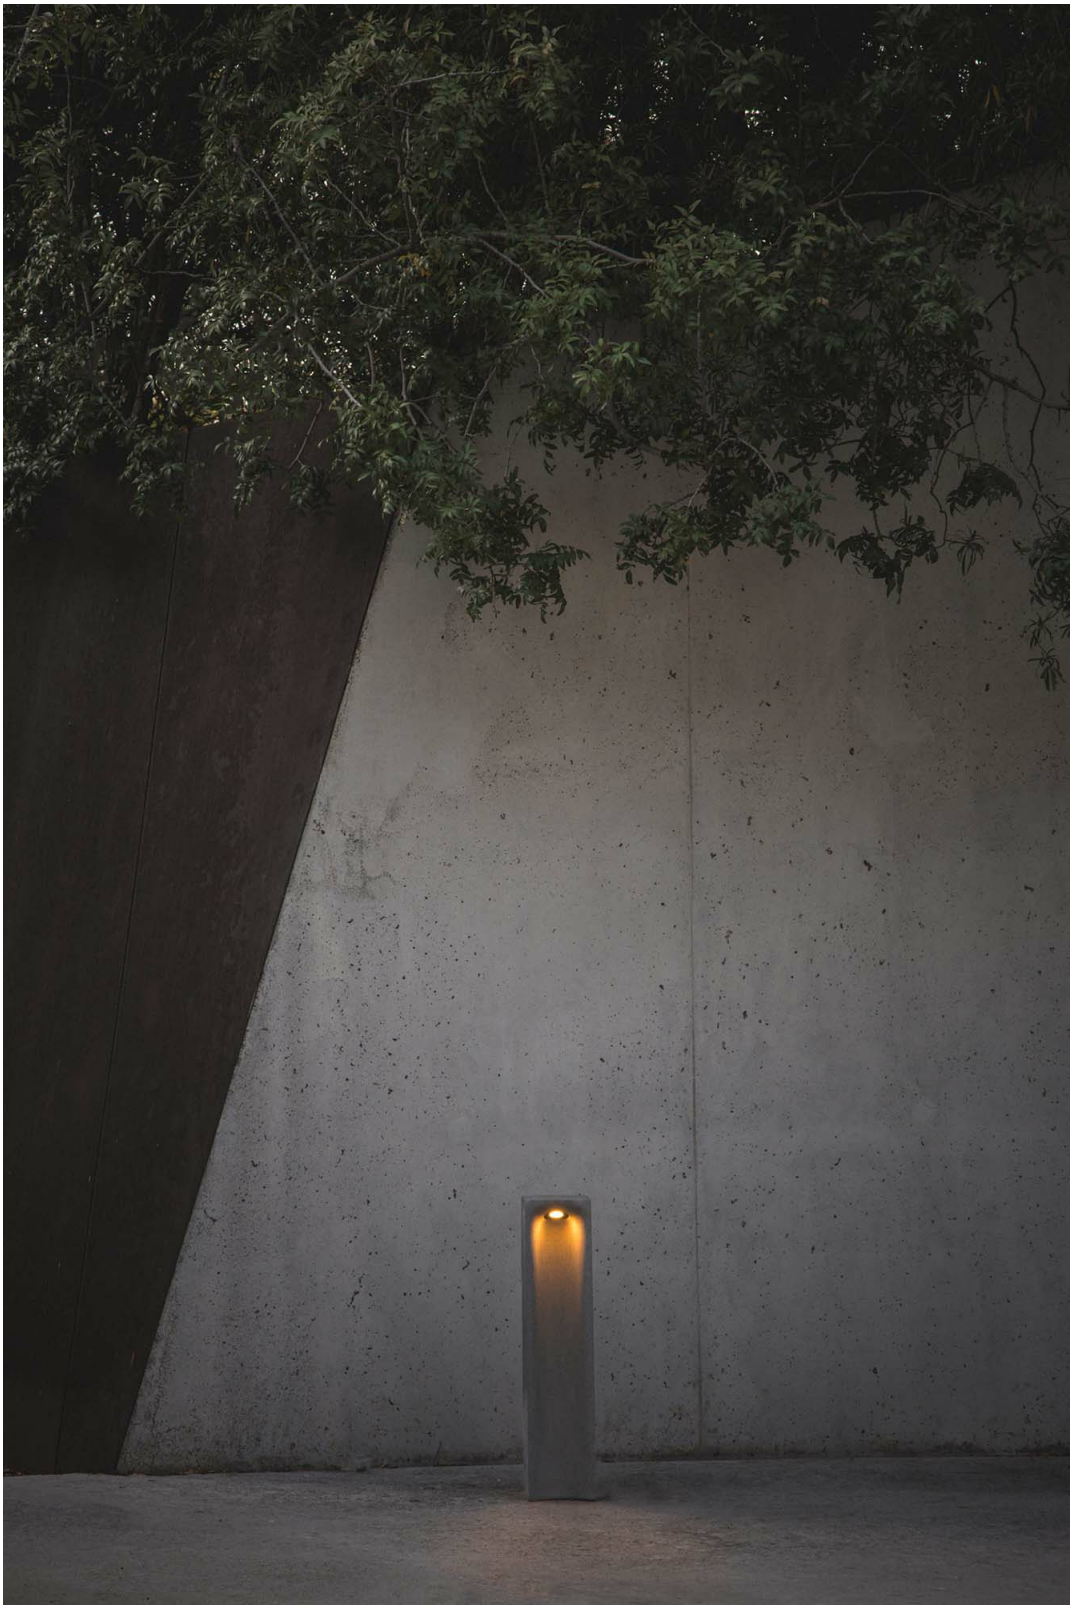

GROT 400 Grey bollard lamp 3000K

Ref. 75634 |FARO LAB

IK06 IP55





Mounting	Floor
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	55
IK	06
Power (W)	6,5
Energy class light source	E
Light source	SMD LED
Power factor	0.9
Luminous Flux (lm)	110
Color temperature (K)	3000K
Light orientation	Direct
Photobiological risk	2
CRI	≥80
Suitable for seaside areas	Yes
Control System	On/off
Supply current	200 mA
Structure material	Concrete
Diffuser material	Glass
Structure finish	Grey
Included Accessory	KIT DE FIJACION

Installation instructions

Energy label

Photometric



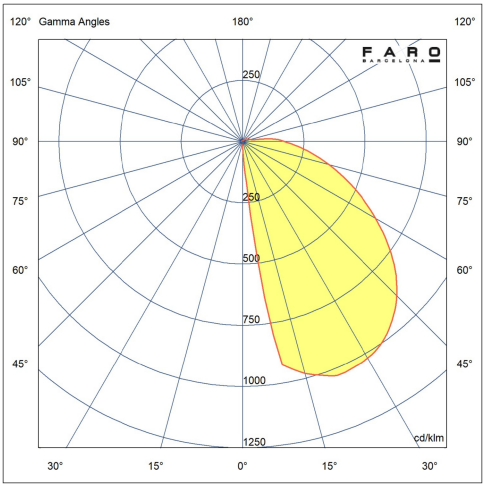

GROT 400 Grey bollard lamp 3000K
Ref. 75634 |FARO LAB



GROT 700 Grey bollard lamp 3000K

Ref. 75635 |FARO LAB

IK06 IP55





Mounting	Floor
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	55
IK	06
Power (W)	6,5
Energy class light source	E
Light source	SMD LED
Power factor	0.9
Luminous Flux (lm)	110
Color temperature (K)	3000K
Light orientation	Direct
Photobiological risk	2
CRI	≥80
Suitable for seaside areas	Yes
Control System	On/off
Supply current	200 mA
Structure material	Concrete
Diffuser material	Glass
Structure finish	Grey
Included Accessory	KIT DE FIJACION

Installation instructions

Energy label

Photometric



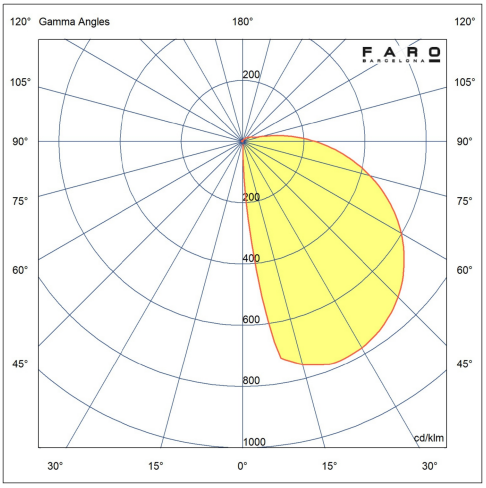

GROT 700 Grey bollard lamp 3000K
Ref. 75635 |FARO LAB

