# KIVA 600 Chrome wall lamp
Ref. 62832

IP44





| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 44 |
| Power (W) | 10 |
| Energy class light source | F |
| Light source | SMD LED |
| Lifespan | 50.000h L70 B50 |
| Power factor | 0.96 |
| Luminous Flux (lm) | 1103 |
| Color temperature (K) | 3000K |
| Opening angle degrees | 160 |
| Light orientation | Direct |
| Photobiological risk | 2 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 700 mA |
| Structure material | Stainless Steel |
| Shade material | PMMA |
| Structure finish | Chrome |
| Shade finish | Translucent |

Installation instructions

Energy label

Photometric



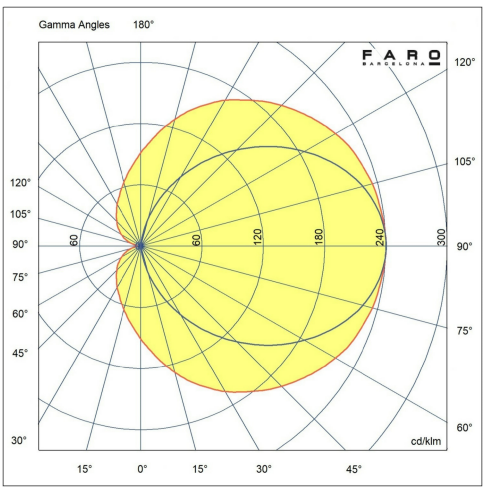FARO
BARCELONA

**KIVA 600 Chrome wall lamp**
Ref. 62832



# KIVA 600 black wall light 10W 2700K
Ref. 62833

IP44





| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 44 |
| Power (W) | 10 |
| Energy class light source | F |
| Light source | SMD LED |
| Lifespan | 50.000h L70 B50 |
| Power factor | 0.96 |
| Luminous Flux (lm) | 1068 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 160 |
| Light orientation | Direct |
| Photobiological risk | 2 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 700 mA |
| Structure material | Stainless Steel |
| Shade material | PMMA |
| Structure finish | Matt Black |
| Shade finish | Translucent |

Installation instructions

Energy label

Photometric


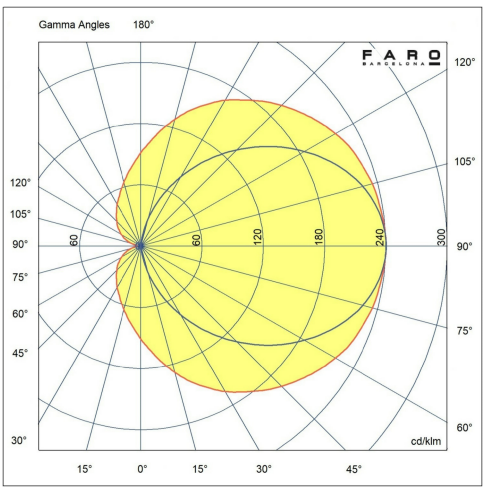
# KIVA 900 Chrome wall lamp
Ref. 62834

IP44





| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 44 |
| Power (W) | 14 |
| Energy class light source | E |
| Light source | SMD LED |
| Lifespan | 50.000h L70 B50 |
| Power factor | 0.95 |
| Luminous Flux (lm) | 1581 |
| Color temperature (K) | 3000K |
| Opening angle degrees | 160 |
| Light orientation | Direct |
| Photobiological risk | 2 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 700 mA |
| Structure material | Stainless Steel |
| Shade material | PMMA |
| Structure finish | Chrome |
| Shade finish | Translucent |

Installation instructions

Energy label

Photometric

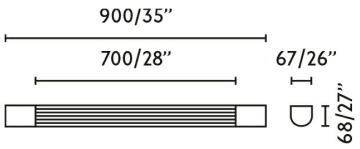

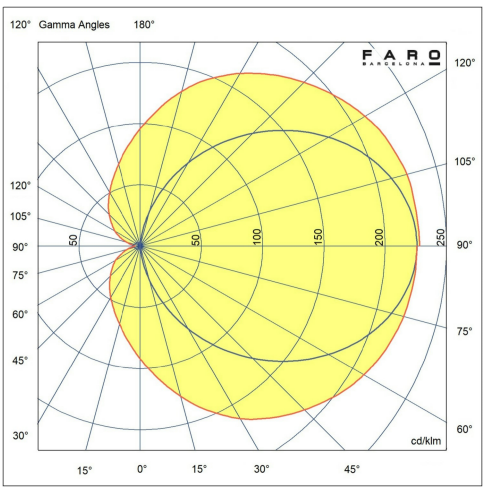
Document generated on 01/10/2026

# KIVA 900 black wall light 14W 2700K
Ref. 62835

IP44





| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 44 |
| Power (W) | 14 |
| Energy class light source | E |
| Light source | SMD LED |
| Lifespan | 50.000h L70 B50 |
| Power factor | 0.95 |
| Luminous Flux (lm) | 1530 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 160 |
| Light orientation | Direct |
| Photobiological risk | 2 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 700 mA |
| Structure material | Stainless Steel |
| Shade material | PMMA |
| Structure finish | Matt Black |
| Shade finish | Translucent |

Installation instructions

Energy label

Photometric

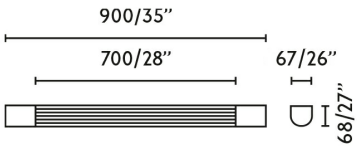

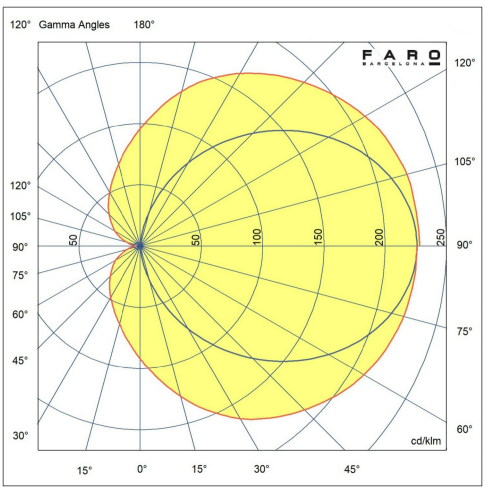**KIVA 900 black wall light 14W 2700K**
Ref. 62835

# KIVA 1200 Chrome wall lamp
Ref. 62836

IP44





| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 44 |
| Power (W) | 18 |
| Energy class light source | F |
| Light source | SMD LED |
| Lifespan | 50.000h L70 B50 |
| Power factor | 0.88 |
| Luminous Flux (lm) | 1852 |
| Color temperature (K) | 3000K |
| Opening angle degrees | 160 |
| Light orientation | Direct |
| Photobiological risk | 2 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 700 mA |
| Structure material | Stainless Steel |
| Shade material | PMMA |
| Structure finish | Chrome |
| Shade finish | Translucent |

Installation instructions

Energy label

Photometric

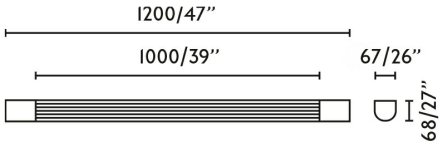

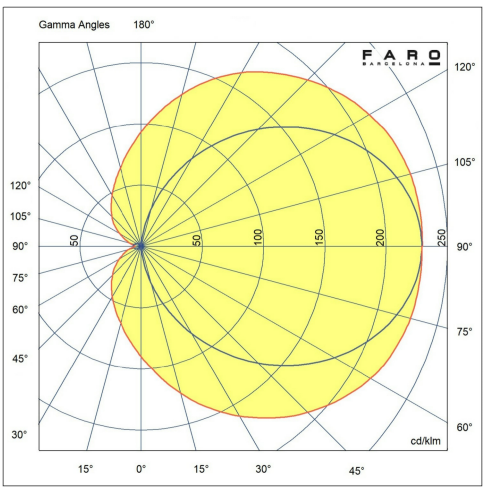FARO
BARCELONA

**KIVA 1200 Chrome wall lamp**
Ref. 62836



# KIVA 1200 black wall light 18W 2700K
Ref. 62837

IP44





| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 44 |
| Power (W) | 18 |
| Energy class light source | F |
| Light source | SMD LED |
| Lifespan | 50.000h L70 B50 |
| Power factor | 0.88 |
| Luminous Flux (lm) | 1792 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 160 |
| Light orientation | Direct |
| Photobiological risk | 2 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 700 mA |
| Structure material | Stainless Steel |
| Shade material | PMMA |
| Structure finish | Matt Black |
| Shade finish | Translucent |

Installation instructions

Energy label

Photometric

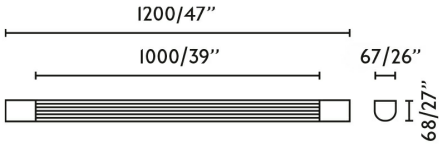

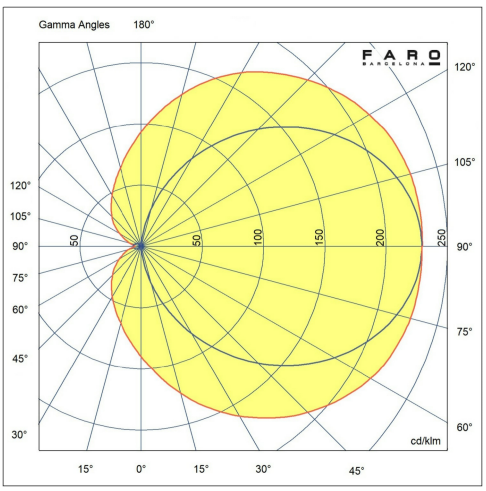**KIVA 1200 black wall light 18W 2700K**
Ref. 62837