LAKO Wood wall lamp
Ref. 71898

IK07 IP65





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	8
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	246
Color temperature (K)	3000K
Opening angle degrees	90
Light orientation	Indirect lighting
CRI	≥80
Structure material	Wood + Aluminium
Diffuser material	Glass
Structure finish	Teak+Dark Grey
Diffuser finish	Prism

Installation instructions

Energy label

Photometric



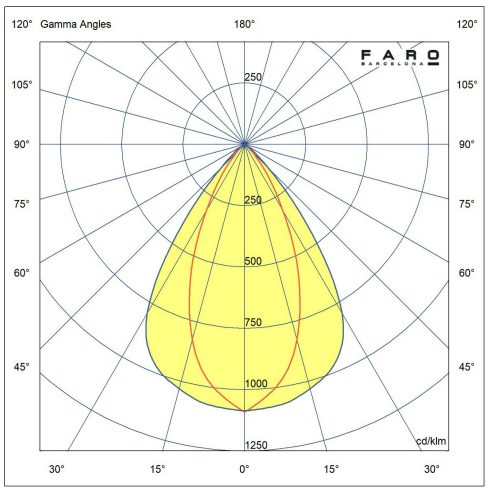

FARO
BARCELONA

LAKO Wood wall lamp
Ref. 71898



Document generated on 02/10/2026

LAKO White wall lamp
Ref. 71909

IK07 IP65





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	8
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	246
Color temperature (K)	3000K
Opening angle degrees	90
Light orientation	Indirect lighting
CRI	>80
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Matt White
Diffuser finish	Prism

Installation instructions

Energy label

Photometric



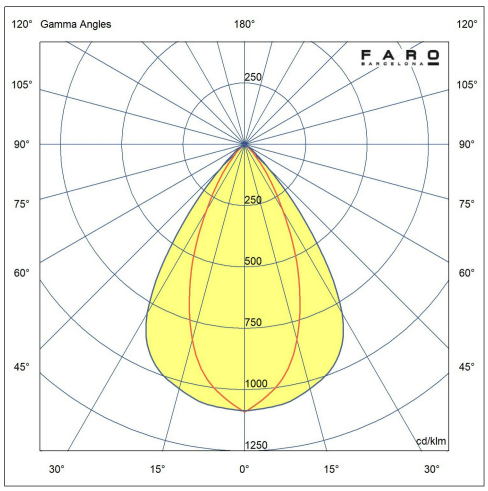


LAKO White wall lamp
Ref. 71909



LAKO Dark grey wall lamp
Ref. 71910

IK07 IP65

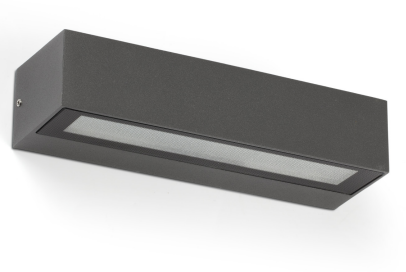



Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	8
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	246
Color temperature (K)	3000K
Opening angle degrees	90
Light orientation	Indirect lighting
CRI	>80
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Dark Grey
Diffuser finish	Prism

Installation instructions

Energy label


Photometric



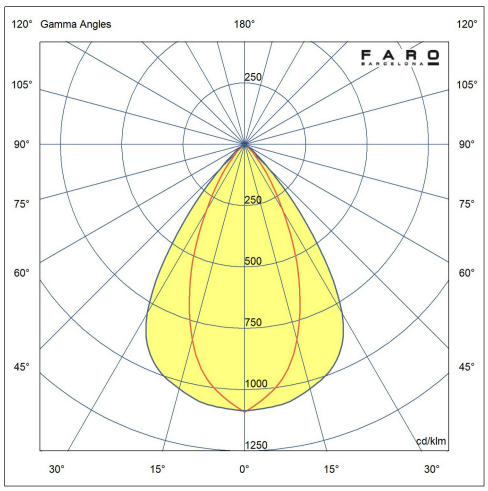

LAKO Rust wall lamp
Ref. 71911

IK07 IP65

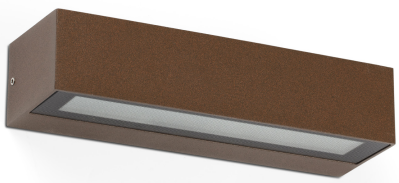

Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	8
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	246
Color temperature (K)	3000K
Opening angle degrees	90
Light orientation	Indirect lighting
CRI	>80
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Rust Brown
Diffuser finish	Prism

Installation instructions

Energy label

Photometric

