
LENA White reading lamp
Ref. 52057

IP20






Mounting	Table lamp
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	G
Light source	SMD LED
Power factor	0.61
Luminous Flux (lm)	296
Color temperature (K)	4000K
Power and lm of intensities (w/lm)	1/40-2/144-4/296 W/lm
Opening angle degrees	85
Light orientation	Direct
Tilt angles	270
Rotation angles 2	360
Photobiological risk	2
UGR	16
CRI	>80
Control System	On/off
Supply current	200 mA
Switch type	Touch
Cable length	1800 mm
Structure material	Aluminium + ABS
Diffuser material	PMMA
Structure finish	Glossy White
Diffuser finish	Translucent
Included Accessory	cargador

Installation instructions

Energy label

Photometric

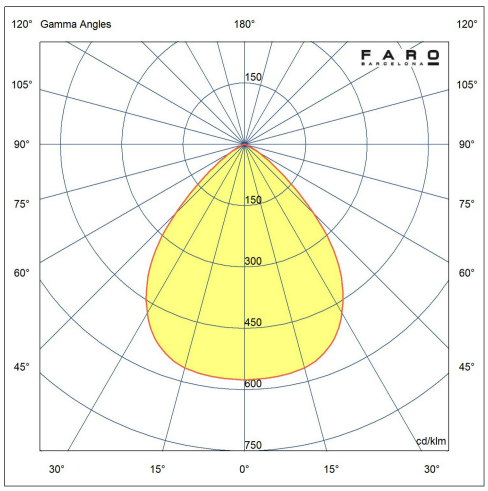

Related accessories




TIDER Black cable management accessory

Reference	20546
Structure material	TPU

LENA Black reading lamp
Ref. 52058

IP20






Mounting	Table lamp
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	G
Light source	SMD LED
Power factor	0.61
Luminous Flux (lm)	296
Color temperature (K)	4000K
Power and lm of intensities (w/lm)	1/40-2/144-4/296 W/lm
Opening angle degrees	85
Light orientation	Direct
Tilt angles	270
Rotation angles 2	360
Photobiological risk	2
UGR	16
CRI	>80
Control System	On/off
Supply current	200 mA
Switch type	Touch
Cable length	1800 mm
Structure material	Aluminium + ABS
Diffuser material	PMMA
Structure finish	Glossy Black
Diffuser finish	Translucent
Included Accessory	cargador

Installation instructions

Energy label

Photometric

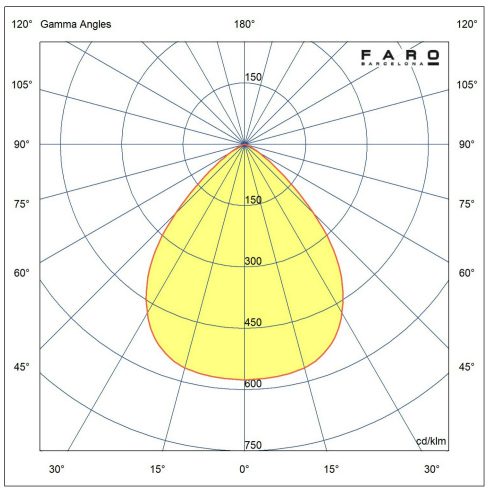

Related accessories



TIDER Black cable management accessory

Reference	20546
Structure material	TPU

FARO
BARCELONA

LENA Black reading lamp
Ref. 52058



Document generated on 07/10/2026