
LINA Black pendant lamp
Ref. 22028

IP20



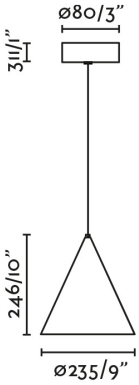


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	12
Energy class light source	G
Light source	LED MODULE
Luminous Flux (lm)	524
Color temperature (K)	2700K
Opening angle degrees	85
CRI	90
Supply current	300 mA
Cable length	1500 mm
Structure material	Aluminium
Shade material	Aluminium
Diffuser material	PC
Structure finish	Black
Diffuser finish	Translucent

Installation instructions

Energy label


Photometric

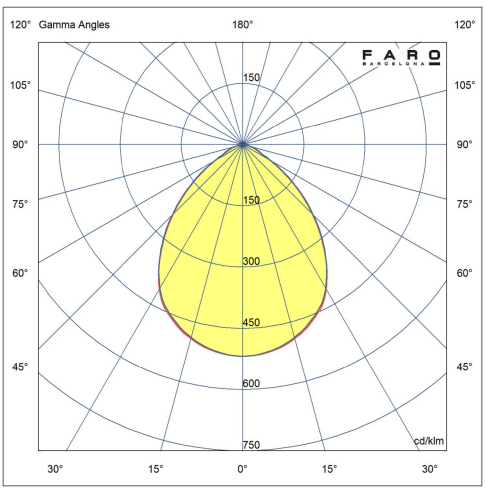

LINA White pendant lamp
Ref. 22029

IP20



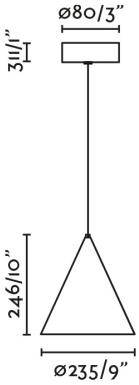


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	12
Energy class light source	G
Light source	LED MODULE
Luminous Flux (lm)	524
Color temperature (K)	2700K
Opening angle degrees	85
CRI	90
Supply current	300 mA
Cable length	1500 mm
Structure material	Aluminium
Shade material	Aluminium
Diffuser material	PC
Structure finish	White
Diffuser finish	Translucent

Installation instructions

Energy label

Photometric

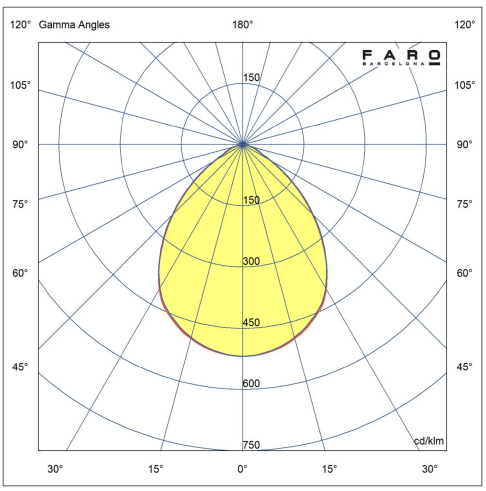

FARO
BARCELONA

LINA White pendant lamp
Ref. 22029

