LOKE chrome wall lamp reader
Ref. 40994

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	D
Light source	HIGH POWER LED
Lifespan	30.000h L70 B10
Power factor	0.4
Luminous Flux (lm)	110
Color temperature (K)	3000K
Opening angle degrees	30
Light orientation	Direct
Rotation angles 1	355
Rotation angles 2	355
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	450 mA
Switch type	On/Off
Structure material	Aluminium + Steel
Diffuser material	Glass
Structure finish	Chrome-Plated
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric




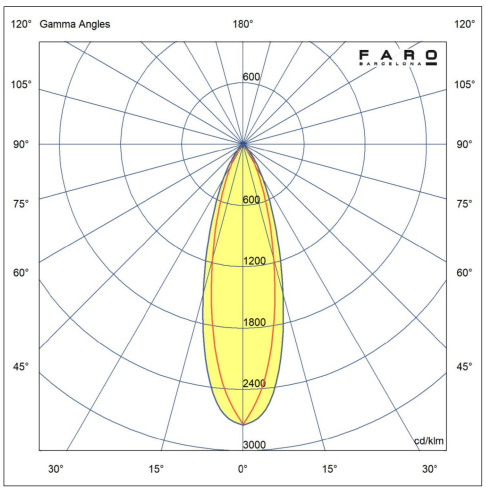

LOKE White wall lamp with reading light
Ref. 41019

IP20






Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	D
Light source	HIGH POWER LED
Lifespan	30.000h L70 B10
Power factor	0.4
Luminous Flux (lm)	110
Color temperature (K)	3000K
Opening angle degrees	30
Light orientation	Direct
Rotation angles 1	355
Rotation angles 2	355
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	450 mA
Switch type	On/Off
Structure material	Aluminium + Steel
Diffuser material	Glass
Structure finish	Matt White
RAL/Pantone structure	RAL 9010
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

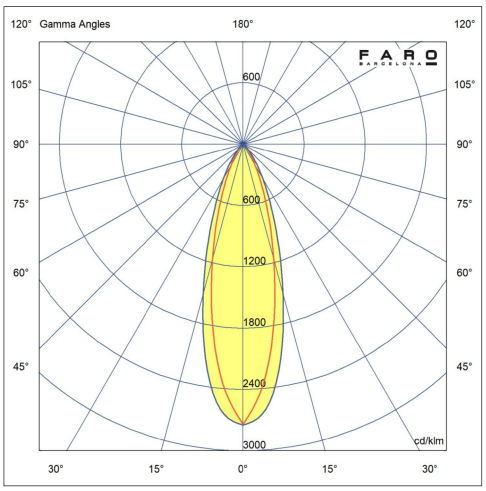

FARO
BARCELONA


LOKE White wall lamp with reading light
Ref. 41019



LOKE Black wall lamp with reading light
Ref. 41020

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	D
Light source	HIGH POWER LED
Lifespan	30.000h L70 B10
Power factor	0.4
Luminous Flux (lm)	110
Color temperature (K)	3000K
Opening angle degrees	30
Light orientation	Direct
Rotation angles 1	355
Rotation angles 2	355
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	450 mA
Switch type	On/Off
Structure material	Aluminium + Steel
Diffuser material	Glass
Structure finish	Matt Black
RAL/Pantone structure	RAL 9011
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

