
MABE Black wall lamp
Ref. 62830





IP44

Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	6
Energy class light source	F
Light source	SMD LED
Lifespan	35.000h
Power factor	0.7
Luminous Flux (lm)	503
Color temperature (K)	3000K
Opening angle degrees	160
Light orientation	Direct
Photobiological risk	0
CRI	>80
Control System	On/off
Supply current	450 mA
Structure material	Stainless Steel
Shade material	Glass
Diffuser material	Glass
Structure finish	Matt Black
Shade finish	Opal
Diffuser finish	Opal


Installation instructions

Energy label

Photometric

FARO
BARCELONA

MABE Black wall lamp
Ref. 62830

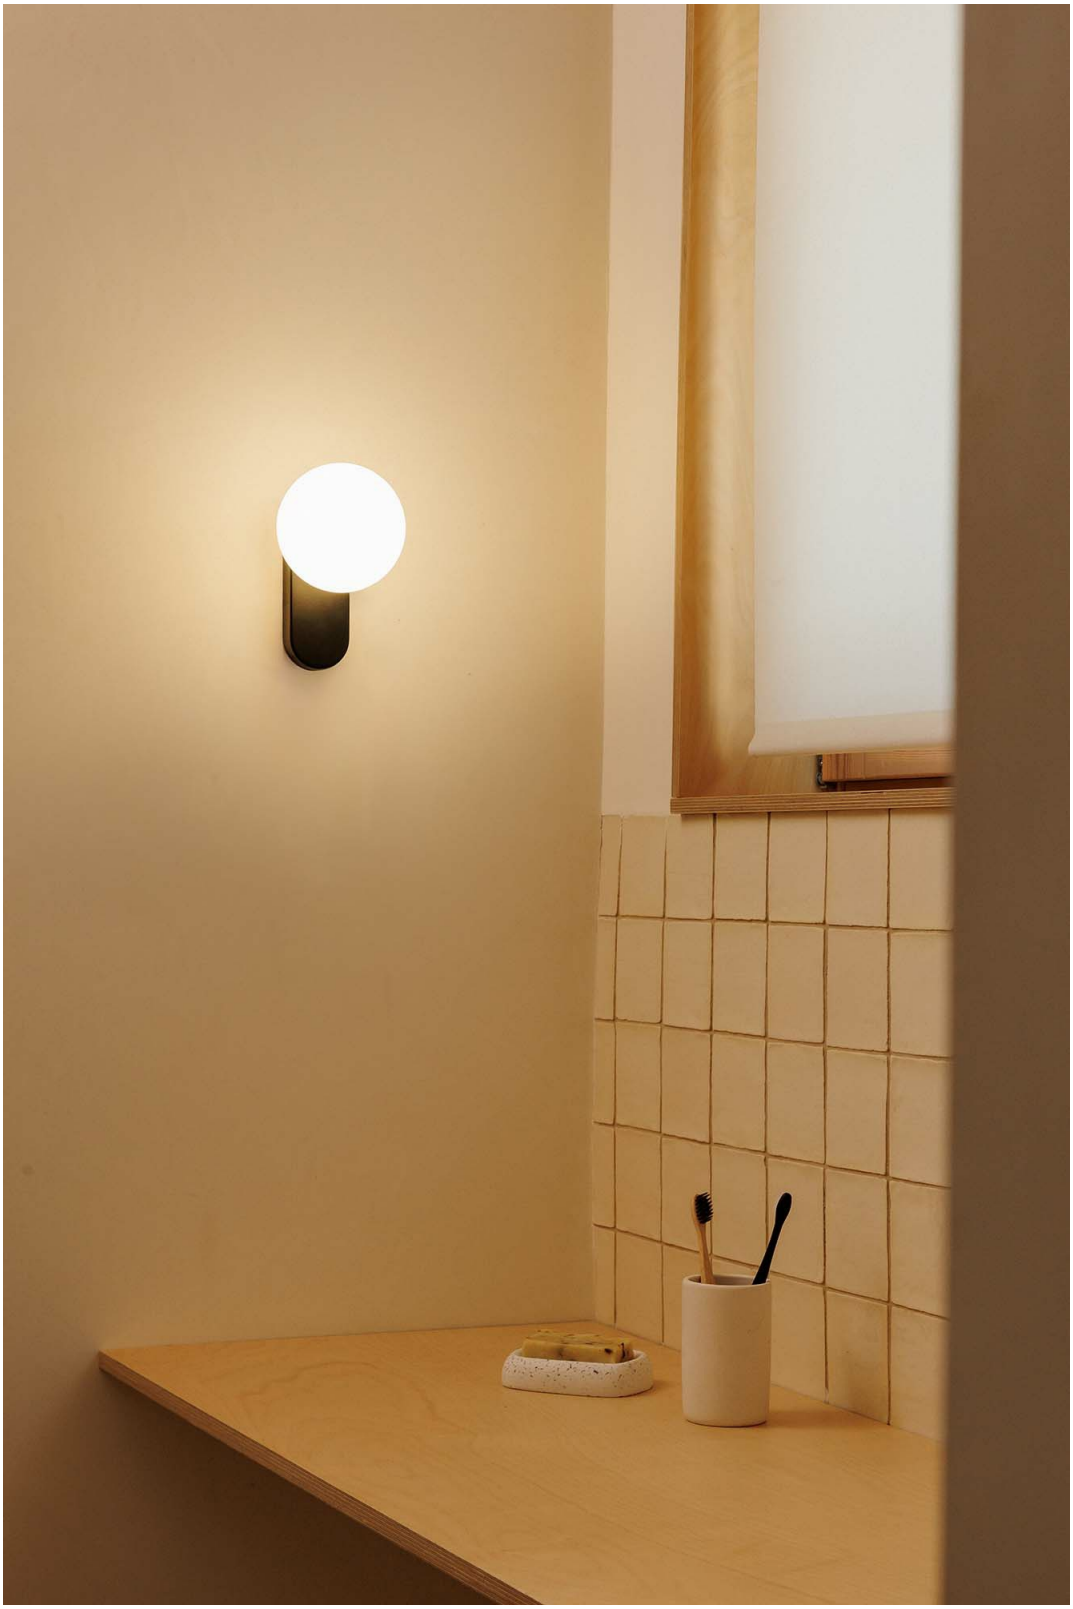

MABE Nickel matte wall lamp
Ref. 62831

IP44





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	6
Energy class light source	F
Light source	SMD LED
Lifespan	35.000h
Power factor	0.7
Luminous Flux (lm)	503
Color temperature (K)	3000K
Opening angle degrees	160
Light orientation	Direct
Photobiological risk	0
CRI	>80
Control System	On/off
Supply current	450 mA
Structure material	Stainless Steel
Shade material	Glass
Diffuser material	Glass
Structure finish	Matt Nickel
Shade finish	Opal
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



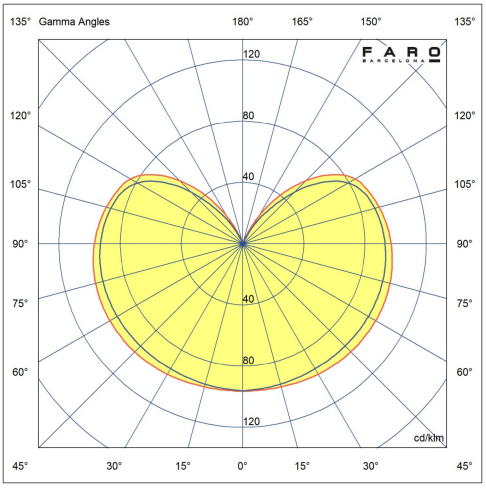

Document generated on 02/10/2026

MABE Nickel matte wall lamp
Ref. 62831