
MAGRITTE 300 Matt nickel picture wall light

Ref. 61080

IP20






Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	6
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.9
Luminous Flux (lm)	325
Color temperature (K)	3000K
Opening angle degrees	110
Light orientation	Direct
Tilt angles	190
Rotation angles 2	180
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	160 mA
Structure material	Aluminium + Steel
Diffuser material	PMMA
Structure finish	Satin Nickel
Diffuser finish	Opal

Installation instructions

Energy label

Photometric

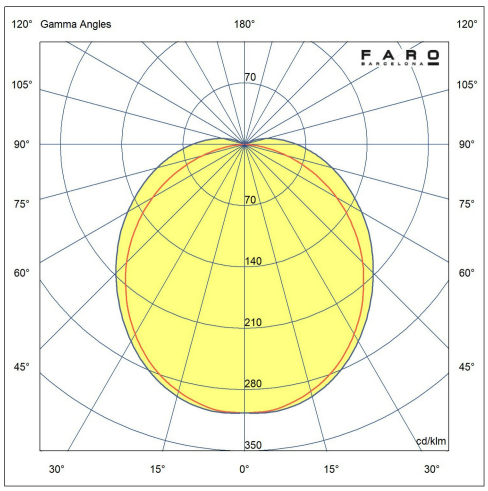


MAGRITTE 450 Matt nickel picture wall light

Ref. 61081

IP20






Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	8
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.9
Luminous Flux (lm)	402
Color temperature (K)	3000K
Opening angle degrees	110
Light orientation	Direct
Tilt angles	190
Rotation angles 2	180
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	200 mA
Structure material	Aluminium + Steel
Diffuser material	PMMA
Structure finish	Satin Nickel
Diffuser finish	Opal

Installation instructions

Energy label

Photometric

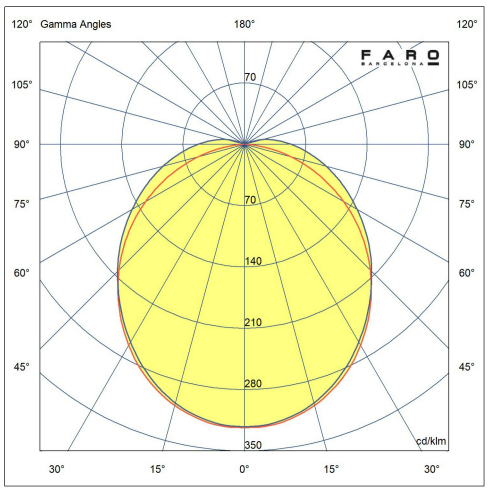



MAGRITTE 600 Matt nickel picture wall light

Ref. 61082

IP20








Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	12
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.9
Luminous Flux (lm)	727
Color temperature (K)	3000K
Opening angle degrees	110
Light orientation	Direct
Tilt angles	190
Rotation angles 2	180
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	300 mA
Structure material	Aluminium + Steel
Diffuser material	PMMA
Structure finish	Satin Nickel
Diffuser finish	Opal

Installation instructions


Energy label

Photometric

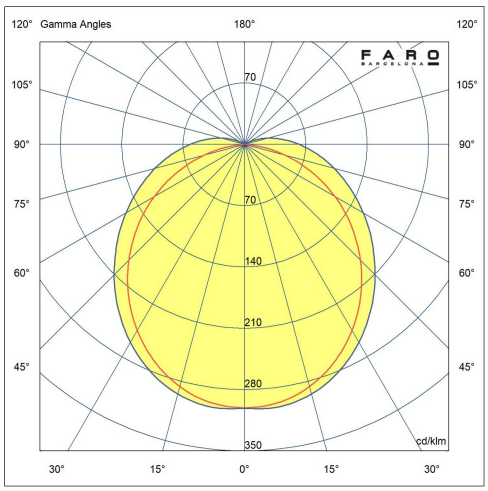

MAGRITTE 300 Old gold picture wall light
Ref. 61083

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	6
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.9
Luminous Flux (lm)	325
Color temperature (K)	3000K
Opening angle degrees	110
Light orientation	Direct
Tilt angles	190
Rotation angles 2	180
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	160 mA
Structure material	Aluminium + Steel
Diffuser material	PMMA
Structure finish	Antique Gold
Diffuser finish	Opal

Installation instructions

Energy label


Photometric




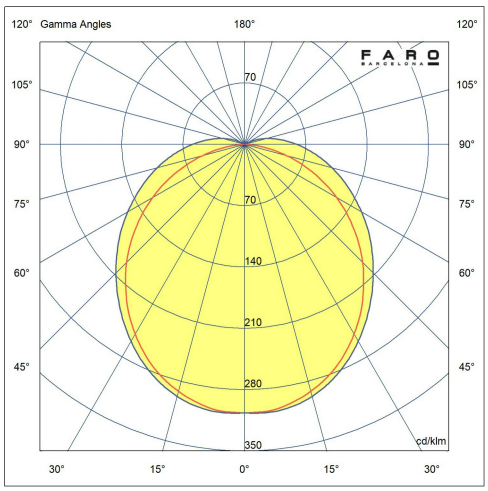

MAGRITTE 450 Old gold picture wall light
Ref. 61084

IP20

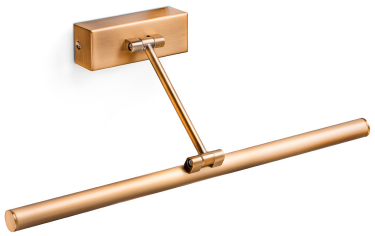




Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	8
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.9
Luminous Flux (lm)	402
Color temperature (K)	3000K
Opening angle degrees	110
Light orientation	Direct
Tilt angles	190
Rotation angles 2	180
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	200 mA
Structure material	Aluminium + Steel
Diffuser material	PMMA
Structure finish	Antique Gold
Diffuser finish	Opal

Installation instructions

Energy label


Photometric

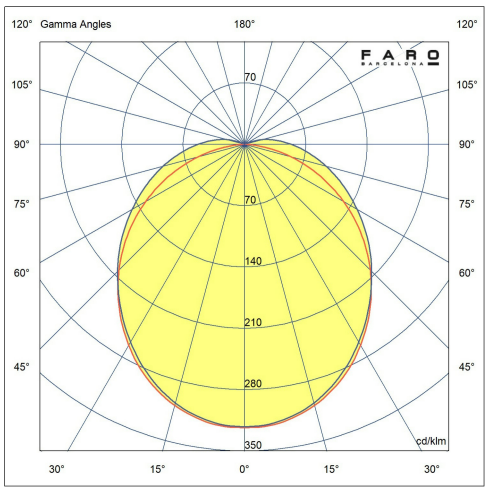



MAGRITTE 450 Old gold picture wall light
Ref. 61084

MAGRITTE 600 Old gold picture wall light
Ref. 61085


IP20

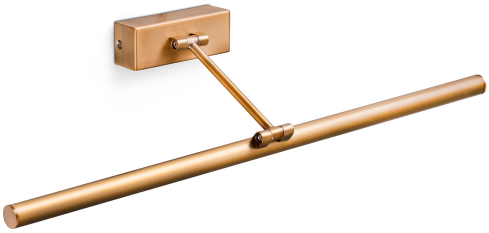






Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	12
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.9
Luminous Flux (lm)	727
Color temperature (K)	3000K
Opening angle degrees	110
Light orientation	Direct
Tilt angles	190
Rotation angles 2	180
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	300 mA
Structure material	Aluminium + Steel
Diffuser material	PMMA
Structure finish	Antique Gold
Diffuser finish	Opal
Installation instructions	
Energy label	
Photometric	

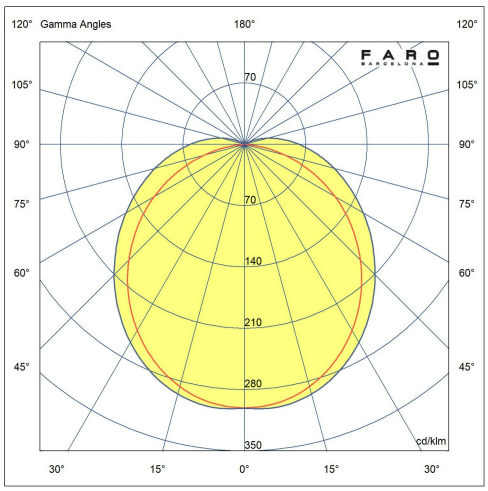

MAGRITTE 300 Black picture wall light
Ref. 61086

IP20





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	6
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.9
Luminous Flux (lm)	325
Color temperature (K)	3000K
Opening angle degrees	110
Light orientation	Direct
Tilt angles	190
Rotation angles 2	180
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	160 mA
Structure material	Aluminium + Steel
Diffuser material	PMMA
Structure finish	Matt Black
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



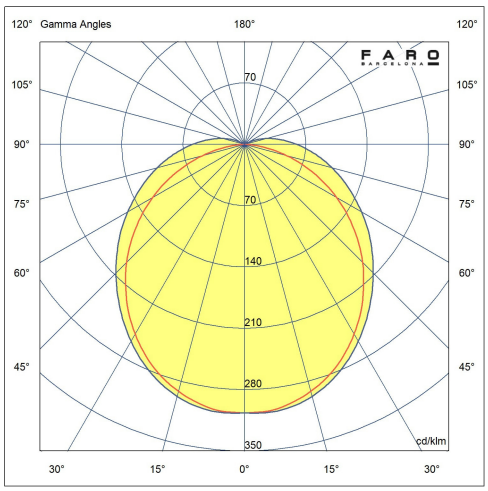

MAGRITTE 300 Black picture wall light
Ref. 61086




MAGRITTE 450 Black picture wall light

Ref. 61087

IP20






Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	8
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.9
Luminous Flux (lm)	402
Color temperature (K)	3000K
Opening angle degrees	110
Light orientation	Direct
Tilt angles	190
Rotation angles 2	180
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	200 mA
Structure material	Aluminium + Steel
Diffuser material	PMMA
Structure finish	Matt Black
Diffuser finish	Opal

Installation instructions

Energy label

Photometric

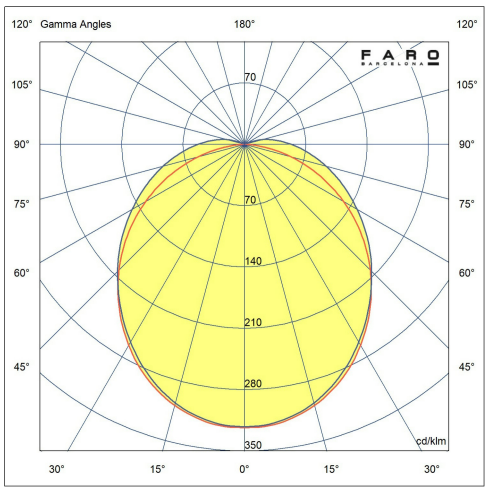

MAGRITTE 600 Black picture wall light

Ref. 61088

IP20



Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	12
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.9
Luminous Flux (lm)	727
Color temperature (K)	3000K
Opening angle degrees	110
Light orientation	Direct
Tilt angles	190
Rotation angles 2	180
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	300 mA
Structure material	Aluminium + Steel
Diffuser material	PMMA
Structure finish	Matt Black
Diffuser finish	Opal

Installation instructions

Energy label

Photometric

