MANI White recessed lamp
Ref. 70288

IK07 IP65





Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	5
Energy class light source	F
Light source	SMD LED
Lifespan	25.000h L70 B10
Power factor	0.5
Luminous Flux (lm)	722
Color temperature (K)	2200/ 2700/ 3200/ 4000K
Light orientation	Direct
Photobiological risk	1
CRI	≥80
Suitable for seaside areas	No
Control System	On/off
Supply current	250 mA
Switch type	Push
Cable length	250 mm
Structure material	Aluminium
Diffuser material	PC
Structure finish	White
Diffuser finish	Transparent
Cut-out Size for Recessed Mount	66x140
Includes recessed box	Yes
Included Accessory	Caja de empotrar

Installation instructions

Energy label


Photometric



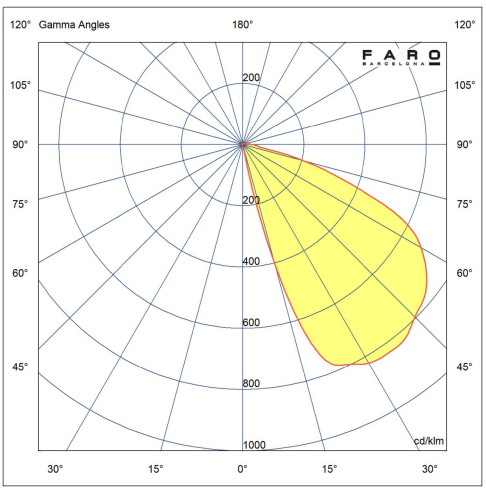


FARO
BARCELONA

MANI White recessed lamp
Ref. 70288

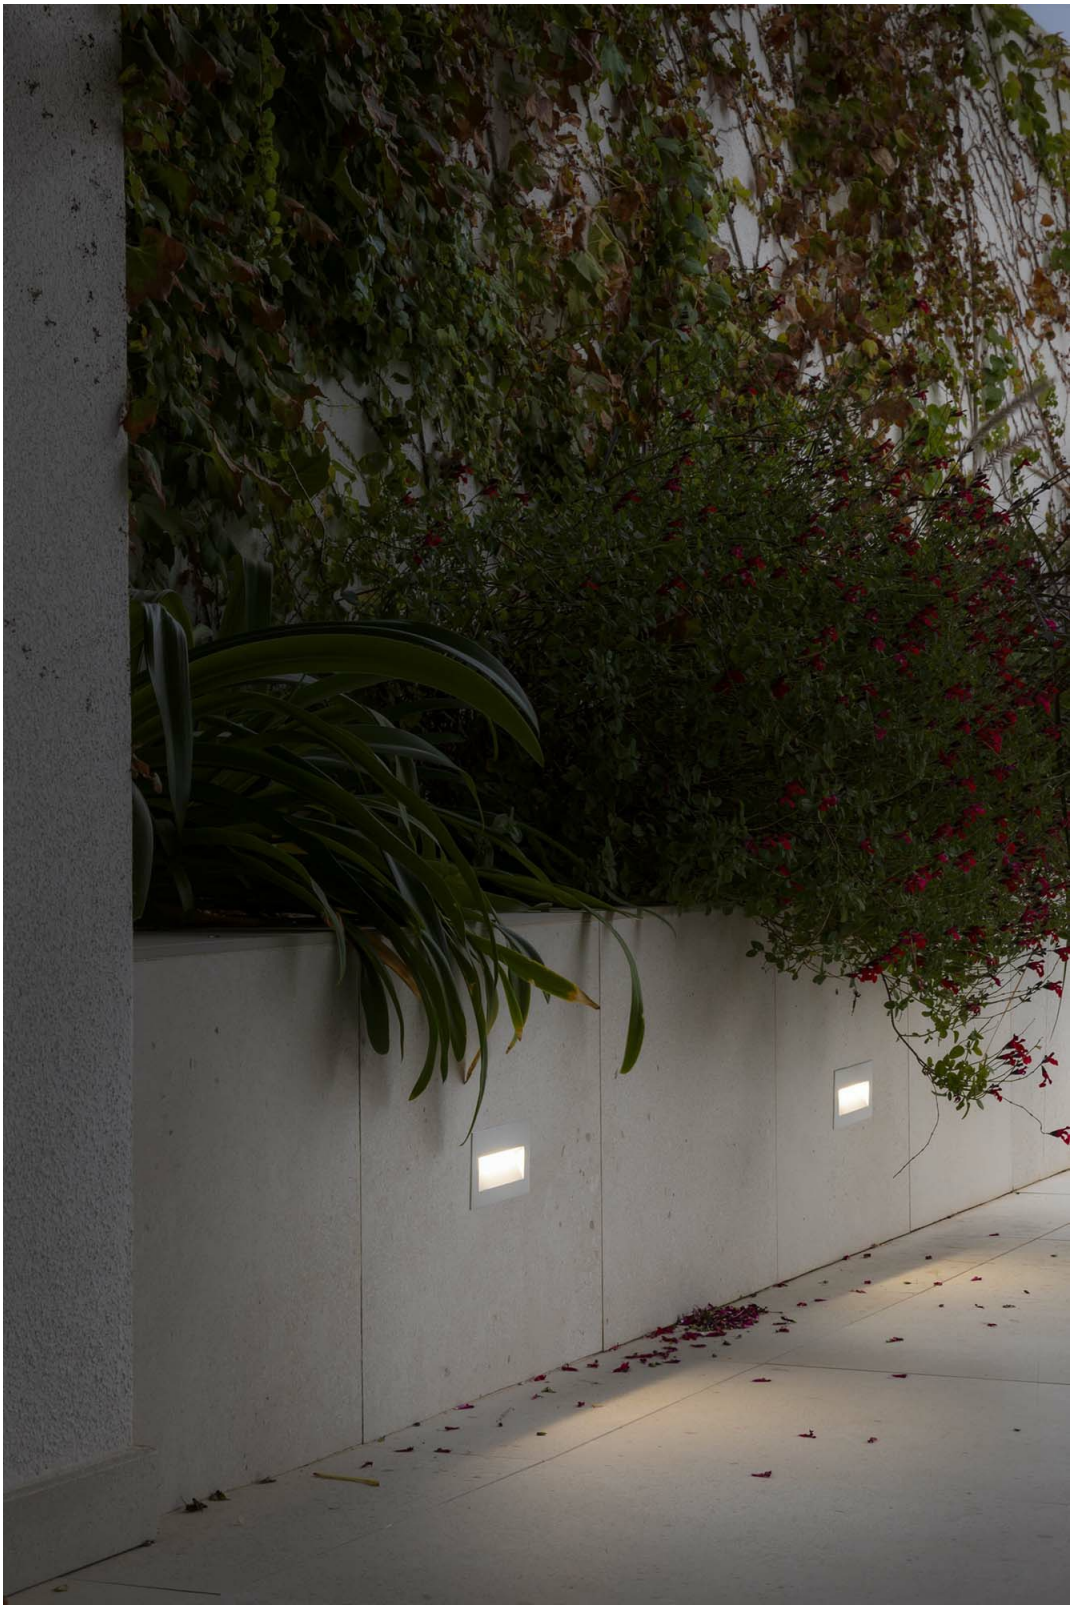

MANI Dark grey recessed lamp
Ref. 70289

IK07 IP65

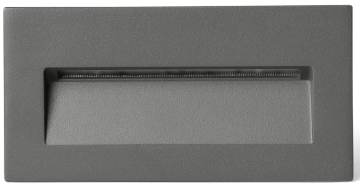



Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	07
Power (W)	5
Energy class light source	F
Light source	SMD LED
Lifespan	25.000h L70 B10
Power factor	0.5
Luminous Flux (lm)	365
Color temperature (K)	2200/ 2700/ 3200/ 4000K
Light orientation	Direct
Photobiological risk	1
CRI	≥80
Suitable for seaside areas	No
Control System	On/off
Supply current	250 mA
Switch type	Push
Cable length	250 mm
Structure material	Aluminium
Diffuser material	PC
Structure finish	Dark Grey
Diffuser finish	Transparent
Cut-out Size for Recessed Mount	66x140
Includes recessed box	Yes
Included Accessory	Caja de empotrar

Installation instructions

Energy label

Photometric



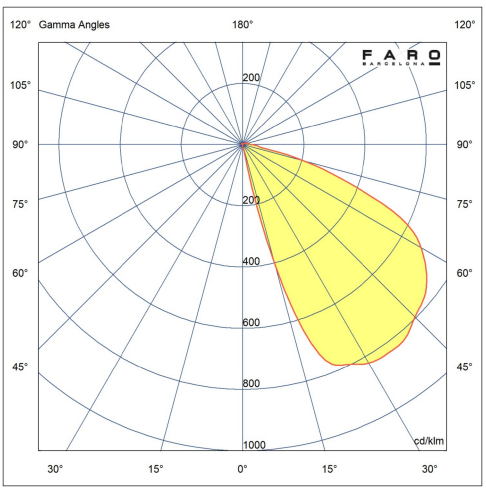

MANI Dark grey recessed lamp
Ref. 70289

