

FARO
BARCELONA

MARLIN Black pendant lamp
Ref. 64133

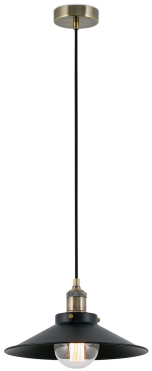



IP20

Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	ST64
Number of lamp holders	1
Light orientation	Direct-Indirect
Cable length	1800 mm
Structure material	Steel
Shade material	Steel
Structure finish	Antique Gold
Shade finish	Matt Black

Installation instructions


MARLIN Black pendant lamp
Ref. 64133

Recommended bulbs



Bulb DECORATIVE FILAMENT LED AMBER E27 4W 2200K

Reference	17428
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	4
Luminous Flux (lm)	400
Color temperature (K)	2200K
Opening angle degrees	360



Bulb Filament Burner E27 LED 5W 2700K Amber

Reference	17424
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	5
Luminous Flux (lm)	612
Color temperature (K)	2700K
Opening angle degrees	360



Bulb AMBAR E27 5W 2000K DIMMABLE 250Lm

Reference	17409
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	5
Luminous Flux (lm)	380
Color temperature (K)	2000K
Opening angle degrees	360

Related accessories

MARLIN Black pendant lamp
Ref. 64133



KIT track adapter / connector for suspension white

Reference	01997001
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	PC



KIT track adapter /connector for suspension black

Reference	01997002
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	PC

MARLIN Black pendant lamp
Ref. 64133




FARO
BARCELONA

MARLIN 3L Black pendant lamp
Ref. 64133-3l

IP20



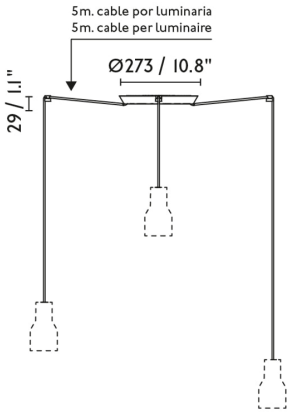

Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	ST64
Number of lamp holders	3
Light orientation	Direct-Indirect
Cable length	1800 mm
Structure material	Steel
Shade material	Steel
Structure finish	Antique Gold
Shade finish	Matt Black

Installation instructions


MARLIN 3L Black pendant lamp
Ref. 64133-3l

Recommended bulbs



Bulb DECORATIVE FILAMENT LED AMBER E27 4W 2200K

Reference	17428
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	4
Luminous Flux (lm)	400
Color temperature (K)	2200K
Opening angle degrees	360



Bulb Filament Burner E27 LED 5W 2700K Amber

Reference	17424
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	5
Luminous Flux (lm)	612
Color temperature (K)	2700K
Opening angle degrees	360



Bulb AMBAR E27 5W 2000K DIMMABLE 250Lm

Reference	17409
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	5
Luminous Flux (lm)	380
Color temperature (K)	2000K
Opening angle degrees	360

MARLIN 5L Black pendant lamp


Ref. 64133-5l

IP20



Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	ST64
Number of lamp holders	5
Light orientation	Direct-Indirect
Cable length	1800 mm
Structure material	Steel
Shade material	Steel
Structure finish	Antique Gold
Shade finish	Matt Black

Installation instructions

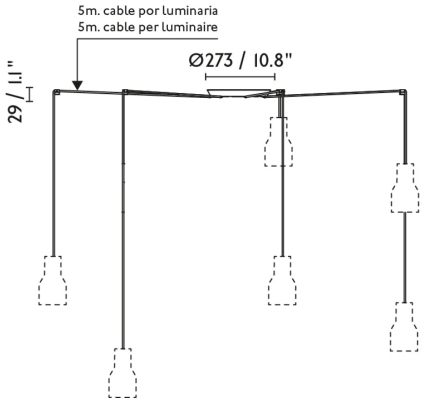


MARLIN 5L Black pendant lamp
Ref. 64133-5l

Recommended bulbs



Bulb DECORATIVE FILAMENT LED AMBER E27 4W 2200K

Reference	17428
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	4
Luminous Flux (lm)	400
Color temperature (K)	2200K
Opening angle degrees	360



Bulb Filament Burner E27 LED 5W 2700K Amber

Reference	17424
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	5
Luminous Flux (lm)	612
Color temperature (K)	2700K
Opening angle degrees	360



Bulb AMBAR E27 5W 2000K DIMMABLE 250Lm

Reference	17409
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	5
Luminous Flux (lm)	380
Color temperature (K)	2000K
Opening angle degrees	360

MARLIN 7L Black pendant lamp


Ref. 64133-7l

IP20



Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	ST64
Number of lamp holders	7
Light orientation	Direct-Indirect
Cable length	1800 mm
Structure material	Steel
Shade material	Steel
Structure finish	Antique Gold
Shade finish	Matt Black

Installation instructions

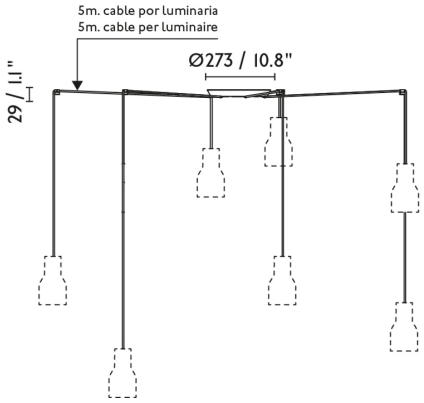


MARLIN 7L Black pendant lamp
Ref. 64133-7l

Recommended bulbs



Bulb DECORATIVE FILAMENT LED AMBER E27 4W 2200K

Reference	17428
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	4
Luminous Flux (lm)	400
Color temperature (K)	2200K
Opening angle degrees	360



Bulb Filament Burner E27 LED 5W 2700K Amber

Reference	17424
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	5
Luminous Flux (lm)	612
Color temperature (K)	2700K
Opening angle degrees	360



Bulb AMBAR E27 5W 2000K DIMMABLE 250Lm

Reference	17409
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	5
Luminous Flux (lm)	380
Color temperature (K)	2000K
Opening angle degrees	360