
MONTREAL Chrome/white wall lamp with reading light

Ref. 24033-01 |NAHTRANG

IP20




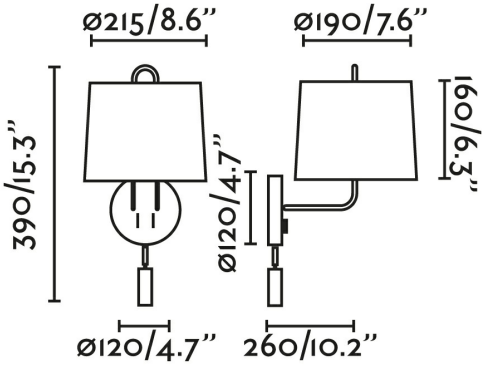

Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	A60
Number of lamp holders	1
Power factor	0.4
Opening angle degrees	45
Light orientation	Direct
Photobiological risk	0
Power reader (W)	3
Color temperature reading light (K)	2700K
Reading light lumens (lm)	122
Reading light beam angle	34
CRI	>80
Supply current	700 mA
Switch type	On/Off
Structure material	Steel
Shade material	Textile
Structure finish	Chrome-Plated
Shade finish	White
Reader finish	Chrome-Plated

Installation instructions

Photometric

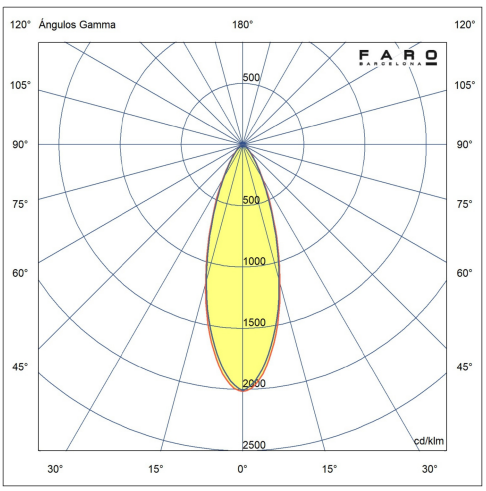

MONTREAL Chrome/white wall lamp with reading light
Ref. 24033-01 |NAHTRANG

Recommended bulbs



Bulb A60 MAT LED E27 8W 2700K

Reference	17463
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360

MONTREAL Chrome/white wall lamp with reading light
Ref. 24033-01 |NAHTRANG




MONTREAL Chrome/beige wall lamp with reading light

Ref. 24033-02 |NAHTRANG

IP20




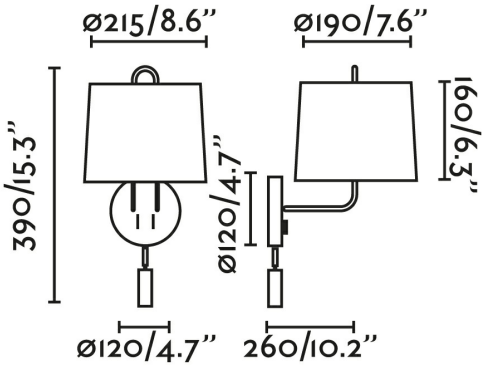

Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	A60
Number of lamp holders	1
Power factor	0.4
Opening angle degrees	45
Light orientation	Direct
Photobiological risk	0
Power reader (W)	3
Color temperature reading light (K)	2700K
Reading light lumens (lm)	122
Reading light beam angle	34
CRI	>80
Supply current	700 mA
Switch type	On/Off
Structure material	Steel
Shade material	Textile
Structure finish	Chrome-Plated
Shade finish	Beige
Reader finish	Chrome-Plated

Installation instructions

Photometric

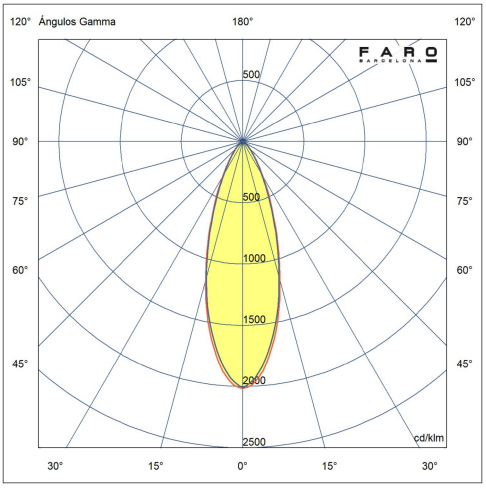

MONTREAL Chrome/beige wall lamp with reading light

Ref. 24033-02 |NAHTRANG

Recommended bulbs



Bulb A60 MAT LED E27 8W 2700K

Reference	17463
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360

MONTREAL Chrome/beige wall lamp with reading light
Ref. 24033-02 |NAHTRANG



MONTREAL Chrome/black wall lamp with reading light

Ref. 24033-03 |NAHTRANG


IP20




Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Light source	E27 LED
Bulb format	A60
Number of lamp holders	1
Power factor	0.4
Opening angle degrees	45
Light orientation	Direct
Photobiological risk	0
Power reader (W)	3
Color temperature reading light (K)	2700K
Reading light lumens (lm)	122
Reading light beam angle	34
CRI	>80
Supply current	700 mA
Switch type	On/Off
Structure material	Steel
Shade material	Textile
Structure finish	Chrome-Plated
Shade finish	Black
Reader finish	Chrome-Plated

Installation instructions

Photometric

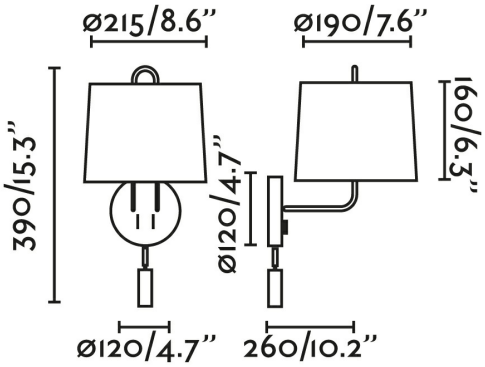

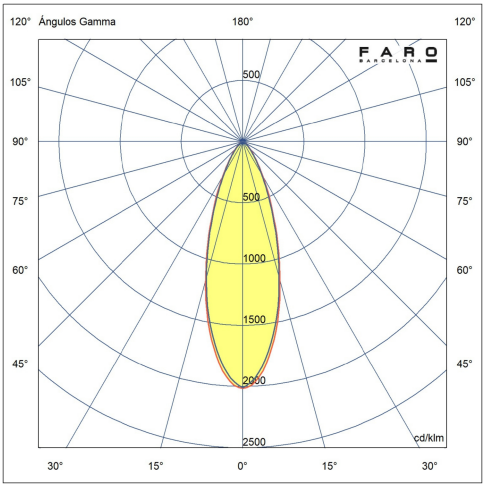

MONTREAL Chrome/black wall lamp with reading light

Ref. 24033-03 |NAHTRANG

Recommended bulbs



Bulb A60 MAT LED E27 8W 2700K

Reference	17463
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360



Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360

MONTREAL Chrome/black wall lamp with reading light
Ref. 24033-03 |NAHTRANG

